

Compact cylinder, double-acting ADN-S

FESTO



Characteristics

At a glance

[Link ↗ adn-s](#)

- Very compact design: shorter than comparable cylinders
- Reduced housing length: saving materials and weight
- Reduced housing width: for space-critical applications
- Large selection: standard strokes 5 ... 50 mm
- Design by Festo: visually compelling

Diagrams

[Link ↗ adn-s](#)

The diagrams shown in this document are also available online. These can be used to display precise values.

Design type

[S] Short

Particularly suitable for applications where space is critical

Piston rod thread type

[A] Male thread




[I] Female thread



Cushioning

[P] Elastic cushioning rings/plates on both sides



The drive is fitted with elastic polymer end-position cushioning.

Benefits:

- No adjustment required
- Saves time

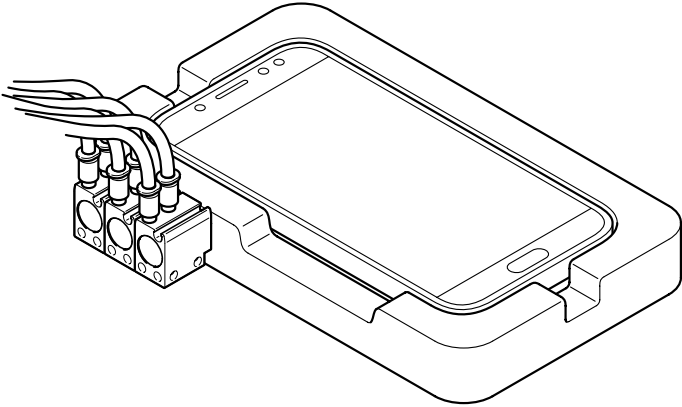
Position sensing

[A] For proximity sensor

By using proximity switches, any position can be detected.

Characteristics

Application example



- Endurance testing of smartphone buttons

Type code

001	Series	
ADN	Compact cylinder, double-acting	

002	Design type	
S	Short	

003	Piston diameter [mm]	
6	6	
10	10	
12	12	
16	16	
20	20	
25	25	
32	32	
40	40	
50	50	
63	63	

004	Stroke [mm]	
5	5	
10	10	
15	15	
20	20	
25	25	
30	30	
35	35	
40	40	
45	45	
50	50	

005	Piston rod thread type	
	Female thread	
A	Male thread	
I	Female thread	

006	Cushioning	
	No cushioning	
P	Elastic cushioning rings/plates on both sides	

007	Position sensing	
	None	
A	For proximity sensor	

008	Special material properties	
	None	
F1A	Recommended for production plants for manufacturing lithium-ion batteries, F1A	

Datasheet

General technical data

Piston diameter	6 mm	10 mm	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Stroke	5 mm, 10 mm		5 mm, 10 mm, 15 mm, 20 mm, 25 mm, 30 mm, 35 mm		5 mm, 10 mm, 15 mm, 20 mm, 25 mm, 30 mm, 35 mm, 40 mm, 45 mm, 50 mm					
Design	Piston Piston rod									
Mode of operation	Double-acting									
Piston-rod end	Male thread Female thread									
Pneumatic connection	M3		M5						G1/8	
Cushioning	No cushioning		Elastic cushioning rings/plates at both ends							
Position detection	Via proximity switch									
Type of mounting	With through-hole		Either: With through-hole Via female thread With accessories							
Mounting position	optional									

Operating and environmental conditions

Piston diameter	6 mm	10 mm	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Operating pressure ¹⁾	0.2 ... 0.8 MPa	0.1 ... 0.8 MPa	0.1 ... 1 MPa		0.06 ... 1 MPa				0.04 ... 1 MPa	
Operating pressure ²⁾	2 ... 8 bar	1 ... 8 bar	1 ... 10 bar		0.6 ... 10 bar				0.4 ... 10 bar	
Operating pressure ³⁾	21.75 ... 116 psi	14.5 ... 116 psi	14.5 ... 145 psi		8.7 ... 145 psi				5.8 ... 145 psi	
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]									
Note on operating and pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)									
Ambient temperature ⁴⁾	-10 ... 60°C		0 ... 80°C							
Corrosion resistance class CRC ⁵⁾	1 - Low corrosion stress 2 - Moderate corrosion stress					0 - No corrosion stress 1 - Low corrosion stress 2 - Moderate corrosion stress				

1) The minimum pressure specifications only apply after 10 double strokes.

2) The minimum pressure specifications only apply after 10 double strokes.

3) The minimum pressure specifications only apply after 10 double strokes.

4) Note operating range of proximity switches.

5) Corrosion resistance class for each individual type → Ordering information.

More information www.festo.com/x/topic/kbk

Forces

Piston diameter	6 mm	10 mm	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Theoretical force at 0.6 MPa (6 bar, 87 psi), advance stroke	17 N	47 N	68 N	121 N	188 N	295 N	483 N	754 N	1,178 N	1,870 N
Theoretical force at 0.6 MPa (6 bar, 87 psi), return stroke	9.4 N	30.2 N	51 N	90 N	141 N	247 N	415 N	686 N	1,057 N	1,750 N

Impact energy without position sensing

Piston diameter	6 mm	10 mm	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Impact energy in end positions	0.006 J	0.012 J	0.06 J	0.1 J	0.14 J	0.18 J	0.26 J	0.36 J	0.6 J	0.64 J

Impact energy with position sensing

Piston diameter	6 mm	10 mm	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Impact energy in end positions	0.006 J	0.012 J	0.07 J	0.15 J	0.2 J	0.3 J	0.4 J	0.7 J	1 J	1.3 J

Weight without position sensing – ADN-S-6 ... 10

Piston diameter	6 mm					10 mm				
Stroke	5 mm			10 mm		5 mm			10 mm	
Product weight	9.2 g			15 g		17 g			19 g	
Moving mass	1.5 g			2.3 g		4.1 g			5.3 g	

Datasheet

Weight without position sensing and for battery production – ADN-S-6 ... 10

Piston diameter	6 mm		10 mm	
Stroke	5 mm	10 mm	5 mm	10 mm
Product weight	9.2 g	11.9 g	12.2 g	15.4 g
Moving mass	1.5 g	2.3 g	4.1 g	5.3 g

Weight with position sensing – ADN-S-6 ... 10

Piston diameter	6 mm		10 mm	
Stroke	5 mm	10 mm	5 mm	10 mm
Product weight	10.9 g	15 g	17 g	19 g
Moving mass	1.6 g	2.4 g	4.5 g	5.7 g

Weight with position sensing and for battery production – ADN-S-6 ... 10


Piston diameter	6 mm		10 mm	
Stroke	5 mm	10 mm	5 mm	10 mm
Product weight	10.9 g	13.6 g	14.5 g	17.7 g
Moving mass	1.6 g	2.4 g	4.5 g	5.7 g

Weight without position sensing – ADN-S-12 ... 63

Piston diameter	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Basic weight for 0 mm stroke	26 g	32.5 g	51 g	70 g	107 g	186 g	310 g	505 g
Additional weight per 10 mm stroke	15 g	18 g	26 g	30 g	36 g	45 g	63 g	76 g
Moving mass for 0 mm stroke	3.5 g	6 g	11 g	17 g	31 g	56 g	105 g	175 g
Additional moving mass per 10 mm stroke	2 g	4 g	6 g	9 g	16 g			

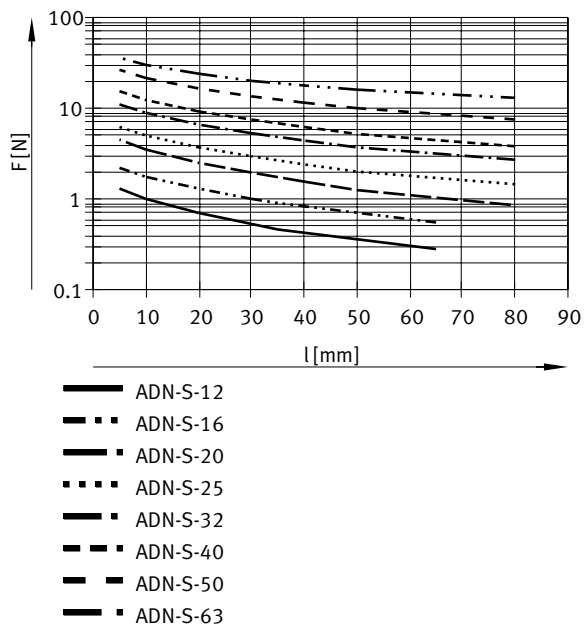
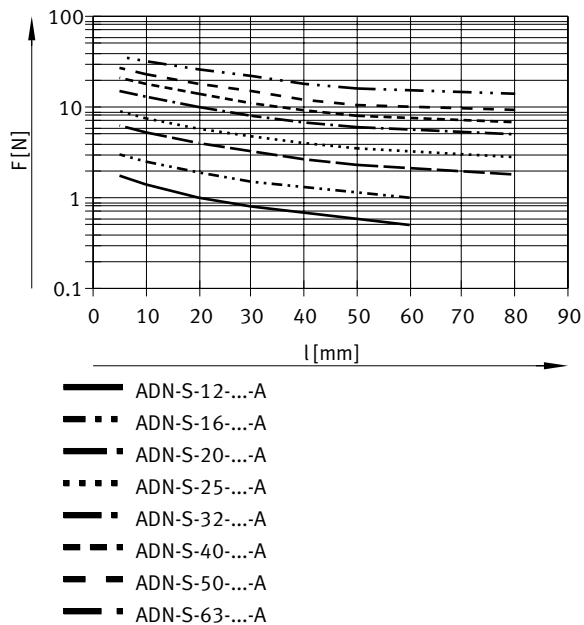
Weight with position sensing – ADN-S-12 ... 63

Piston diameter	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Basic weight for 0 mm stroke	33 g	42 g	65 g	88 g	117 g	304 g	324 g	499 g
Additional weight per 10 mm stroke	15 g	18 g	26 g	30 g	36 g	45 g	63 g	77 g
Moving mass for 0 mm stroke	6 g	11 g	18 g	25 g	37 g	62 g	104 g	151 g
Additional moving mass per 10 mm stroke	2 g	4 g	6 g	9 g	16 g			

Max. transverse force F_q as a function of cantilever load l 

The piston $\varnothing 6 \dots 10$ must not be subjected to transverse forces. More information
→ www.festo.com User documentation.

Datasheet

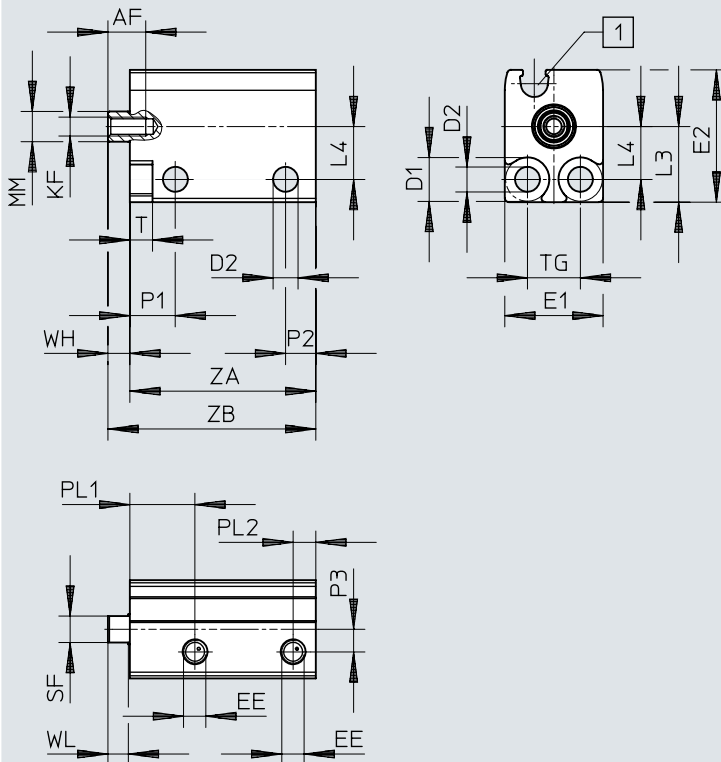
Max. transverse load F_q as a function of projection l – without position sensingMax. lateral force F_q as a function of projection l – with position sensing

Datasheet

Materials										
Piston diameter	6 mm	10 mm	12 mm	16 mm	20 mm	25 mm	32 mm	40 mm	50 mm	63 mm
Material housing	Wrought aluminium alloy Anodised wrought aluminium alloy Anodised		Anodised wrought aluminium alloy							
Material cover	Wrought aluminium alloy		Anodised wrought aluminium alloy							
Material piston rod	High-alloy stainless steel									
Material dynamic seals	NBR TPE-U(PU)									
Note on materials	RoHS-compliant									
LABS (PWIS) conformity	VDMA24364-B2-L									
Cleanroom suitability, measured according to ISO 14644-14	Class 5 according to ISO 14644-1									
Suitability for the production of Li-ion batteries	Suitable for battery production with reduced Cu/Zn/Ni values (F1a)									

Dimensions

Dimensions – ADN-S-6 ... 10 – with female thread

Download CAD data www.festo.com

[1] C-slot for proximity switch



	AF min.	D1 ø H13	D2 ø	EE	E1 max.	E2 max.	KF	L3	L4	MM ø
ADN-S-6	5	5,8	3,3	M3	13	17,5	M2,5	10	7	4
ADN-S-10	6				13,5	20,5	M3	11	8	6

	P1	P2	P3	PL2	SF	T	TG ±0,1	WH	WL
ADN-S-6	6	4	3	3	3,5	3	7	3	2,7
ADN-S-10			3,2		5				

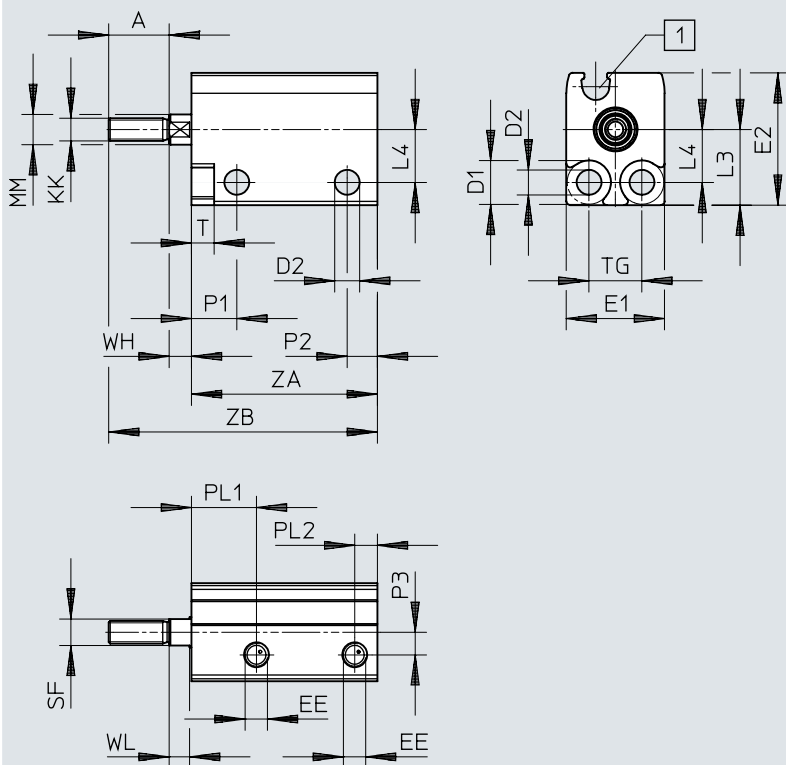
	L ¹⁾ [mm]	2)	PL1	ZA +0,3	ZB ±0,35
ADN-S-6	5	–	8,6	20,5	23,5
		■	8,6	24,5	27,5
	10	–	8,6	25,5	28,5
		■	8,6	29,5	32,5
ADN-S-10	5	–	9,2	20,5	23,5
		■	9,9	24,5	27,5
	10	–	9,2	25,5	28,5
		■	9,9	29,5	32,5

- 1) Stroke
2) Position sensing

Dimensions

Dimensions – ADN-S-6 ... 10 – with male thread

Download CAD data www.festo.com



[1] C-slot for proximity switch

	A	D1 ø H13	D2 ø	EE	E1 max.	E2 max.	KK	L3	L4	MM ø
ADN-S-6	8	5,8	3,3	M3	13	17,5	M3	10	7	4
ADN-S-10	10				13,5	20,5	M4	11	8	6

	P1	P2	P3	PL2	SF	T	TG ±0,1	WH	WL
ADN-S-6	6	4	3	3	3,5	3	7	3	2,7
ADN-S 10			3,2		5				

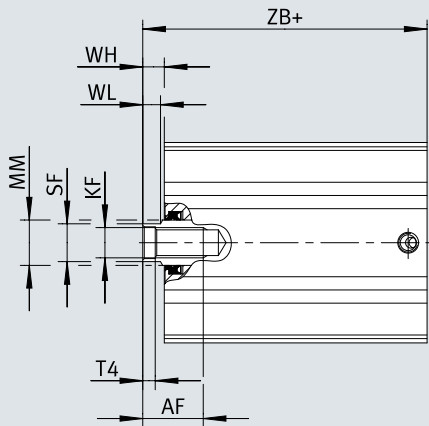
	L ¹⁾ [mm]	2)	PL1	ZA +0,3	ZB ±0,35
ADN-S 6	5	–	8,6	20,5	31,5
		■	8,6	24,5	35,5
	10	–	8,6	25,5	36,5
		■	8,6	29,5	40,5
ADN-S 10	5	–	9,2	20,5	33,5
		■	9,9	24,5	37,5
	10	–	9,2	25,5	38,5
		■	9,9	29,5	42,5

1) Stroke

2) Position sensing

Dimensions

Dimensions – ADN-S-12 ... 63 – with female thread

 Download CAD data www.festo.com


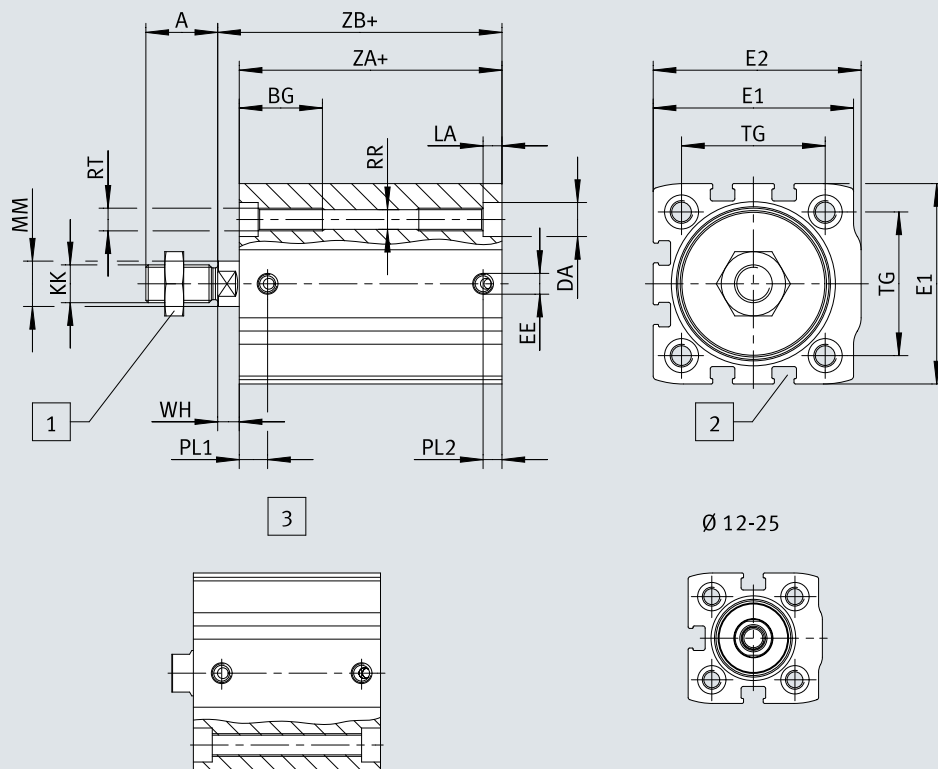
[1] + = plus stroke length

	AF	KF	MM	SF	T4	WH	WL	ZB	
								+1,2	1) +1,2
	min.		h8	h13		+1	-0,15		
ADN-S-12	8	M3	6	5	1,5	2,5	2,7	18	22
ADN-S-16	10	M4	8	7	1,5	3	3,5	19	23,5
ADN-S-20	11	M6	10	9	2,6	3	4	20,5	25
ADN-S-25	11	M6	10	9	2,6	3,5	4,2	22,5	27
ADN-S-32	12	M8	12	10	3,3	4	4,7	25,5	29
ADN-S-40	16	M8	12	10	3,3	5	4,7	31	34,5
ADN-S-50	16	M10	16	13	4,7	7	6,5	36	39
ADN-S-63	20	M10	16	13	4,7	7	6,5	39	42

1) Position sensing

Dimensions

Dimensions – ADN-S-12 ... 63 – with male thread

Download CAD data www.festo.com

- [1] Hex nut DIN 439-B only from $\varnothing 32$
- [2] T-slot for proximity switch
- [3] Continuous thread $\varnothing 12 \dots 25$: ZA 0 ... 40, $\varnothing 32 \dots 63$: ZA 0 ... 50
- [4] + = plus stroke length

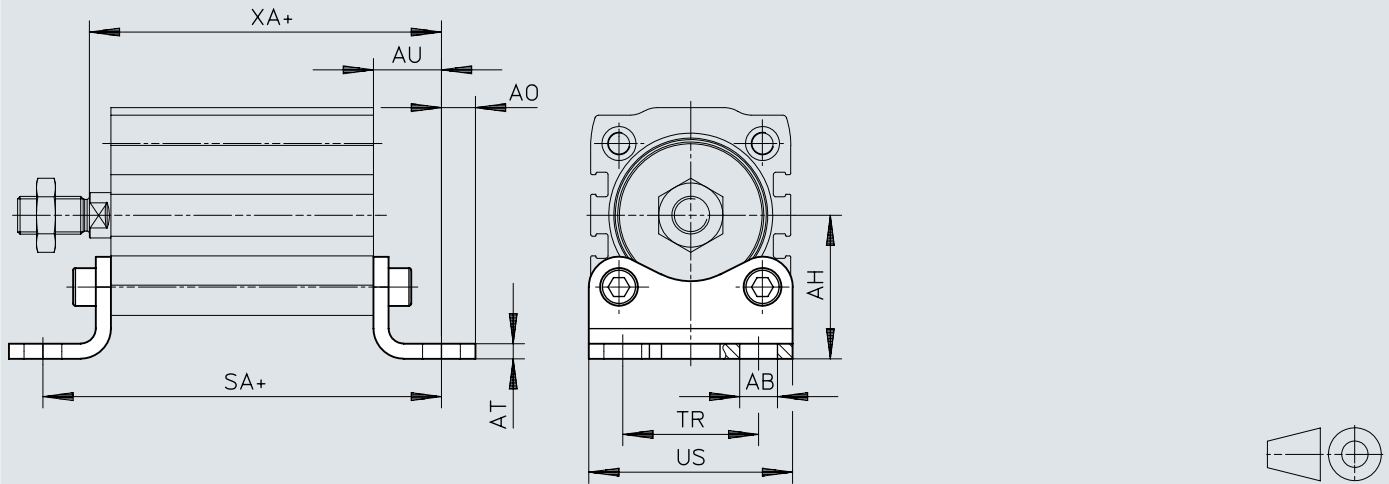
	A	BG	DA	E1	E2	EE	KK	LA	MM	PL1
	-0,5	min.	F9					±0,1	h8	
ADN-S-12	10	19	6	27 _{+0,15}	27,5 _{+0,15}	M5	M5	3,5	6	5
ADN-S-16	12	19	6	29 _{+0,15}	30 _{+0,15}	M5	M6	3,5	8	6
ADN-S-20	16	20	7,5	34,5 _{+0,15}	35,5 _{+0,15}	M5	M8	5	10	6
ADN-S-25	16	20	7,5	38,5 _{+0,15}	39,5 _{+0,15}	M5	M8	5	10	5,5
ADN-S-32	19	22	9	45 _{+0,15}	47 _{+0,15}	M5	M10x1,25	5	12	6,1
ADN-S-40	19	22	9	53 _{+0,15}	55 _{+0,15}	M5	M10x1,25	5	12	7,5
ADN-S-50	22	23	11	63 _{+0,2}	66 _{+0,2}	G1/8	M12x1,25	5	16	8,2
ADN-S-63	22	23	11	75 _{+0,2}	78,5 _{+0,2}	G1/8	M12x1,25	5	16	8,5

	PL2	RR	RT	TG	WH	ZA		ZB	
							1)		1)
					+1	+0,2	+0,2	+1,2	+1,2
ADN-S-12	5	3,5	M4	16	2,5	15,5	19,5	18	22
ADN-S-16	5	3,5	M4	18	3	16	20,5	19	23,5
ADN-S-20	5	4,2	M5	22	3	17,5	22	20,5	25
ADN-S-25	5	4,2	M5	26	3,5	19	23,5	22,5	27
ADN-S-32	5	5,6	M6	32,5	4	21,5	25	25,5	29
ADN-S-40	5	5,6	M6	38	5	26	29,5	31	34,5
ADN-S-50	7,5	7,45	M8	46,5	7	29	32	36	39
ADN-S-63	8	7,45	M8	56,5	7	32	35	39	42

- 1) Position sensing

Dimensions

Dimensions – Foot mounting HNA (part 1 of 2)

[Download CAD data](#) www.festo.com


[1] + = plus stroke length

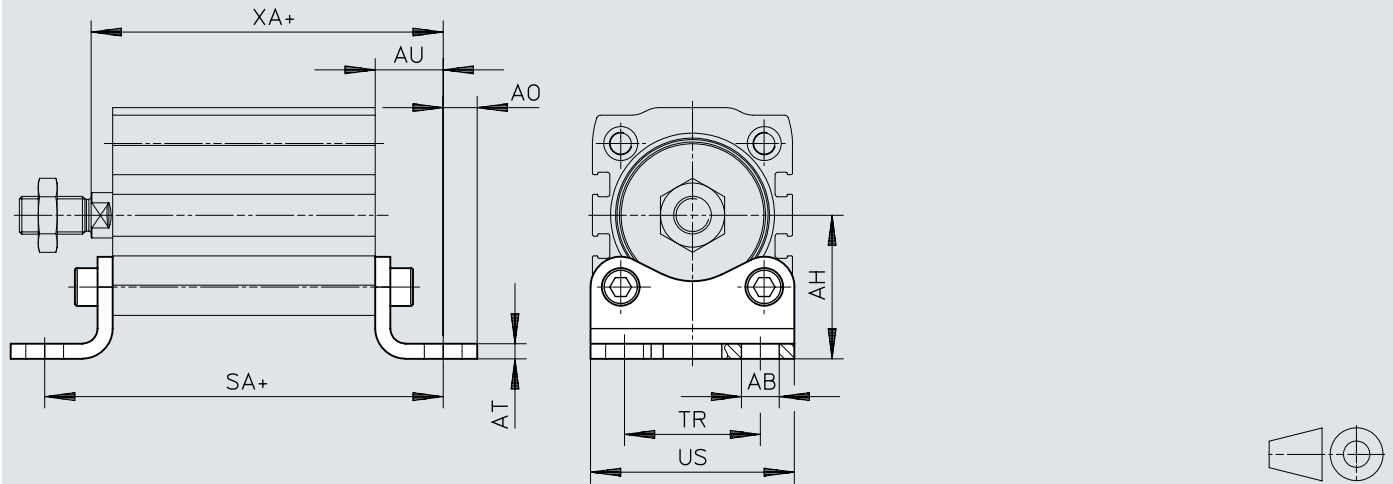
	AB ø	AH	AO	AT	AU	SA ³⁾		TR	US	XA ³⁾	
	H14	JS14		±0,5	±0,2	+0,2	²⁾ +0,2	±0,2	-0,5	+1,2	²⁾ +1,2
HNA-12	5,8	21	5	3	13	41,5	45,5	16	26	31	35
HNA-16	5,8	22	4,75	3	13	42	46,5	18	27,5	32	36,5
HNA-20	7	27	6,25	4	16	49,5	54	22	34,5	36,5	41
HNA-25	7	29	6,25	4	16	51	55,5	26	38,5	38,5	43
HNA-32	7	33,5	7	4	16	53,5	57	32	46	41,5	45
HNA-40	10	38	9	4	18	62	65,5	36	54	49	52,5
HNA-50	10	45	8	5	21	71	74	45	64	57	60
HNA-63	10	50	8	5	21	74	77	50	75	60	63

²⁾ Position sensing

³⁾ Deviating dimensions for the strokes 5, 10 and 25

Dimensions

Dimensions – Foot mounting HNA (part 2 of 2) [Download CAD data](#) www.festo.com



[1] + = plus stroke length

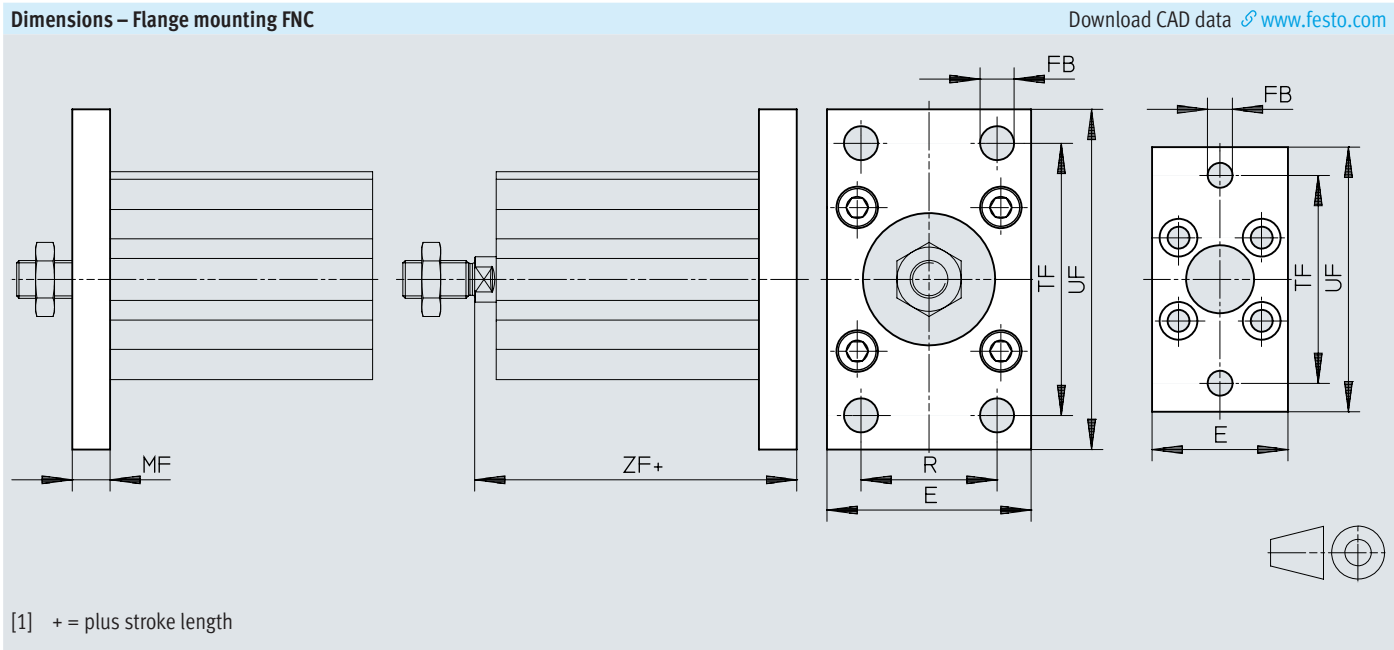
Dimensions

	L ¹⁾ [mm]	2)	SA +0,2	XA +1,2
HNA-12	5	—	46,5	36
		■	50,5	40
	10	—	51,5	41
		■	55,5	45
HNA-16	5	—	47	37
		■	51,5	41,5
	10	—	52	42
		■	56,5	46,5
	25	—	69	59
		■	74,5	64,5
HNA-20	5	—	54,5	41,5
		■	59	46
	10	—	59,5	46,5
		■	64	51
	25	—	77,5	64,5
		■	82	69
HNA-25	5	—	56	43,5
		■	60,5	48
	10	—	61	48,5
		■	65,5	53
	25	—	79	66,5
		■	83,5	71
HNA-32	5	—	58,5	46,5
		■	62	50
	10	—	63,5	51,5
		■	67	55
	25	—	81,5	69,5
		■	85	73
HNA-40	5	—	67	54
		■	70,5	57,5
	10	—	72	59
		■	75,5	62,5
	25	—	90	77
		■	93,5	80,5
HNA-50	10	—	81	67
		■	84	70
	25	—	98,5	84,5
		■	102	88
HNA-63	10	—	84	70
		■	87	73
	25	—	101,5	87,5
		■	104,5	90,5

1) Stroke

2) Position sensing

Dimensions



Dimensions

	E	FB ø	MF	R	TF	UF ±1	ZF	
							+0,2	²⁾ +0,2
FNC-12	28	5,5	8	–	40	50	26	30
FNC-16	29	5,5	8	–	43	55	27	31,5
FNC-20	36	6,6	8	–	55	70	28,5	33
FNC-25	40	6,6	8	–	60	76	30,5	35
FNC-32	45	7	10	32	64	80	35,5	39
FNC-40	54	9	10	36	72	90	41	44,5
FNC-50	65	9	12	45	90	110	48	51
FNC-63	75	9	12	50	100	120	51	54

	L ¹⁾ [mm]	²⁾	ZF +0,2
FNC-12	5	–	31
		■	35
	10	–	36
		■	40
FNC-16	5	–	32
		■	36,5
	10	–	37
		■	41,5
	25	–	54
		■	59,5
FNC-20	5	–	33,5
		■	38
	10	–	38,5
		■	43
	25	–	56,5
		■	61
FNC-25	5	–	35,5
		■	40
	10	–	40,5
		■	45
	25	–	58,5
		■	63
FNC-32	5	–	40,5
		■	44
	10	–	45,5
		■	49
	25	–	63,5
		■	67
FNC-40	5	–	46
		■	49,5
	10	–	51
		■	54,5
	25	–	69
		■	72,5
FNC-50	10	–	58
		■	61
	25	–	75,5
		■	79
FNC-63	10	–	61
		■	64
	25	–	78,5
		■	81,5

1) Stroke

2) Position sensing

Ordering data

With female thread – I					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	2 - Moderate corrosion stress	4886885	ADN-S-6-5-I
		10 mm		4886886	ADN-S-6-10-I
	10 mm	5 mm		4887523	ADN-S-10-5-I
		10 mm		4887524	ADN-S-10-10-I

1) More information www.festo.com/x/topic/kbk

With female thread – I; with position sensing – A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	1 - Low corrosion stress	5173732	ADN-S-6-5-I-A
		10 mm		5173733	ADN-S-6-10-I-A
	10 mm	5 mm		5177082	ADN-S-10-5-I-A
		10 mm		5177085	ADN-S-10-10-I-A

1) More information www.festo.com/x/topic/kbk

With female thread – I; for battery production – F1A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	2 - Moderate corrosion stress	8142509	ADN-S-6-5-I-F1A
		10 mm		8142510	ADN-S-6-10-I-F1A
	10 mm	5 mm		8142518	ADN-S-10-5-I-F1A
		10 mm		8142519	ADN-S-10-10-I-F1A

1) More information www.festo.com/x/topic/kbk

With female thread – I; with position sensing – A; for battery production – F1A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	2 - Moderate corrosion stress	8142511	ADN-S-6-5-I-A-F1A
		10 mm		8142512	ADN-S-6-10-I-A-F1A
	10 mm	5 mm		8142520	ADN-S-10-5-I-A-F1A
		10 mm		8142521	ADN-S-10-10-I-A-F1A

1) More information www.festo.com/x/topic/kbk

With male thread – A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	2 - Moderate corrosion stress	8080598	ADN-S-6-5-A
		10 mm		8080596	ADN-S-6-10-A
	10 mm	5 mm		8080589	ADN-S-10-5-A
		10 mm		8080588	ADN-S-10-10-A

1) More information www.festo.com/x/topic/kbk

Ordering data

With male thread – A; with position sensing – A

	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	2 - Moderate corrosion stress	8080597	ADN-S-6-5-A-A
		10 mm		8080595	ADN-S-6-10-A-A
	10 mm	5 mm		8080587	ADN-S-10-5-A-A
		10 mm		8080590	ADN-S-10-10-A-A

1) More information www.festo.com/x/topic/kbk

With male thread – A; for battery production – F1A

	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	2 - Moderate corrosion stress	8142513	ADN-S-6-5-A-F1A
		10 mm		8142514	ADN-S-6-10-A-F1A
	10 mm	5 mm		8142522	ADN-S-10-5-A-F1A
		10 mm		8142523	ADN-S-10-10-A-F1A

1) More information www.festo.com/x/topic/kbk

With male thread – A; with position sensing – A; for battery production – F1A

	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	6 mm	5 mm	2 - Moderate corrosion stress	8142515	ADN-S-6-5-A-A-F1A
		10 mm		8142516	ADN-S-6-10-A-A-F1A
	10 mm	5 mm		8142517	ADN-S-10-5-A-A-F1A
		10 mm		8142524	ADN-S-10-10-A-A-F1A

1) More information www.festo.com/x/topic/kbk

With cushioning – P; with female thread – I

	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	12 mm	5 mm	1 - Low corrosion stress	8076407	ADN-S-12-5-I-P
		10 mm		8076419	ADN-S-12-10-I-P
		15 mm		8076417	ADN-S-12-15-I-P
		20 mm		8076415	ADN-S-12-20-I-P
		25 mm		8076413	ADN-S-12-25-I-P
		30 mm		8076411	ADN-S-12-30-I-P
		35 mm		8076409	ADN-S-12-35-I-P
	16 mm	5 mm		8076393	ADN-S-16-5-I-P
		10 mm		8076405	ADN-S-16-10-I-P
		15 mm		8076403	ADN-S-16-15-I-P
		20 mm		8076401	ADN-S-16-20-I-P
		25 mm		8076399	ADN-S-16-25-I-P
		30 mm		8076397	ADN-S-16-30-I-P
		35 mm		8076395	ADN-S-16-35-I-P
	20 mm	5 mm		8076323	ADN-S-20-5-I-P
		10 mm		8076341	ADN-S-20-10-I-P
		15 mm		8076339	ADN-S-20-15-I-P
		20 mm		8076337	ADN-S-20-20-I-P
		25 mm		8076335	ADN-S-20-25-I-P
		30 mm		8076333	ADN-S-20-30-I-P
		35 mm		8076331	ADN-S-20-35-I-P
		40 mm		8076329	ADN-S-20-40-I-P
		45 mm		8076327	ADN-S-20-45-I-P

Ordering data

With cushioning – P; with female thread – I					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	20 mm	50 mm	1 - Low corrosion stress	8076325	ADN-S-20-50-I-P
	25 mm	5 mm		8076343	ADN-S-25-5-I-P
		10 mm		8076361	ADN-S-25-10-I-P
		15 mm		8076359	ADN-S-25-15-I-P
		20 mm		8076357	ADN-S-25-20-I-P
		25 mm		8076355	ADN-S-25-25-I-P
		30 mm		8076353	ADN-S-25-30-I-P
		35 mm		8076351	ADN-S-25-35-I-P
		40 mm		8076349	ADN-S-25-40-I-P
		45 mm		8076347	ADN-S-25-45-I-P
		50 mm		8076345	ADN-S-25-50-I-P
	32 mm	5 mm		8076364	ADN-S-32-5-I-P
		10 mm		8076382	ADN-S-32-10-I-P
		15 mm		8076380	ADN-S-32-15-I-P
		20 mm		8076378	ADN-S-32-20-I-P
		25 mm		8076376	ADN-S-32-25-I-P
		30 mm		8076374	ADN-S-32-30-I-P
		35 mm		8076372	ADN-S-32-35-I-P
		40 mm		8076370	ADN-S-32-40-I-P
		45 mm		8076368	ADN-S-32-45-I-P
		50 mm		8076366	ADN-S-32-50-I-P
	40 mm	5 mm		5138596	ADN-S-40-5-I-P
		10 mm		5138597	ADN-S-40-10-I-P
		15 mm		5138598	ADN-S-40-15-I-P
		20 mm		5138599	ADN-S-40-20-I-P
		25 mm		5138600	ADN-S-40-25-I-P
		30 mm		5138601	ADN-S-40-30-I-P
		35 mm		5138602	ADN-S-40-35-I-P
		40 mm		5138603	ADN-S-40-40-I-P
		45 mm		5138604	ADN-S-40-45-I-P
		50 mm		5138605	ADN-S-40-50-I-P
	50 mm	5 mm		5138178	ADN-S-50-5-I-P
		10 mm		5138179	ADN-S-50-10-I-P
		15 mm		5138180	ADN-S-50-15-I-P
		20 mm		5138181	ADN-S-50-20-I-P
		25 mm		5138182	ADN-S-50-25-I-P
		30 mm		5138183	ADN-S-50-30-I-P
		35 mm		5138184	ADN-S-50-35-I-P
		40 mm		5138185	ADN-S-50-40-I-P
		45 mm		5138186	ADN-S-50-45-I-P
		50 mm		5138187	ADN-S-50-50-I-P
	63 mm	5 mm		5132653	ADN-S-63-5-I-P
		10 mm		5132654	ADN-S-63-10-I-P
		15 mm		5132655	ADN-S-63-15-I-P
		20 mm		5132656	ADN-S-63-20-I-P
		25 mm		5132657	ADN-S-63-25-I-P
		30 mm		5132658	ADN-S-63-30-I-P
		35 mm		5132659	ADN-S-63-35-I-P
		40 mm		5132660	ADN-S-63-40-I-P
		45 mm		5132661	ADN-S-63-45-I-P
		50 mm		5132662	ADN-S-63-50-I-P

1) More information www.festo.com/x/topic/kbk

Ordering data

With cushioning – P; with female thread – I; with position sensing – A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	12 mm	5 mm	1 - Low corrosion stress	8076406	ADN-S-12-5-I-P-A
		10 mm		8076418	ADN-S-12-10-I-P-A
		15 mm		8076416	ADN-S-12-15-I-P-A
		20 mm		8076414	ADN-S-12-20-I-P-A
		25 mm		8076412	ADN-S-12-25-I-P-A
		30 mm		8076410	ADN-S-12-30-I-P-A
		35 mm		8076408	ADN-S-12-35-I-P-A
	16 mm	5 mm		8076392	ADN-S-16-5-I-P-A
		10 mm		8076404	ADN-S-16-10-I-P-A
		15 mm		8076402	ADN-S-16-15-I-P-A
		20 mm		8076400	ADN-S-16-20-I-P-A
		25 mm		8076398	ADN-S-16-25-I-P-A
		30 mm		8076396	ADN-S-16-30-I-P-A
		35 mm		8076394	ADN-S-16-35-I-P-A
	20 mm	5 mm		8076322	ADN-S-20-5-I-P-A
		10 mm		8076340	ADN-S-20-10-I-P-A
		15 mm		8076338	ADN-S-20-15-I-P-A
		20 mm		8076336	ADN-S-20-20-I-P-A
		25 mm		8076334	ADN-S-20-25-I-P-A
		30 mm		8076332	ADN-S-20-30-I-P-A
		35 mm		8076330	ADN-S-20-35-I-P-A
		40 mm		8076328	ADN-S-20-40-I-P-A
		45 mm		8076326	ADN-S-20-45-I-P-A
		50 mm		8076324	ADN-S-20-50-I-P-A
	25 mm	5 mm		8076342	ADN-S-25-5-I-P-A
		10 mm		8076360	ADN-S-25-10-I-P-A
		15 mm		8076358	ADN-S-25-15-I-P-A
		20 mm		8076356	ADN-S-25-20-I-P-A
		25 mm		8076354	ADN-S-25-25-I-P-A
		30 mm		8076352	ADN-S-25-30-I-P-A
		35 mm		8076350	ADN-S-25-35-I-P-A
		40 mm		8076348	ADN-S-25-40-I-P-A
		45 mm		8076346	ADN-S-25-45-I-P-A
		50 mm		8076344	ADN-S-25-50-I-P-A
	32 mm	5 mm		8076363	ADN-S-32-5-I-P-A
		10 mm		8076381	ADN-S-32-10-I-P-A
		15 mm		8076379	ADN-S-32-15-I-P-A
		20 mm		8076377	ADN-S-32-20-I-P-A
		25 mm		8076375	ADN-S-32-25-I-P-A
		30 mm		8076373	ADN-S-32-30-I-P-A
		35 mm		8076371	ADN-S-32-35-I-P-A
		40 mm		8076369	ADN-S-32-40-I-P-A
		45 mm		8076367	ADN-S-32-45-I-P-A
		50 mm		8076365	ADN-S-32-50-I-P-A
	40 mm	5 mm		5138606	ADN-S-40-5-I-P-A
		10 mm		5138607	ADN-S-40-10-I-P-A
		15 mm		5138608	ADN-S-40-15-I-P-A
		20 mm		5138609	ADN-S-40-20-I-P-A
		25 mm		5138610	ADN-S-40-25-I-P-A
		30 mm		5138611	ADN-S-40-30-I-P-A
		35 mm		5138612	ADN-S-40-35-I-P-A
		40 mm		5138613	ADN-S-40-40-I-P-A
		45 mm		5138614	ADN-S-40-45-I-P-A
		50 mm		5138615	ADN-S-40-50-I-P-A

Ordering data

With cushioning – P; with female thread – I; with position sensing – A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	50 mm	5 mm	1 - Low corrosion stress	5138188	ADN-S-50-5-I-P-A
		10 mm		5138189	ADN-S-50-10-I-P-A
		15 mm		5138190	ADN-S-50-15-I-P-A
		20 mm		5138191	ADN-S-50-20-I-P-A
		25 mm		5138192	ADN-S-50-25-I-P-A
		30 mm		5138193	ADN-S-50-30-I-P-A
		35 mm		5138194	ADN-S-50-35-I-P-A
		40 mm		5138195	ADN-S-50-40-I-P-A
		45 mm		5138196	ADN-S-50-45-I-P-A
		50 mm		5138197	ADN-S-50-50-I-P-A
	63 mm	5 mm		5132663	ADN-S-63-5-I-P-A
		10 mm		5132664	ADN-S-63-10-I-P-A
		15 mm		5132665	ADN-S-63-15-I-P-A
		20 mm		5132666	ADN-S-63-20-I-P-A
		25 mm		5132667	ADN-S-63-25-I-P-A
		30 mm		5132668	ADN-S-63-30-I-P-A
		35 mm		5132669	ADN-S-63-35-I-P-A
		40 mm		5132670	ADN-S-63-40-I-P-A
		45 mm		5132671	ADN-S-63-45-I-P-A
		50 mm		5132672	ADN-S-63-50-I-P-A

1) More information www.festo.com/x/topic/kbk

With cushioning – P; with female thread – I; with position sensing – A; for battery production – F1A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	12 mm	5 mm	2 - Moderate corrosion stress	8142562	ADN-S-12-5-I-P-A-F1A
		10 mm		8142563	ADN-S-12-10-I-P-A-F1A
		15 mm		8142564	ADN-S-12-15-I-P-A-F1A
		20 mm		8142565	ADN-S-12-20-I-P-A-F1A
		25 mm		8142566	ADN-S-12-25-I-P-A-F1A
		30 mm		8142567	ADN-S-12-30-I-P-A-F1A
		35 mm		8142568	ADN-S-12-35-I-P-A-F1A
	16 mm	5 mm		8142728	ADN-S-16-5-I-P-A-F1A
		10 mm		8142729	ADN-S-16-10-I-P-A-F1A
		15 mm		8142730	ADN-S-16-15-I-P-A-F1A
		20 mm		8142731	ADN-S-16-20-I-P-A-F1A
		25 mm		8142732	ADN-S-16-25-I-P-A-F1A
		30 mm		8142733	ADN-S-16-30-I-P-A-F1A
		35 mm		8142734	ADN-S-16-35-I-P-A-F1A
	20 mm	5 mm		8142756	ADN-S-20-5-I-P-A-F1A
		10 mm		8142757	ADN-S-20-10-I-P-A-F1A
		15 mm		8142758	ADN-S-20-15-I-P-A-F1A
		20 mm		8142759	ADN-S-20-20-I-P-A-F1A
		25 mm		8142760	ADN-S-20-25-I-P-A-F1A
		30 mm		8142761	ADN-S-20-30-I-P-A-F1A
		35 mm		8142762	ADN-S-20-35-I-P-A-F1A
		40 mm		8142763	ADN-S-20-40-I-P-A-F1A
		45 mm		8142764	ADN-S-20-45-I-P-A-F1A
		50 mm		8142765	ADN-S-20-50-I-P-A-F1A
	25 mm	5 mm		8142806	ADN-S-25-5-I-P-A-F1A
		10 mm		8142807	ADN-S-25-10-I-P-A-F1A
		15 mm		8142808	ADN-S-25-15-I-P-A-F1A
		20 mm		8142809	ADN-S-25-20-I-P-A-F1A
		25 mm		8142810	ADN-S-25-25-I-P-A-F1A

Ordering data

With cushioning – P; with female thread – I; with position sensing – A; for battery production – F1A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	25 mm	30 mm	2 - Moderate corrosion stress	8142811	ADN-S-25-30-I-P-A-F1A
		35 mm		8142812	ADN-S-25-35-I-P-A-F1A
		40 mm		8142813	ADN-S-25-40-I-P-A-F1A
		45 mm		8142814	ADN-S-25-45-I-P-A-F1A
		50 mm		8142815	ADN-S-25-50-I-P-A-F1A
	32 mm	5 mm		8142846	ADN-S-32-5-I-P-A-F1A
		10 mm		8142847	ADN-S-32-10-I-P-A-F1A
		15 mm		8142848	ADN-S-32-15-I-P-A-F1A
		20 mm		8142849	ADN-S-32-20-I-P-A-F1A
		25 mm		8142850	ADN-S-32-25-I-P-A-F1A
		30 mm		8142851	ADN-S-32-30-I-P-A-F1A
		35 mm		8142852	ADN-S-32-35-I-P-A-F1A
		40 mm		8142853	ADN-S-32-40-I-P-A-F1A
		45 mm		8142854	ADN-S-32-45-I-P-A-F1A
		50 mm		8142855	ADN-S-32-50-I-P-A-F1A
	40 mm	5 mm		8142876	ADN-S-40-5-I-P-A-F1A
		10 mm		8142877	ADN-S-40-10-I-P-A-F1A
		15 mm		8142878	ADN-S-40-15-I-P-A-F1A
		20 mm		8142879	ADN-S-40-20-I-P-A-F1A
		25 mm		8142880	ADN-S-40-25-I-P-A-F1A
		30 mm		8142881	ADN-S-40-30-I-P-A-F1A
		35 mm		8142882	ADN-S-40-35-I-P-A-F1A
		40 mm		8142883	ADN-S-40-40-I-P-A-F1A
		45 mm		8142884	ADN-S-40-45-I-P-A-F1A
		50 mm		8142885	ADN-S-40-50-I-P-A-F1A
	50 mm	5 mm		8142897	ADN-S-50-5-I-P-A-F1A
		10 mm		8142898	ADN-S-50-10-I-P-A-F1A
		15 mm		8142899	ADN-S-50-15-I-P-A-F1A
		20 mm		8142900	ADN-S-50-20-I-P-A-F1A
		25 mm		8142901	ADN-S-50-25-I-P-A-F1A
		30 mm		8142902	ADN-S-50-30-I-P-A-F1A
		35 mm		8142903	ADN-S-50-35-I-P-A-F1A
		40 mm		8142904	ADN-S-50-40-I-P-A-F1A
		45 mm		8142905	ADN-S-50-45-I-P-A-F1A
		50 mm		8142906	ADN-S-50-50-I-P-A-F1A
	63 mm	5 mm		8142917	ADN-S-63-5-I-P-A-F1A
		10 mm		8142918	ADN-S-63-10-I-P-A-F1A
		15 mm		8142919	ADN-S-63-15-I-P-A-F1A
		20 mm		8142920	ADN-S-63-20-I-P-A-F1A
		25 mm		8142921	ADN-S-63-25-I-P-A-F1A
		30 mm		8142922	ADN-S-63-30-I-P-A-F1A
		35 mm		8142923	ADN-S-63-35-I-P-A-F1A
		40 mm		8142924	ADN-S-63-40-I-P-A-F1A
		45 mm		8142925	ADN-S-63-45-I-P-A-F1A
		50 mm		8142926	ADN-S-63-50-I-P-A-F1A

1) More information www.festo.com/x/topic/kbk

Ordering data

With cushioning – P; with male thread – A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	12 mm	5 mm	1 - Low corrosion stress	8091419	ADN-S-12-5-A-P
		10 mm		8091428	ADN-S-12-10-A-P
		15 mm		8091416	ADN-S-12-15-A-P
		20 mm		8091420	ADN-S-12-20-A-P
		25 mm		8091426	ADN-S-12-25-A-P
		30 mm		8091423	ADN-S-12-30-A-P
		35 mm		8091418	ADN-S-12-35-A-P
	16 mm	5 mm		8091671	ADN-S-16-5-A-P
		10 mm		8091670	ADN-S-16-10-A-P
		15 mm		8091677	ADN-S-16-15-A-P
		20 mm		8091666	ADN-S-16-20-A-P
		25 mm		8091665	ADN-S-16-25-A-P
		30 mm		8091672	ADN-S-16-30-A-P
		35 mm		8091676	ADN-S-16-35-A-P
	20 mm	5 mm		8091431	ADN-S-20-5-A-P
		10 mm		8091449	ADN-S-20-10-A-P
		15 mm		8091447	ADN-S-20-15-A-P
		20 mm		8091445	ADN-S-20-20-A-P
		25 mm		8091443	ADN-S-20-25-A-P
		30 mm		8091441	ADN-S-20-30-A-P
		35 mm		8091439	ADN-S-20-35-A-P
		40 mm		8091437	ADN-S-20-40-A-P
		45 mm		8091435	ADN-S-20-45-A-P
		50 mm		8091433	ADN-S-20-50-A-P
	25 mm	5 mm		8092103	ADN-S-25-5-A-P
		10 mm		8092102	ADN-S-25-10-A-P
		15 mm		8092107	ADN-S-25-15-A-P
		20 mm		8092091	ADN-S-25-20-A-P
		25 mm		8092092	ADN-S-25-25-A-P
		30 mm		8092099	ADN-S-25-30-A-P
		35 mm		8092097	ADN-S-25-35-A-P
		40 mm		8092094	ADN-S-25-40-A-P
		45 mm		8092106	ADN-S-25-45-A-P
		50 mm		8092105	ADN-S-25-50-A-P
	32 mm	5 mm		8091452	ADN-S-32-5-A-P
		10 mm		8091461	ADN-S-32-10-A-P
		15 mm		8091460	ADN-S-32-15-A-P
		20 mm		8091453	ADN-S-32-20-A-P
		25 mm		8091467	ADN-S-32-25-A-P
		30 mm		8091465	ADN-S-32-30-A-P
		35 mm		8091456	ADN-S-32-35-A-P
		40 mm		8091450	ADN-S-32-40-A-P
		45 mm		8091451	ADN-S-32-45-A-P
		50 mm		8091462	ADN-S-32-50-A-P
	40 mm	5 mm		8092060	ADN-S-40-5-A-P
		10 mm		8092069	ADN-S-40-10-A-P
		15 mm		8092066	ADN-S-40-15-A-P
		20 mm		8092068	ADN-S-40-20-A-P
		25 mm		8092062	ADN-S-40-25-A-P
		30 mm		8092057	ADN-S-40-30-A-P
		35 mm		8092052	ADN-S-40-35-A-P
		40 mm		8092055	ADN-S-40-40-A-P
		45 mm		8092058	ADN-S-40-45-A-P
		50 mm		8092063	ADN-S-40-50-A-P
	50 mm	5 mm		8092088	ADN-S-50-5-A-P

Ordering data

With cushioning – P; with male thread – A

	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	50 mm	10 mm	1 - Low corrosion stress	8092082	ADN-S-50-10-A-P
		15 mm		8092083	ADN-S-50-15-A-P
		20 mm		8092078	ADN-S-50-20-A-P
		25 mm		8092070	ADN-S-50-25-A-P
		30 mm		8092084	ADN-S-50-30-A-P
		35 mm		8092077	ADN-S-50-35-A-P
		40 mm		8092080	ADN-S-50-40-A-P
		45 mm		8092072	ADN-S-50-45-A-P
		50 mm		8092089	ADN-S-50-50-A-P
	63 mm	5 mm		8092136	ADN-S-63-5-A-P
		10 mm		8092126	ADN-S-63-10-A-P
		15 mm		8092131	ADN-S-63-15-A-P
		20 mm		8092132	ADN-S-63-20-A-P
		25 mm		8092123	ADN-S-63-25-A-P
		30 mm		8092124	ADN-S-63-30-A-P
		35 mm		8092122	ADN-S-63-35-A-P
		40 mm		8092129	ADN-S-63-40-A-P
		45 mm		8092137	ADN-S-63-45-A-P
		50 mm		8092127	ADN-S-63-50-A-P

1) More information www.festo.com/x/topic/kbk

With cushioning – P; with male thread – A; with position sensing – A

	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	12 mm	5 mm	1 - Low corrosion stress	8091427	ADN-S-12-5-A-P-A
		10 mm		8091424	ADN-S-12-10-A-P-A
		15 mm		8091422	ADN-S-12-15-A-P-A
		20 mm		8091429	ADN-S-12-20-A-P-A
		25 mm		8091421	ADN-S-12-25-A-P-A
		30 mm		8091417	ADN-S-12-30-A-P-A
		35 mm		8091425	ADN-S-12-35-A-P-A
	16 mm	5 mm		8091668	ADN-S-16-5-A-P-A
		10 mm		8091678	ADN-S-16-10-A-P-A
		15 mm		8091667	ADN-S-16-15-A-P-A
		20 mm		8091674	ADN-S-16-20-A-P-A
		25 mm		8091675	ADN-S-16-25-A-P-A
		30 mm		8091669	ADN-S-16-30-A-P-A
		35 mm		8091673	ADN-S-16-35-A-P-A
	20 mm	5 mm		8091430	ADN-S-20-5-A-P-A
		10 mm		8091448	ADN-S-20-10-A-P-A
		15 mm		8091446	ADN-S-20-15-A-P-A
		20 mm		8091444	ADN-S-20-20-A-P-A
		25 mm		8091442	ADN-S-20-25-A-P-A
		30 mm		8091440	ADN-S-20-30-A-P-A
		35 mm		8091438	ADN-S-20-35-A-P-A
		40 mm		8091436	ADN-S-20-40-A-P-A
		45 mm		8091434	ADN-S-20-45-A-P-A
		50 mm		8091432	ADN-S-20-50-A-P-A
	25 mm	5 mm		8092104	ADN-S-25-5-A-P-A
		10 mm		8092093	ADN-S-25-10-A-P-A
		15 mm		8092096	ADN-S-25-15-A-P-A
		20 mm		8092109	ADN-S-25-20-A-P-A
		25 mm		8092100	ADN-S-25-25-A-P-A
		30 mm		8092098	ADN-S-25-30-A-P-A

Ordering data

With cushioning – P; with male thread – A; with position sensing – A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	25 mm	35 mm	1 - Low corrosion stress	8092108	ADN-S-25-35-A-P-A
		40 mm		8092095	ADN-S-25-40-A-P-A
		45 mm		8092110	ADN-S-25-45-A-P-A
		50 mm		8092101	ADN-S-25-50-A-P-A
	32 mm	5 mm		8091464	ADN-S-32-5-A-P-A
		10 mm		8091457	ADN-S-32-10-A-P-A
		15 mm		8091469	ADN-S-32-15-A-P-A
		20 mm		8091468	ADN-S-32-20-A-P-A
		25 mm		8091459	ADN-S-32-25-A-P-A
		30 mm		8091454	ADN-S-32-30-A-P-A
		35 mm		8091463	ADN-S-32-35-A-P-A
		40 mm		8091455	ADN-S-32-40-A-P-A
		45 mm		8091466	ADN-S-32-45-A-P-A
		50 mm		8091458	ADN-S-32-50-A-P-A
	40 mm	5 mm		8092050	ADN-S-40-5-A-P-A
		10 mm		8092067	ADN-S-40-10-A-P-A
		15 mm		8092053	ADN-S-40-15-A-P-A
		20 mm		8092064	ADN-S-40-20-A-P-A
		25 mm		8092056	ADN-S-40-25-A-P-A
		30 mm		8092061	ADN-S-40-30-A-P-A
		35 mm		8092051	ADN-S-40-35-A-P-A
		40 mm		8092059	ADN-S-40-40-A-P-A
		45 mm		8092065	ADN-S-40-45-A-P-A
		50 mm		8092054	ADN-S-40-50-A-P-A
	50 mm	5 mm		8092081	ADN-S-50-5-A-P-A
		10 mm		8092073	ADN-S-50-10-A-P-A
		15 mm		8092085	ADN-S-50-15-A-P-A
		20 mm		8092076	ADN-S-50-20-A-P-A
		25 mm		8092075	ADN-S-50-25-A-P-A
		30 mm		8092074	ADN-S-50-30-A-P-A
		35 mm		8092071	ADN-S-50-35-A-P-A
		40 mm		8092087	ADN-S-50-40-A-P-A
		45 mm		8092079	ADN-S-50-45-A-P-A
		50 mm		8092086	ADN-S-50-50-A-P-A
	63 mm	5 mm		8092130	ADN-S-63-5-A-P-A
		10 mm		8092128	ADN-S-63-10-A-P-A
		15 mm		8092135	ADN-S-63-15-A-P-A
		20 mm		8092120	ADN-S-63-20-A-P-A
		25 mm		8092121	ADN-S-63-25-A-P-A
		30 mm		8092125	ADN-S-63-30-A-P-A
		35 mm		8092133	ADN-S-63-35-A-P-A
		40 mm		8092134	ADN-S-63-40-A-P-A
		45 mm		8092138	ADN-S-63-45-A-P-A
		50 mm		8092119	ADN-S-63-50-A-P-A

¹⁾ More information www.festo.com/x/topic/kbk

With cushioning – P; with male thread – A; with position sensing – A; for battery production – F1A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	12 mm	5 mm	2 - Moderate corrosion stress	8142576	ADN-S-12-5-A-P-A-F1A

Ordering data

With cushioning – P; with male thread – A; with position sensing – A; for battery production – F1A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	12 mm	10 mm	2 - Moderate corrosion stress	8142577	ADN-S-12-10-A-P-A-F1A
		15 mm		8142578	ADN-S-12-15-A-P-A-F1A
		20 mm		8142579	ADN-S-12-20-A-P-A-F1A
		25 mm		8142580	ADN-S-12-25-A-P-A-F1A
		30 mm		8142581	ADN-S-12-30-A-P-A-F1A
		35 mm		8142582	ADN-S-12-35-A-P-A-F1A
	16 mm	5 mm		8142735	ADN-S-16-5-A-P-A-F1A
		10 mm		8142736	ADN-S-16-10-A-P-A-F1A
		15 mm		8142737	ADN-S-16-15-A-P-A-F1A
		20 mm		8142738	ADN-S-16-20-A-P-A-F1A
		25 mm		8142739	ADN-S-16-25-A-P-A-F1A
		30 mm		8142740	ADN-S-16-30-A-P-A-F1A
		35 mm		8142741	ADN-S-16-35-A-P-A-F1A
	20 mm	5 mm		8142766	ADN-S-20-5-A-P-A-F1A
		10 mm		8142767	ADN-S-20-10-A-P-A-F1A
		15 mm		8142768	ADN-S-20-15-A-P-A-F1A
		20 mm		8142769	ADN-S-20-20-A-P-A-F1A
		25 mm		8142770	ADN-S-20-25-A-P-A-F1A
		30 mm		8142771	ADN-S-20-30-A-P-A-F1A
		35 mm		8142772	ADN-S-20-35-A-P-A-F1A
		40 mm		8142773	ADN-S-20-40-A-P-A-F1A
		45 mm		8142774	ADN-S-20-45-A-P-A-F1A
		50 mm		8142775	ADN-S-20-50-A-P-A-F1A
	25 mm	5 mm		8142826	ADN-S-25-5-A-P-A-F1A
		10 mm		8142827	ADN-S-25-10-A-P-A-F1A
		15 mm		8142828	ADN-S-25-15-A-P-A-F1A
		20 mm		8142829	ADN-S-25-20-A-P-A-F1A
		25 mm		8142830	ADN-S-25-25-A-P-A-F1A
		30 mm		8142831	ADN-S-25-30-A-P-A-F1A
		35 mm		8142832	ADN-S-25-35-A-P-A-F1A
		40 mm		8142833	ADN-S-25-40-A-P-A-F1A
		45 mm		8142834	ADN-S-25-45-A-P-A-F1A
		50 mm		8142835	ADN-S-25-50-A-P-A-F1A
	32 mm	5 mm	0 - No corrosion stress	8142866	ADN-S-32-5-A-P-A-F1A
		10 mm		8142867	ADN-S-32-10-A-P-A-F1A
		15 mm		8142868	ADN-S-32-15-A-P-A-F1A
		20 mm		8142869	ADN-S-32-20-A-P-A-F1A
		25 mm		8142870	ADN-S-32-25-A-P-A-F1A
		30 mm		8142871	ADN-S-32-30-A-P-A-F1A
		35 mm		8142872	ADN-S-32-35-A-P-A-F1A
		40 mm		8142873	ADN-S-32-40-A-P-A-F1A
		45 mm		8142874	ADN-S-32-45-A-P-A-F1A
		50 mm		8142875	ADN-S-32-50-A-P-A-F1A
	40 mm	5 mm		8142886	ADN-S-40-5-A-P-A-F1A
		10 mm		8142887	ADN-S-40-10-A-P-A-F1A
		15 mm		8142888	ADN-S-40-15-A-P-A-F1A
		20 mm		8142889	ADN-S-40-20-A-P-A-F1A
		25 mm		8142890	ADN-S-40-25-A-P-A-F1A
		30 mm		8142891	ADN-S-40-30-A-P-A-F1A
		35 mm		8142892	ADN-S-40-35-A-P-A-F1A
		40 mm		8142893	ADN-S-40-40-A-P-A-F1A
		45 mm		8142894	ADN-S-40-45-A-P-A-F1A
		50 mm		8142895	ADN-S-40-50-A-P-A-F1A
	50 mm	5 mm		8142907	ADN-S-50-5-A-P-A-F1A
		10 mm		8142908	ADN-S-50-10-A-P-A-F1A

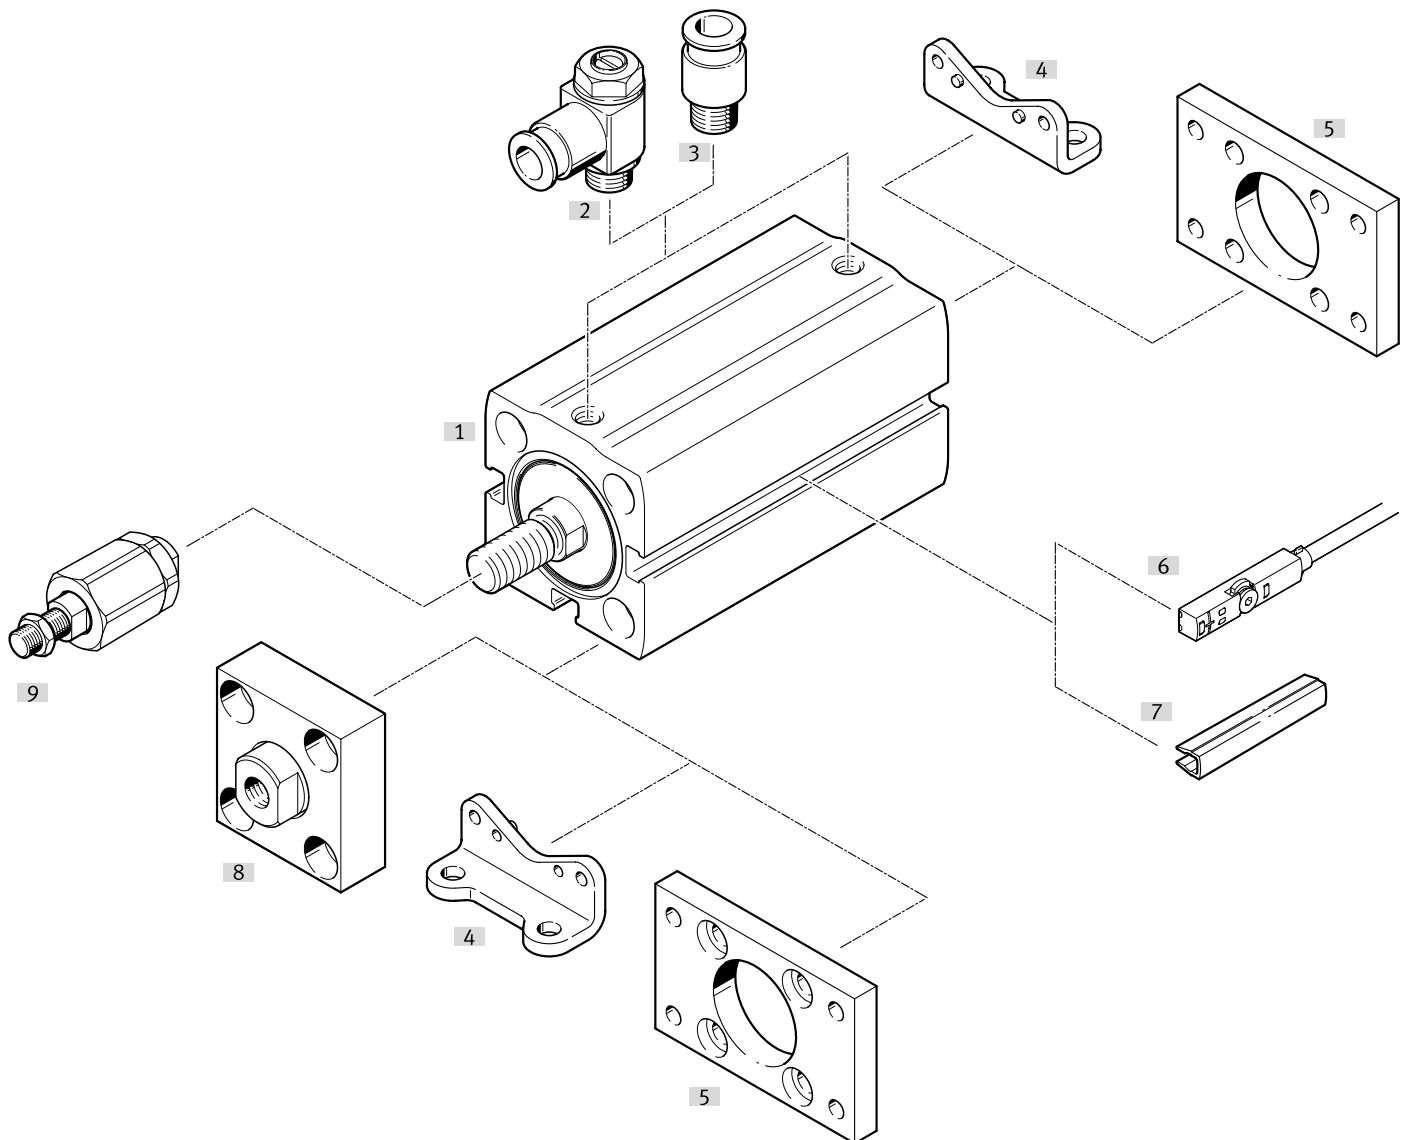
Ordering data

With cushioning – P; with male thread – A; with position sensing – A; for battery production – F1A					
	Piston diameter	Stroke	Corrosion resistance class CRC ¹⁾	Part no.	Type
	50 mm	15 mm	0 - No corrosion stress	8142909	ADN-S-50-15-A-P-A-F1A
		20 mm		8142910	ADN-S-50-20-A-P-A-F1A
		25 mm		8142911	ADN-S-50-25-A-P-A-F1A
		30 mm		8142912	ADN-S-50-30-A-P-A-F1A
		35 mm		8142913	ADN-S-50-35-A-P-A-F1A
		40 mm		8142914	ADN-S-50-40-A-P-A-F1A
		45 mm		8142915	ADN-S-50-45-A-P-A-F1A
		50 mm		8142916	ADN-S-50-50-A-P-A-F1A
	63 mm	5 mm		8142927	ADN-S-63-5-A-P-A-F1A
		10 mm		8142928	ADN-S-63-10-A-P-A-F1A
		15 mm		8142929	ADN-S-63-15-A-P-A-F1A
		20 mm		8142930	ADN-S-63-20-A-P-A-F1A
		25 mm		8142931	ADN-S-63-25-A-P-A-F1A
		30 mm		8142932	ADN-S-63-30-A-P-A-F1A
		35 mm		8142933	ADN-S-63-35-A-P-A-F1A
		40 mm		8142934	ADN-S-63-40-A-P-A-F1A
		45 mm		8142935	ADN-S-63-45-A-P-A-F1A
		50 mm		8142936	ADN-S-63-50-A-P-A-F1A

1) More information www.festo.com/x/topic/mbk

Peripherals


Peripherals overview



Accessories			→ Link
Type/order code	Description		
[1] Compact cylinder ADN-S	Double-acting		↗ adn-s
[2] One-way flow control valve GRLA	For Ø 12 ... 63: for regulating speed		31
[2] One-way flow control valve GRLZ	For Ø 12 ... 63: for regulating speed		31
[3] Push-in fitting QS	For Ø 12 ... 63: For connecting tubing with standard O.D.		↗ qs
[4] Foot mounting HNA	For Ø 12 ... 63: for bearing or end caps		30
[5] Flange mounting FNC	For Ø 12 ... 63: for bearing or end caps		31
[6] Proximity switch SMT-10	For Ø 6 ... 10: can be integrated in the cylinder profile barrel		32
[6] Proximity switch SMT-8	For Ø 12 ... 63: can be integrated in the cylinder profile barrel		32
[6] Position transmitter SDAS-MHS	For Ø 12 ... 63: can be integrated in the cylinder profile barrel		32
[6] Position transmitter SDAT-MHS	For Ø 12 ... 63: can be integrated in the cylinder profile barrel		33
[6] Position transmitter SMAT-8	For Ø 12 ... 63: can be integrated in the cylinder profile barrel		33
[7] Slot cover ABP	For Ø 12 ... 63: to protect the sensor cables and the sensor slots from contamination		33
[8] Coupling piece KSG	For Ø 32 ... 63: to compensate for radial deviations		30
[8] Coupling piece KSZ	For Ø 32 ... 63: to compensate for radial deviations		30
[9] Self-aligning rod coupler FK/DARP	For Ø 12 ... 63: To compensate for radial and angular deviations		30


Accessories

Self-aligning rod coupler FK

	Description	Material housing	Suitability for the production of Li-ion batteries ¹⁾	Product weight	Part no.	Type
	For Ø 12	Galvanised steel	F1	23 g	30984	FK-M5
	For Ø 16			24 g	2061	FK-M6
	For Ø 20, 25			56 g	2062	FK-M8
	For Ø 32, 40			236 g	6140	FK-M10X1,25
	For Ø 50, 63			245 g	6141	FK-M12X1,25


1) More information www.festo.com/x/topic/bat

Self-aligning rod coupler DARF

	Description	Material housing	Suitability for the production of Li-ion batteries ¹⁾	Product weight	Part no.	Type
	For Ø 12	High-alloy stainless steel	F5a	24 g	8170112	DARF-M5-F
	For Ø 16			25 g	8170115	DARF-M6-F
	For Ø 20, 25			58 g	8170116	DARF-M8-F
	For Ø 32, 40			236 g	8170119	DARF-M10P-F
	For Ø 50, 63			244 g	8170120	DARF-M12P-F


1) More information www.festo.com/x/topic/bat

Coupling piece KSG

	Description	Material mounting	Suitability for the production of Li-ion batteries ¹⁾	Product weight	Part no.	Type
	For Ø 32, 40	Steel, Galvanised	F1	229 g	32963	KSG-M10X1,25
	For Ø 50, 63			447 g	32964	KSG-M12X1,25


1) More information www.festo.com/x/topic/bat

Coupling piece KSZ

	Description	Material mounting	Suitability for the production of Li-ion batteries ¹⁾	Product weight	Part no.	Type
	For Ø 32, 40	Steel, Galvanised	F1	110 g	36125	KSZ-M10X1,25
	For Ø 50, 63			180 g	36126	KSZ-M12X1,25


1) More information www.festo.com/x/topic/bat

Foot mounting HNA

	Description	Material bracket	Suitability for the production of Li-ion batteries ¹⁾	Product weight	Part no.	Type
	For Ø 12	Steel, Galvanised	F1	39 g	537237	HNA-12
	For Ø 16			42 g	537238	HNA-16
	For Ø 20			84 g	537239	HNA-20
	For Ø 25			90 g	537240	HNA-25
	For Ø 32			123 g	537241	HNA-32
	For Ø 40			157 g	537242	HNA-40
	For Ø 50			278 g	537243	HNA-50


Accessories

Foot mounting HNA

	Description	Material bracket	Suitability for the production of Li-ion batteries ¹⁾	Product weight	Part no.	Type
	For Ø 63	Steel, Galvanised	F1	328 g	537244	HNA-63

1) More information www.festo.com/x/topic/bat

Flange mounting FNC

	Description	Material mounting	Product weight	Part no.	Type
	For Ø 12	Steel, Galvanised	79 g	537245	FNC-12
	For Ø 16		88 g	537246	FNC-16
	For Ø 20		141 g	537247	FNC-20
	For Ø 25		165 g	537248	FNC-25
	For Ø 32		221 g	174376	FNC-32
	For Ø 40		291 g	174377	FNC-40
	For Ø 50		536 g	174378	FNC-50
	For Ø 63		679 g	174379	FNC-63

One-way flow control valves GRLA – for exhaust air

	Description	Pneumatic connection 1	Pneumatic connection, port 2	Part no.	Type
	For Ø 6, 10	Push-in connector 3 mm	M3	175041	GRLA-M3-QS-3
	For Ø 12, 16, 20, 25, 32, 40		M5	193137	GRLA-M5-QS-3-D
				193138	GRLA-M5-QS-4-D
				193139	GRLA-M5-QS-6-D
	For Ø 50, 63	Push-in connector 3 mm	G1/8	193142	GRLA-1/8-QS-3-D
		Push-in connector 4 mm		193143	GRLA-1/8-QS-4-D
		Push-in connector 6 mm		193144	GRLA-1/8-QS-6-D
		Push-in connector 8 mm		193145	GRLA-1/8-QS-8-D


One-way flow control valves GRLZ – for supply air

	Description	Pneumatic connection 1	Pneumatic connection, port 2	Part no.	Type
	For Ø 6, 10	Push-in connector 3 mm	M3	175043	GRLZ-M3-QS-3
	For Ø 12, 16, 20, 25, 32, 40		M5	193153	GRLZ-M5-QS-3-D
				193154	GRLZ-M5-QS-4-D
				193155	GRLZ-M5-QS-6-D
	For Ø 50, 63	Push-in connector 3 mm	G1/8	193156	GRLZ-1/8-QS-3-D
		Push-in connector 4 mm		193157	GRLZ-1/8-QS-4-D
		Push-in connector 6 mm		193158	GRLZ-1/8-QS-6-D
		Push-in connector 8 mm		193159	GRLZ-1/8-QS-8-D

Accessories


Proximity switch SMT-10 for round slot, magneto-resistive – for ADN-S-6 ... 10

Link [smt](#)


	Type of mounting	Switching output	Electrical connection	Cable length	Part no.	Type
	Screw-clamped, Insertable in the slot from above	3-wire NPN N/O contact	Open end	2.5 m	551377	SMT-10M-NS-24V-E-2,5-L-OE
			Plug M8, A-coded	0.3 m	551379	SMT-10M-NS-24V-E-0,3-L-M8D
		3-wire PNP N/O contact	Open end	2.5 m	551373	SMT-10M-PS-24V-E-2,5-L-OE
			Plug M8, A-coded	0.3 m	551375	SMT-10M-PS-24V-E-0,3-L-M8D

Proximity switch SMT-8 for T-slot, magneto-resistive – for ADN-S-12 ... 63


Link [smt](#)

	Type of mounting	Switching output	Electrical connection	Cable length	Part no.	Type
	Screw-clamped, Insertable in the slot from above	3-wire NPN N/O contact	Open end	2.5 m	574338	SMT-8M-A-NS-24V-E-2,5-OE
			Plug M8, A-coded	0.3 m	574339	SMT-8M-A-NS-24V-E-0,3-M8D
		3-wire PNP N/C contact	Open end	7.5 m	574340	SMT-8M-A-PO-24V-E-7,5-OE
				2.5 m	574335	SMT-8M-A-PS-24V-E-2,5-OE
		3-wire PNP N/O contact	Plug M8, A-coded	0.3 m	574334	SMT-8M-A-PS-24V-E-0,3-M8D

Connecting cables NEBA, straight


	Electrical connection 1, connector system	Electrical connection 2, connector system	Electrical connection 2, number of connections/cores	Cable length	Part no.	Type
	M8x1, A-coded, to EN 61076-2-104	Open end	3	2.5 m	8078223	NEBA-M8G3-U-2.5-N-LE3
				5 m	8078224	NEBA-M8G3-U-5-N-LE3

Connecting cables NEBA, angled

	Electrical connection 1, connector system	Electrical connection 2, connector system	Electrical connection 2, number of connections/cores	Cable length	Part no.	Type
	M8x1, A-coded, to EN 61076-2-104	Open end	3	2.5 m	8078230	NEBA-M8W3-U-2.5-N-LE3
				5 m	8078231	NEBA-M8W3-U-5-N-LE3

Position transmitter SDAS for T-slot, plug M8, A-coded – for size ADN-S-12 ... 63


Link [sdas](#)

	Description	Sensing range	Electrical connection 1, number of connections/cores	Cable length	Part no.	Type
	Operating modes: two adjustable switching outputs; IO-Link®	52 mm	4	0.3 m	8063974	SDAS-MHS-M40-1L-PNLK-PN-E-0.3-M8
				2.5 m	8063975	SDAS-MHS-M40-1L-PNLK-PN-E-2.5-LE

Accessories


Position transmitter SDAT for T-slot, plug M8, A-coded – for ADN-S-12 ... 63

Link [sdatt](#)


	Sensing range	Analogue output	Electrical connection 1, number of connections/cores	Cable length	Part no.	Type
	0 ... 50.000 mm	4 - 20 mA	4	0.3 m	1531265	SDAT-MHS-M50-1L-SA-E-0.3-M8

Position transmitter SMAT for T-slot, M8 plug, A-coded – for size ADN-S-12 ... 63


Link [smatt](#)

	Sensing range	Analogue output	Electrical connection 1, number of connections/cores	Cable length	Part no.	Type
	52 mm	0 - 10 V	4	0.3 m	553744	SMAT-8M-U-E-0,3-M8D


Connecting cables NEBA, straight

	Electrical connection 1, connector system	Electrical connection 2, connector system	Electrical connection 2, number of connections/cores	Cable length	Part no.	Type
	M8x1, A-coded, to EN 61076-2-104	Open end	4	2.5 m	8078227	NEBA-M8G4-U-2.5-N-LE4
				5 m	8078228	NEBA-M8G4-U-5-N-LE4

Connecting cables NEBA, angled

	Electrical connection 1, connector system	Electrical connection 2, connector system	Electrical connection 2, number of connections/cores	Cable length	Part no.	Type
	M8x1, A-coded, to EN 61076-2-104	Open end	4	2.5 m	8078233	NEBA-M8W4-U-2.5-N-LE4
				5 m	8078234	NEBA-M8W4-U-5-N-LE4

Slot cover ABP for T-slot – for ADN-S-12 ... 63

	Description	Material housing	Packaging quantity [pieces]	Part no.	Type
	Length 0.5 m, Inserted from above	ABS	2	151680	ABP-5-S