


Ball screw axes ELGD-BS

FESTO

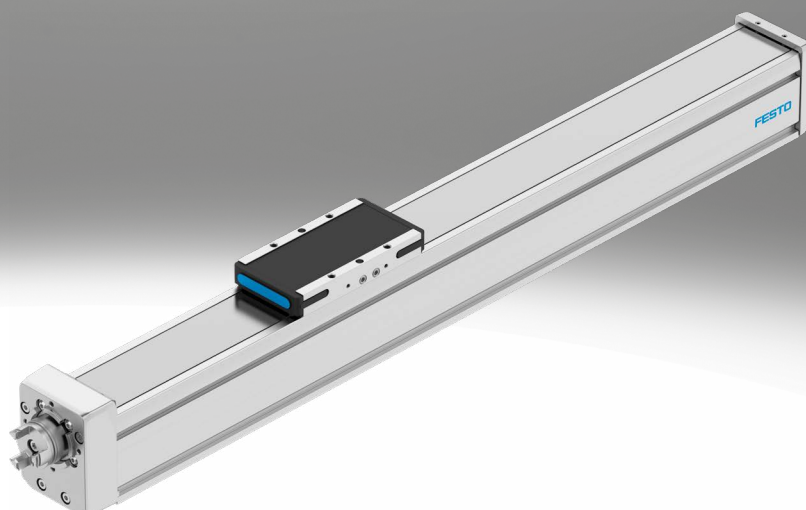

Key features

At a glance

ELGD-BS (standard design)

- Profile with a square cross section and sturdy drive elements for high feed forces
- With NSF-H1 lubricant for the food zone
- Suitable for the production of Li-ion batteries

ELGD-BS-WD (wide design)

- Reduced profile height offers smaller installation dimensions for handling systems and applications that do not require such high feed forces
- 30% lighter, while rigidity and guide load capacity are still similar to the axis in the standard design
- With NSF-H1 lubricant for the food zone
- Suitable for the production of Li-ion batteries

Innovative guide technology

- Excellent rigidity and load capacity of the guide for greater load in the same installation space
- Less vibration and smoother slide movement protect sensitive workpieces
- High speeds ensure short cycle times and a very long service life minimises downtime

Powerful drive elements

- High feed forces and acceleration for shorter process times
- Long service life and increased reliability reduce TCO

Innovative stainless steel cover strip solution

- Abrasion-free and clean surface protects workpieces from particles
- Minimised number of particles for use in cleanrooms
- Reduced ingress of dirt for use in harsh ambient conditions


Options:

- Extended or additional slide for higher axial and lateral torques and higher loads

Sealing air connection:

- Air is exchanged between the interior of the cylinder and the environment via the sealing air connection. This prevents negative pressure or excess pressure from building up inside the cylinder.
- Application of slight negative pressure prevents the emission of particles
- Application of slight excess pressure prevents the ingress of particles

Guide axis ELFD

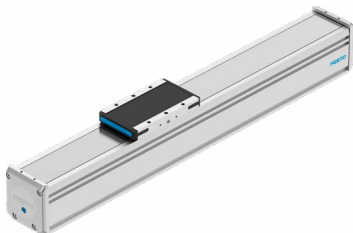

- Driveless linear guide units with guide and freely movable slide
- The guide axis is designed to support forces and torques in multi-axis applications

Key features

Engineering tools

More information → [electric-motion-sizing](#)



Save time with smart engineering tools for the optimal solution. Our goal is to increase your productivity. Our engineering tools play an integral part in achieving this goal. They help you size your system correctly, tap into unimagined productivity reserves and generate additional productivity along the entire value chain. In every phase of your project, from the initial contact to the modernisation of your machine, you will come across a number of different tools and useful tools.

Electric Motion Sizing

- Create the optimum drive package quickly and reliably. Electric Motion Sizing calculates suitable combinations of electric axis, electric motor and servo drive using just a few application details. It provides you with all the relevant data including the bill of materials and documentation for the selected combination. This avoids design errors and results in significantly improved energy efficiency for the system. A smooth connection to the Festo Automation Suite also makes commissioning easier for you.


Graphs

More information → [elgd-bs](#)



The graphs shown in this document are also available online. These can be used to display precise values.

Orientation guide

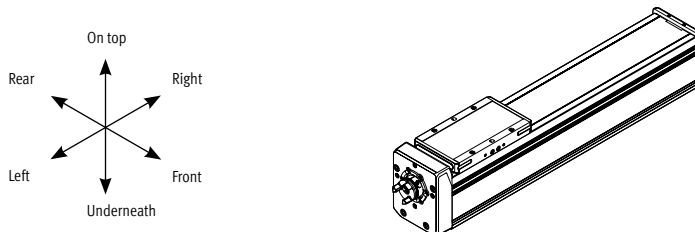

- The side on which the labelling is applied is defined as the front.

Drive system

[BS] Ball screw

- For applications requiring precision
- High reliability and long service life
- For high loads

Stroke reserve

[...H] 0 ... 999 mm

- The stroke reserve is a safety distance from the mechanical end position and is not used in normal operation.
- The sum of the stroke length and 2x stroke reserve must not exceed the maximum working stroke.

Screw pitch

- The screw pitch describes the distance travelled by the ball screw nut per revolution of the ball screw in millimetres.
- Thanks to the different screw pitches, it is possible to choose the smallest possible motor for the required speed and feed force.



Ball screw support

[SU] With ball screw support


The ball screw support enables maximum travel speed with all stroke lengths.

Key features


Slide design	
[]	Standard
[L]	Long



Additional slide	
[ZR]	Right
[ZL]	Left



- The additional slide is always a standard slide



Lubrication	
[]	Standard
[GN]	Lubrication nipple

- | | |
|--|--|
| <ul style="list-style-type: none">• With lifetime lubrication (this applies under standard conditions. Please refer to the operating manual for maintenance intervals for specific applications)• Lubrication nipple not included in delivery | <ul style="list-style-type: none">• The lubrication adapters enable the guide to be permanently lubricated using semi- or fully automatic relubrication devices• The adapters are suitable for oils and greases |
|--|--|

Type of mounting	
[M]	Direct mounting
[M7]	Type of mounting for front end use

- | | |
|--|--|
| <ul style="list-style-type: none">• When direct mounting is selected, the axis is supplied with threads in the underside of the profile. It can then be mounted without profile mountings, which saves space• Additional centring holes make it easy to install the axis in the machine | <ul style="list-style-type: none">• Attachments can be fitted on the front of the axis using the front-end mounting feature• Threads are therefore integrated into the underside of the profile on the side facing away from the motor; this, together with an angle kit, makes for stable front-end assembly |
|--|--|

Measurement system	
[M3]	With displacement encoder

The position of the slide can be sensed directly when using the incremental displacement encoder. This means that all elasticities of the drivetrain can be detected and corrected by the motor controller

Type codes

001	Series	
ELGD	Gantry axis	
002	Drive system	
BS	Ball screw drive	
003	Guide	
KF	Recirculating ball bearing guide	
004	Size	
60	60	
80	80	
120	120	
005	Stroke [mm]	
100	100	
200	200	
300	300	
400	400	
500	500	
600	600	
800	800	
1000	1000	
...	50 ... 2500	
006	Stroke reserve	
0H	None	
...H	0 ... 999 mm	
007	Ball screw pitch	
5P	5 mm	
10P	10 mm	
20P	20 mm	
30P	30 mm	

008	Ball screw support	
	None	
SU	With	
009	Slide design	
	Standard	
L	Slide, long	
010	Additional slide	
	None	
ZL	1 slide left	
ZR	1 slide right	
011	Lubrication	
	Standard	
GN	Lubrication nipple	
012	Type of mounting	
	Profile slots with clamping jaws	
M	Direct mounting	
M7	Mounting type for front end use	
013	Displacement encoder	
	None	
M3	With displacement encoder, incremental, resolution 2.5 µm, 10... 30 V	
014	Displacement encoder attachment position	
	None	
B	Rear	
F	Front	

Datasheet

General technical data									
Size		60		80			120		
Screw pitch	[mm/rev]	5	10	5	10	20	5	10	30
Design		Electromechanical axis with ball screw							
Guide		Recirculating ball bearing guide							
Mounting position		Any							
Working stroke									
ELGD-...	[mm]	50 ... 1000		50 ... 2000			50 ... 2500		
ELGD-...-M	[mm]	50 ... 1000		50 ... 1400			50 ... 1400		
ELGD-...-L-M	[mm]	50 ... 1000		50 ... 1400			50 ... 1370		
Max. feed force F _x									
With axial kit	[N]	1550	1550	2650	2650	2650	3520	3520	3520
With parallel kit	[N]	1550	1550	2650	1771	873	2520	2520	2520
At low travel speed									
	[m/s]	0.05	0.05	0.05	0.05	0.1	0.05	0.05	0.1
No-load torque	[Nm]	0.068	0.071	0.098	0.098	0.113	0.25	0.381	0.33
No-load torque with ball screw support	[Nm]	0.089	0.092	0.127	0.127	0.147	0.419	0.332	0.495
At maximum travel speed									
	[m/s]	0.25	0.5	0.25	0.5	1	0.25	0.5	1.5
No-load torque	[Nm]	0.161	0.21	0.285	0.269	0.327	0.516	1.436	1.103
No-load torque with ball screw support	[Nm]	0.209	0.27	0.37	0.35	0.425	0.957	1.071	1.805
Max. radial force ¹⁾	[N]	230	230	500	500	500	750	750	750
Max. rotational speed ²⁾	[rpm]	6667	6667	5000	5000	5000	3200	3200	3200
Max. speed	[m/s]	0.56	1.11	0.42	0.83	1.67	0.27	0.53	1.6
Max. acceleration	[m/s ²]	15							
Repetition accuracy	[mm]	±0.01							
Reversing backlash	[mm]	0.15							
Position sensing		Via proximity switch							

1) At the drive shaft

2) Rotational speed and velocity are stroke-dependent

Weight [g]						
Size		60		80		120
Slide design			L		L	
Basic weight with 0 mm stroke ¹⁾		1774	2286	3147	4533	6087
Additional weight per 10 mm stroke		54	54	90	90	147
Moving mass		555	810	990	1671	1814

1) Including slide

Ball screw			
Size		60	80
Diameter	[mm]	12	16
Pitch	[mm/rev]	5/10	5/10/20

Homing

Homing can be carried out in two ways:

- Against a fixed stop
- Using a reference switch

The following values must be observed:

Size		60	80	120
Max. impact energy	[mJ]	1	2	1
Note on the impact energy in the end positions	[m/s]	At maximum homing speed of 0.01 m/s		

Datasheet

Operating and environmental conditions

Ambient temperature ¹⁾	[°C]	0 ... +60
Degree of protection		IP40
Duty cycle	[%]	100
Maintenance interval ²⁾		Lifetime lubrication

1) Note operating range of proximity switches

2) This information applies under standard conditions. Please refer to the operating manual for maintenance intervals for specific applications.

Cleanroom suitability

The axis ELGD is designed for cleanroom applications and tested under typical operating conditions. The ISO class is determined using standardised testing procedures in which particle emissions are measured for several hours until stable values are reached. The classification of the cleanroom class is carried out according to ISO 14644 14 using reliable statistical methods. The tests are carried out with 100% duty cycle. The ISO class is determined over a period of 100 minutes in order to obtain reliable performance data.

The standard grease used in the ELGD has a low particle emission and is therefore well suited for cleanroom applications.

Our engineering team can carry out a detailed assessment for applications with specific cleanroom requirements and recommend an optimal configuration that is tailored to your process.

Size	60	80	120
Suitable for cleanrooms, measured according to ISO 14644-14	ISO class 4 (vacuum) ISO class 7		

1) In order to achieve the required ISO class, the axis must be cleaned and correctly prepared before commissioning.

ISO class			4			5				6				7			
Speed			[m/s]			0.1	0.2	0.5	1	0.1	0.2	0.5	1	0.1	0.2	0.5	1
	For size																
Required vacuum flow rate	60	[l/min]	10	20	50	10	20	50	*	0	10	30	*	0	0	10	*
	80	[l/min]	10	10	30	10	10	30	80	0	0	10	50	0	0	0	30
	120	[l/min]	10	*	**	0	*	50	*	0	*	20	*	0	*	0	*

* Not measured

** Not reached

Mass moment of inertia

Size	60				
Screw pitch	[mm/rev]	5		10	
Slide design		L			L
J_0	[kg mm ²]	6.350	6.995	6.350	6.995
J_H per metre stroke	[kg mm ² /m]	15.716	15.716	15.716	15.716
J_L per kg effective load	[kg mm ² /kg]	0.633	0.633	2.533	2.533

Mass moment of inertia

Size	80						
Screw pitch	[mm/rev]	5		10		20	
Slide design			L		L		L
J ₀	[kg mm ²]	10.619	13.662	10.619	13.662	10.619	13.662
J _H per metre stroke	[kg mm ² /m]	39.016	39.016	39.016	39.016	39.016	39.016
J _L per kg effective load	[kg mm ² /kg]	0.633	0.633	2.533	2.533	10.1	10.1

Datasheet

Mass moment of inertia							
Size		120					
Screw pitch	[mm/rev]	5		10		30	
Slide design			L		L		L
J_0	[kg mm ²]	76.031	102.36	76.031	102.36	76.188	103.38
J_H per metre stroke	[kg mm ² /m]	263.3	263.3	263.3	263.3	271.9	271.9
J_L per kg effective load	[kg mm ² /kg]	0.633	0.633	2.533	2.533	22.82	22.82

The mass moment of inertia J_A of the entire axis is calculated as follows:

$$J_A = J_0 + J_H \times \text{working stroke [m]} + J_L \times m_{\text{effective load [kg]}}$$

Materials

Axis	
Drive cover	Gravity die-cast aluminium, painted
Ball screw nut	Steel
Ball screw	Steel
Slide	
ELGD-...	Die-cast aluminium
ELGD-...-L	Wrought aluminium alloy
Cover strip	High-alloy stainless steel
Guide	Steel
Profile	Anodised wrought aluminium alloy
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-C1-L
Suitable for the production of Li-ion batteries	Suitable for battery production with reduced Cu/Zn/Ni values (F1a)

Technical data – Displacement encoder

Type	ELGD-...-M3
Resolution	[μm] 2.5
Max. travel speed with displacement encoder	[m/s] 7
Supply voltage	[VDC] 10 – 30 (±10%)
Current	[mA] Max. 150
Encoder signal	5 V TTL; A/A, B/B; reference signal (N/N) cyclically every 5 mm (zero pulse)
Signal output	Line driver, alternating, resistant to sustained short circuit
Electrical connection	8-pin plug connector, round design, M12
Cable length	[mm] 160

Operating and environmental conditions – Displacement encoder

Ambient temperature	[°C] –10 ... +70
Degree of protection	IP64
CE marking (see declaration of conformity)	To EU EMC Directive ¹⁾

1) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.


If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet


Load values

The indicated forces and torques refer to the centre of the guide. The point of application of force is the point where the centre of the guide and the longitudinal centre of the slide intersect. The appropriate size is selected using the following three steps:

1. Check the maximum permissible values (must not be exceeded)
2. Calculate the load comparison factor
3. Determine the service life

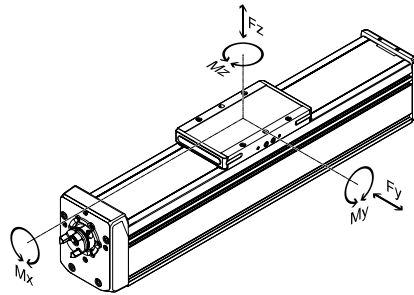

Distance from the slide surface to the centre of the guide



Distance from the slide surface to the centre of the guide

Size	60	80	120
Dimension x [mm]	60	62	80

1. Check the maximum permissible values





Max. permissible forces and torques for the overall axis (strength limits)

Size	60		80		120	
Slide design		L		L		L
Max. force F_y , overall axis [N]	930	1650	2500	4800	2957	5914
Max. force F_z , overall axis [N]	1300	2500	2500	4000	5608	9000
Max. torque M_x , overall axis [Nm]	31	70	100	160	202	441
Max. torque M_y , overall axis [Nm]	34	85	42	335	80	678
Max. torque M_z , overall axis [Nm]	26	45	42	275	95	527

Datasheet

Maximum permissible support spacing L as a function of force F

The axis may need to be supported in order to limit deflection in the case of long strokes.
The following graphs can be used to determine the maximum permissible support spacing L as a function of force F acting on the axis. The deflection is $f = 0.5\text{ mm}$.

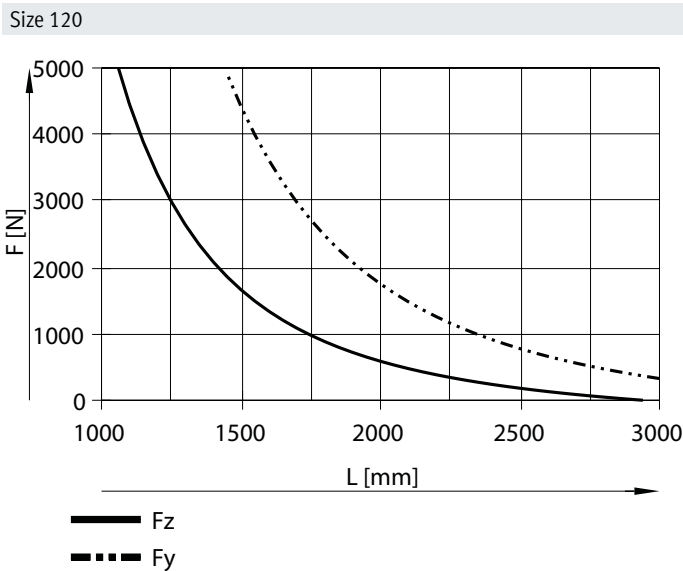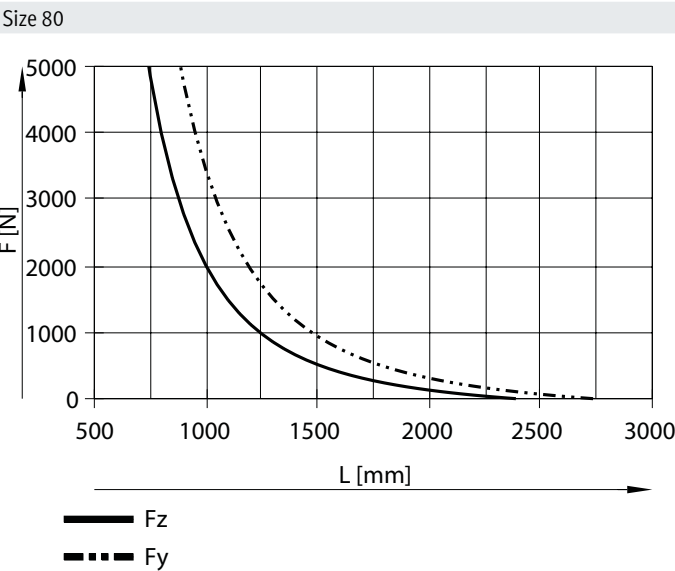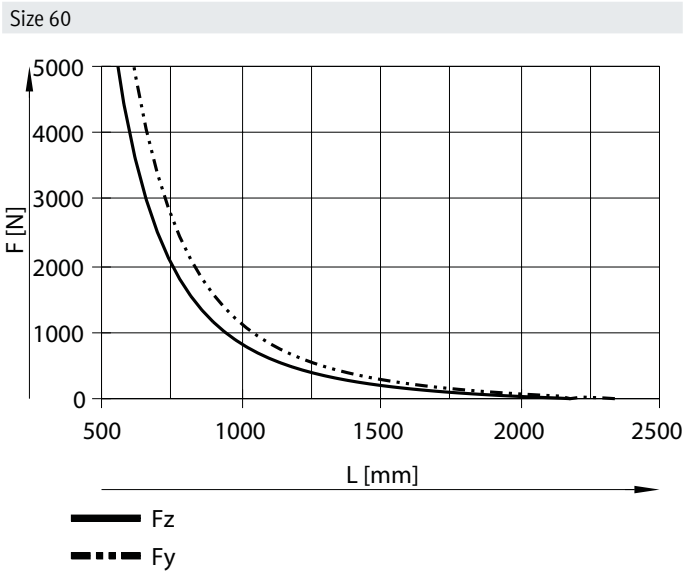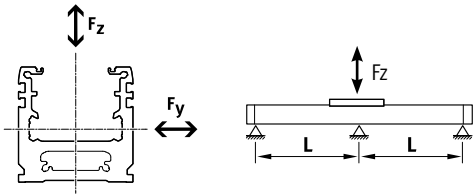

Datasheet

2. Calculate the load comparison factor



Note

For a guide system to have a service life of 5000 km, the load comparison factor must have a value of $f_v \leq 1$, based on the maximum permissible forces and torques for a service life of 5000 km.

This formula can be used to calculate a guide value.

The engineering software "Electric Motion Sizing" is available for more precise calculations

→ www.festo.com/x/electric-motion-sizing

If the axis is subjected to several of the indicated forces and torques at the same time, the following equation must be satisfied in addition to the indicated maximum loads:

Calculating the load comparison factor:

$$f_v = \frac{|F_{y1}|}{F_{y2}} + \frac{|F_{z1}|}{F_{z2}} + \frac{|M_{x1}|}{M_{x2}} + \frac{|M_{y1}|}{M_{y2}} + \frac{|M_{z1}|}{M_{z2}} \leq 1$$

$F1/M1$ = Values occurring in the application

$F2$ = Permissible values at 5000 km from the graph "load as a function of support spacing"

M_2 = Maximum permissible values (see table)

Max. permissible torques for the guide calculation with reference service life


Size	60	80	120
Slide design	L	L	L
Reference service life [km]	5000		
Max. torque M_x [Nm]	37	95	170
Max. torque M_y [Nm]	15	42	50
Max. torque M_z [Nm]	15	42	60

Permissible guide load as a function of the support spacing


Depending on how firmly the axis is supported, the maximum permissible forces vary due to the design of the guide system.

If the axis is used as a cantilever or in yoke operation, the values for a support spacing of 2000 mm can be selected.

Size 60

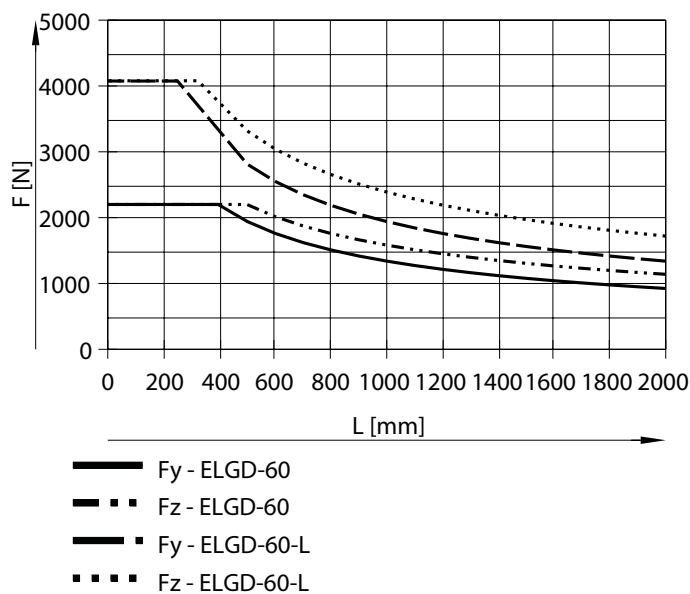

Size 80

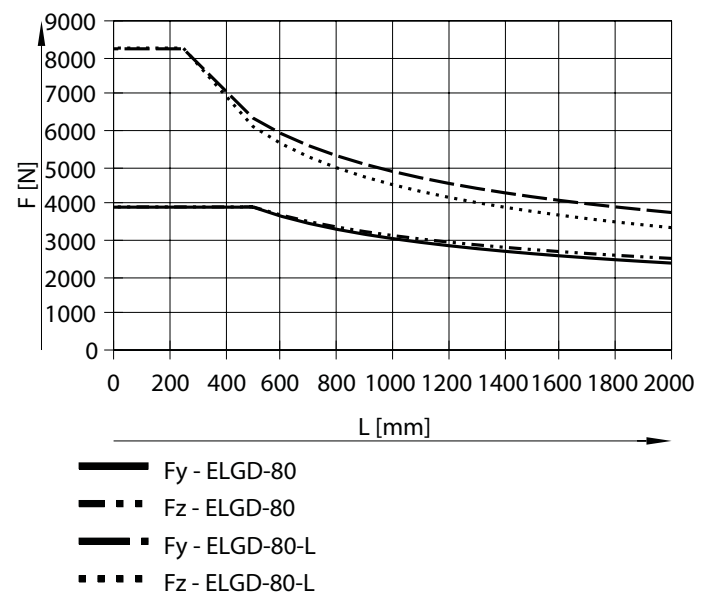


Datasheet

Permissible guide load as a function of the support spacing

Depending on how firmly the axis is supported, the maximum permissible forces vary due to the design of the guide system.
If the axis is used as a cantilever or in yoke operation, the values for a support spacing of 2000 mm can be selected.

Size 120

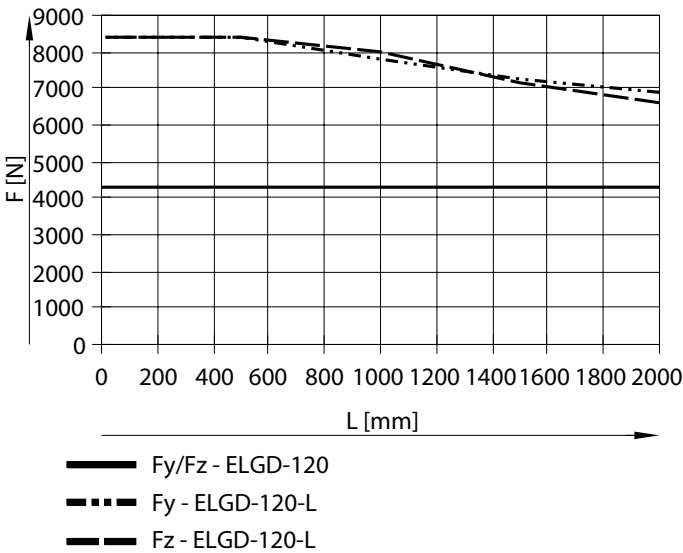

Datasheet

3. Determine the service life

The service life of the guide depends on the load. To be able to provide an indication of the service life of the guide, the graph below plots the load comparison factor f_v against the service life.

These values are only theoretical. You must consult your local Festo contact for a load comparison factor f_v greater than 1.3.

Load comparison factor f_v as a function of service life l


Example:

A user wants to move an x kg load. Using the formula (→ page 1) gives a value of 1.3 for the load comparison factor f_v . According to the graph, the guide would have a service life of approx. 2500 km. Reducing the acceleration reduces the M_z and M_y values. A load comparison factor f_v of 1 now gives a service life of 5000 km.

Note:

If the application has been calculated using “Electric Motion Sizing”, the average guide comparison figure represents the workload of the guide.

(100% average guide comparison figure corresponds to $f_v = 1$). With this value, the service life can be estimated using the service life graph

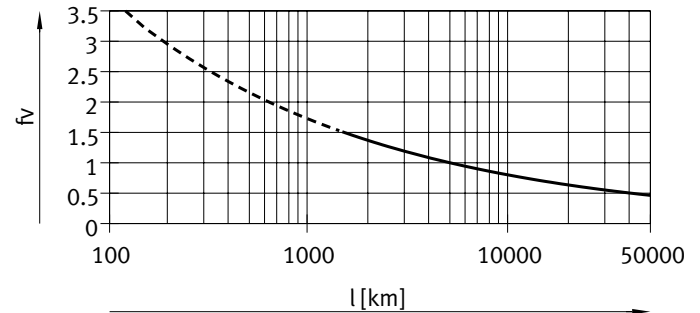

Comparison of the characteristic load values for 100 km with dynamic forces and torques of recirculating ball bearing guides

The characteristic load values of the bearing guides are standardised to ISO and JIS using dynamic and static forces and torques. These forces and torques are based on an expected service life of the guide system of 100 km to ISO or 50 km to JIS.

As the characteristic load values are dependent on the service life, the maximum permissible forces and torques for a 5000 km service life cannot be compared with the dynamic forces and torques of bearing guides to ISO/JIS.

To make it easier to compare the guide capacity of linear axes ELGD with bearing guides, the table below lists the theoretically permissible forces and torques for a calculated service life of 100 km. This corresponds to the dynamic forces and torques to ISO.

These 100 km values have been calculated mathematically and are only to be used for comparing with dynamic forces and torques to ISO. The drives must not be loaded with these characteristic values as this could damage the axes.

Max. permissible forces and torques for a theoretical service life of 100 km (from a guide perspective only)

Size		60		80		120	
Slide design			L		L		L
$F_{y_{max}}$	[N]	9208	18415	17576	35153	17576	35153
$F_{z_{max}}$	[N]	9208	18415	17576	35153	17576	35153
$M_{x_{max}}$	[Nm]	157	314	422	844	730	1459
$M_{y_{max}}$	[Nm]	60	500	162	1356	162	1920
$M_{z_{max}}$	[Nm]	60	500	162	1356	162	1920

Datasheet


Service life of the ball screw

- The service life of the ball screw axis depends on the service life of the guide as well as that of the drive screw.
The operating coefficient plays a considerable role in determining the possible service life. It can be determined with the help of the table below
- The distance between the foremost and rearmost positions must be at least 2.5 times the screw pitch per travel cycle
- The specifications for the running performance are based on experimentally determined and theoretically calculated data (at room temperature).
The running performance that can be achieved in practice can deviate considerably from the specified curves under different parameters



Calculation of the mean feed force F_{xm} with ball screw

$$F_{xm} = \sqrt[3]{\frac{F_{x1}^3 \cdot s_1 + \dots + F_{xn}^3 \cdot s_n}{s_1 + \dots + s_n}}$$

F_{xm} = Mean feed force
 $F_{x1/n}$ = Feed force of the section
 $s_{1/n}$ = Part of the movement cycle that is travel




Mean feed force F_{xm} as a function of running performance L, with an operating coefficient f_B of 1.0 at room temperature

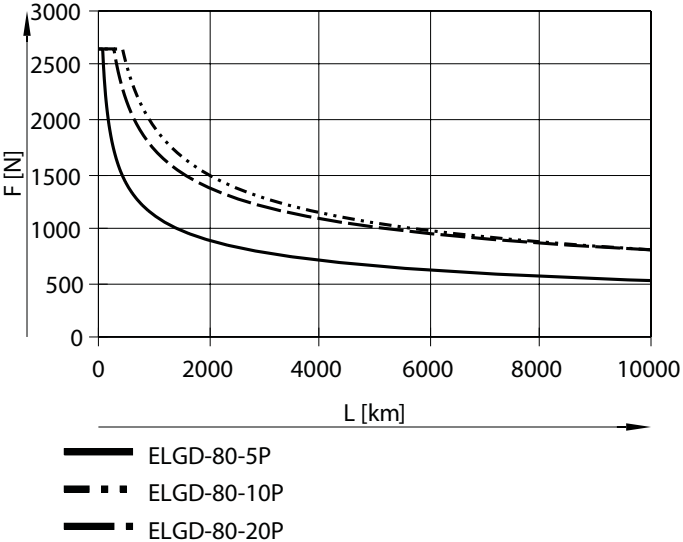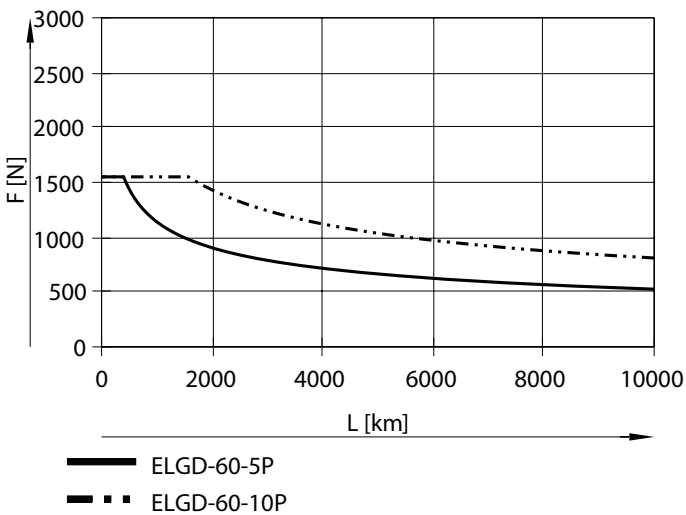

Datasheet

Mean feed force F_{xm} as a function of running performance L , with an operating coefficient f_B of 1.0 at room temperature
Size 120

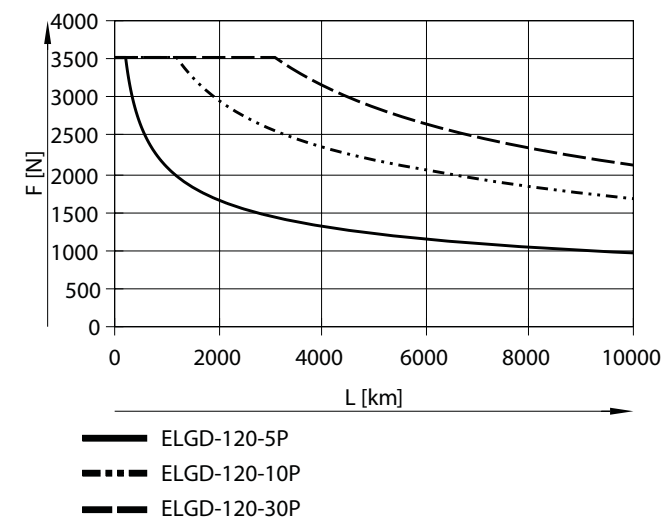

Service life taking into account the operating coefficient

$$L_1 = \frac{L}{f_B^3}$$

 L_{ist} = Actual service life
 L = Target service life
(→ graph)
 f_B = Operating coefficient

Load ¹⁾	Operating coefficient f_B	Application example
None	1.0 ... 1.2	Measuring machine
Light	1.2 ... 1.4	Handling, robot technology
Medium	1.4 ... 1.6	Press-in operations
High	1.6 ... 2.0	Construction, agriculture


1) Loads caused by impact, temperature, contamination, shock and vibrations

Datasheet


Max. feed force F as a function of the working stroke l

The feed force that pushes the ball screw in the direction of the motor must be limited depending on the stroke due to possible buckling (e.g. acceleration of a load mass away from the motor, deceleration of a load moving towards the motor).
The feed force in the opposite direction is not affected by this.


Size 60

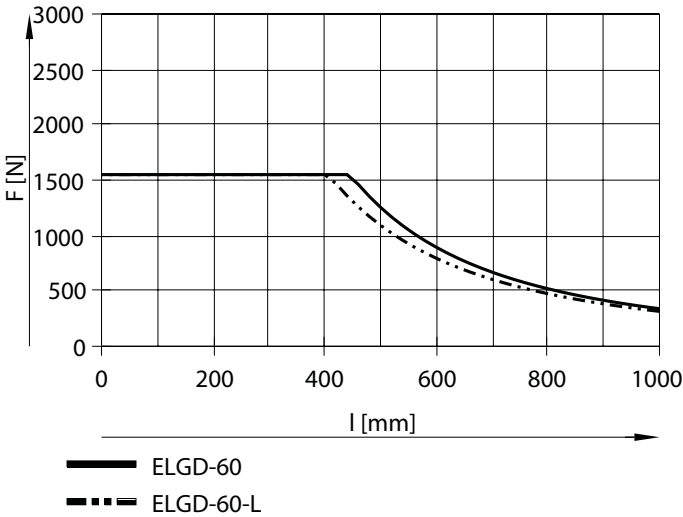

Size 80

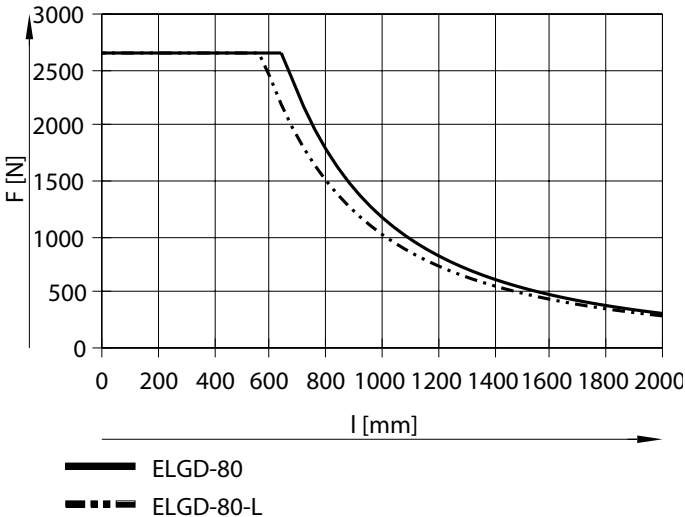


Size 120

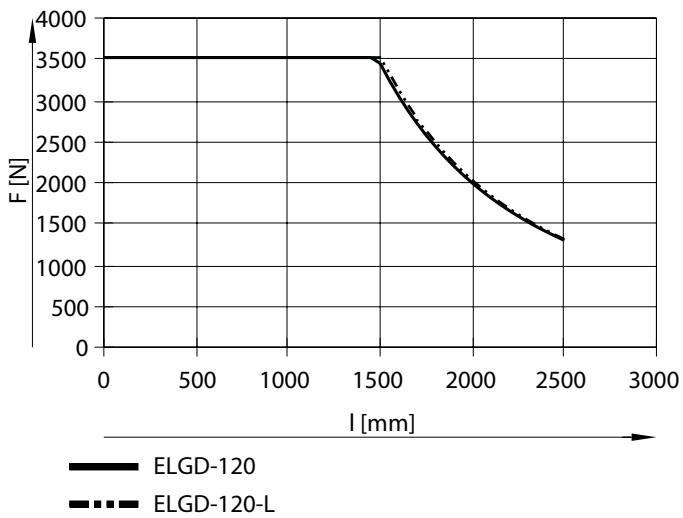

Datasheet


Speed v as a function of working stroke l

Size 60

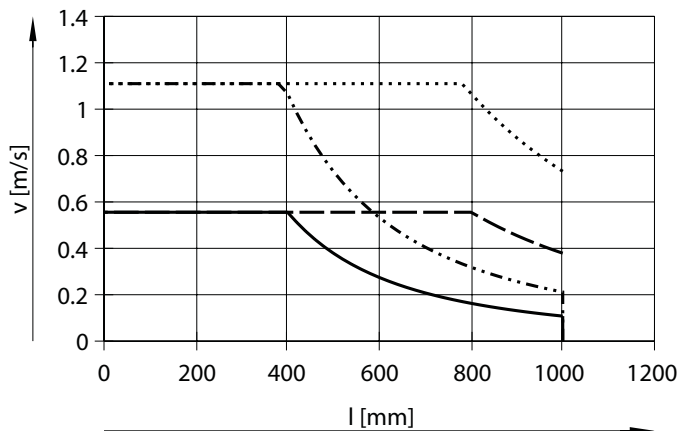


— ELGD-60-5P
 - - - ELGD-60-10P
 - - - ELGD-60-5P-SU
 ELGD-60-10P-SU

Size 80

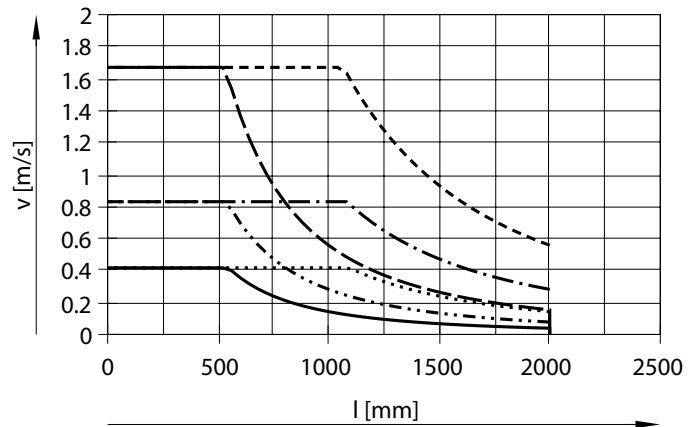

— ELGD-80-5P
 - - - ELGD-80-10P
 - - - ELGD-80-20P
 ELGD-80-5P-SU
 - - - ELGD-80-10P-SU
 - - - ELGD-80-20P-SU


Size 120

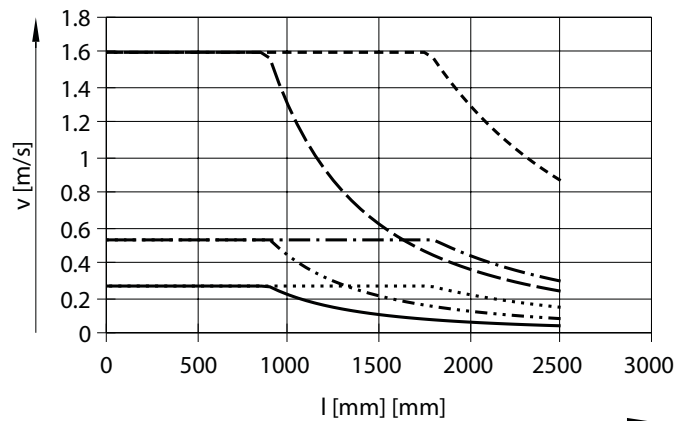

— ELGD-120-5P
 - - - ELGD-120-10P
 - - - ELGD-120-30P
 ELGD-120-5P-SU
 - - - ELGD-120-10P-SU
 - - - ELGD-120-30P-SU


Datasheet

Speed v as a function of rotational speed n

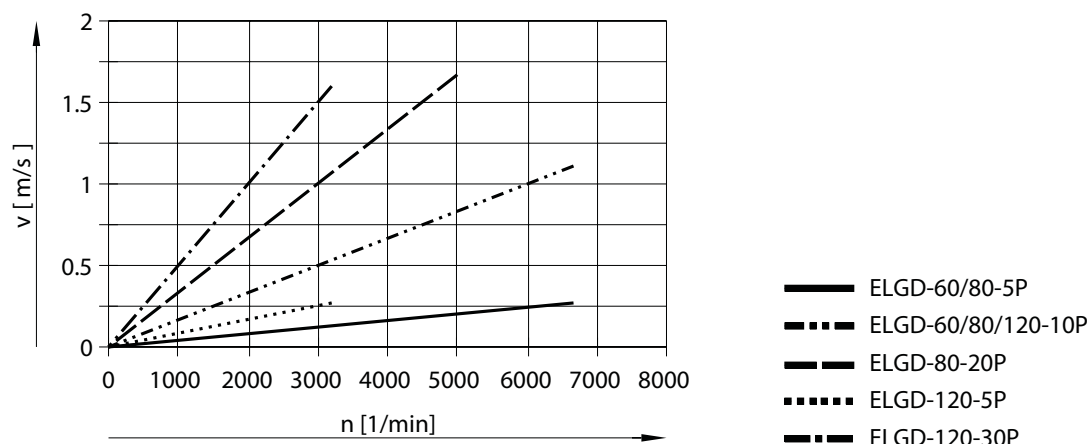


Feed force F as a function of input torque M


Size 60

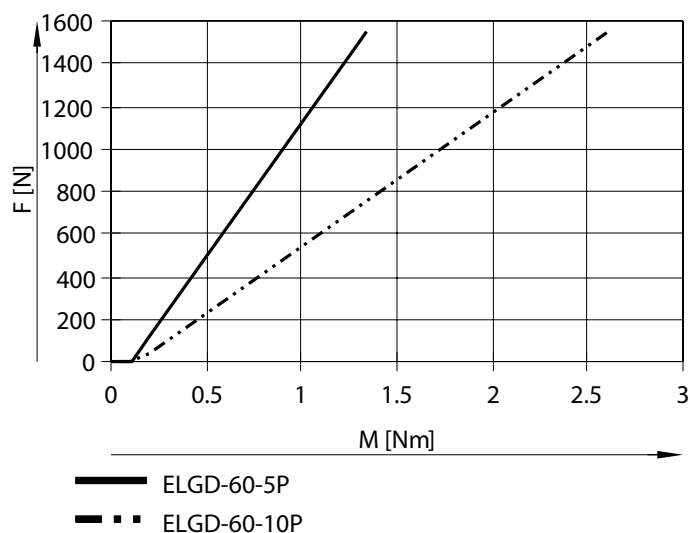

Size 80

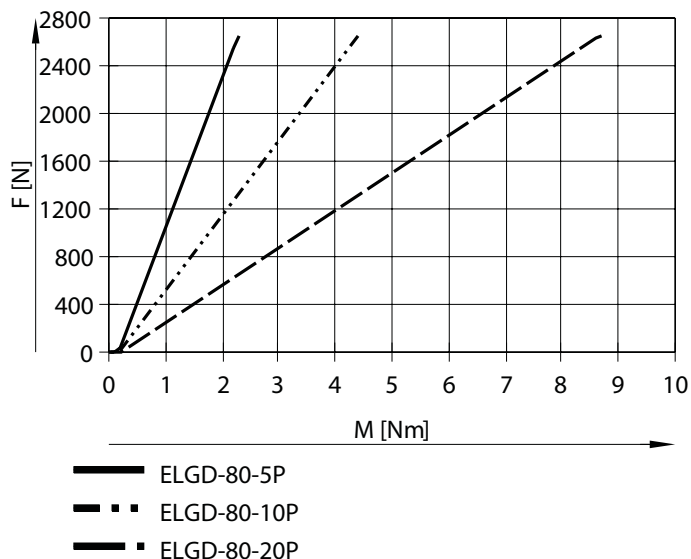


Size 120

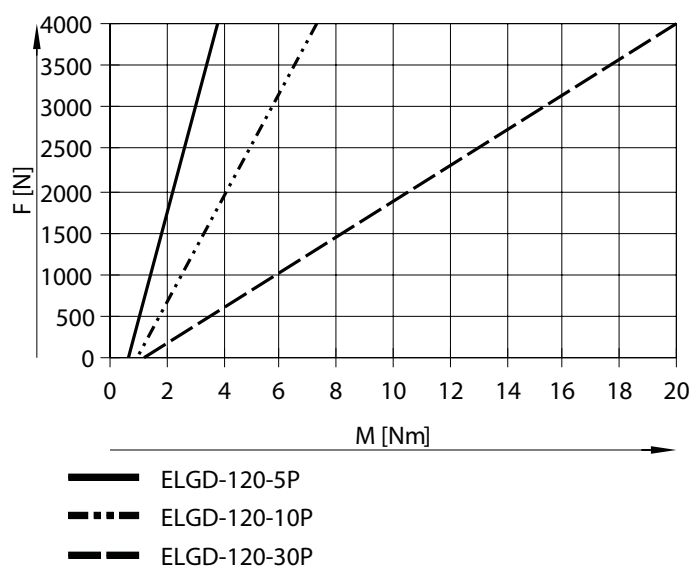

Datasheet

Second moment of area



Size		60	80	120
I _y	[mm ⁴]	0.509x10 ⁶	1.213x10 ⁶	3.55x10 ⁶
I _z	[mm ⁴]	0.686x10 ⁶	2.052x10 ⁶	8.985x10 ⁶

Recommended deflection limit values


Adherence to the following limit values for deflection is recommended to ensure the continuing functionality of the axes. Greater deformation can result in increased friction, greater wear and reduced service life.

Size	Dynamic deflection (moving load)	Static deflection (stationary load)
60, 80, 120	0.05% of the axis length, max. 0.5 mm	0.1% of the axis length

Working stroke reduction

For axis ELGD with additional slide ZL/ZR

For a ball screw axis with additional slide, the working stroke is reduced by the length of the additional slide and the distance between both slides

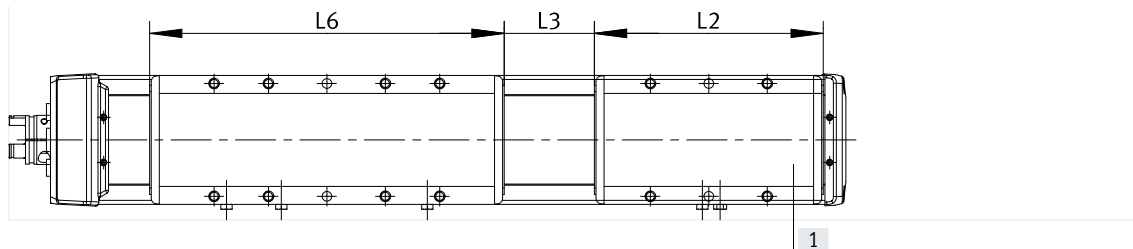

L6 = Slide length
 L2 = Additional slide length
 L3 = Distance between the two slides
 [1] Additional slide

Example:

Type ELGD-BS-KF-60-500-...-ZR
 Working stroke without additional slide = 500 mm
 L3 = 50 mm
 L2 = 118 mm
 Working stroke with additional slide = 332 mm
 (500 mm – 50 mm – 118 mm)


Dimensions – Additional slide

Size		60	80	120
Length L2	[mm]	118	142	162
Min. distance between the slides L3	[mm]	≥ 50	≥ 50	≥ 50


Datasheet

Dimensions – ELGD-BS-60/80...

Download CAD data → www.festo.com

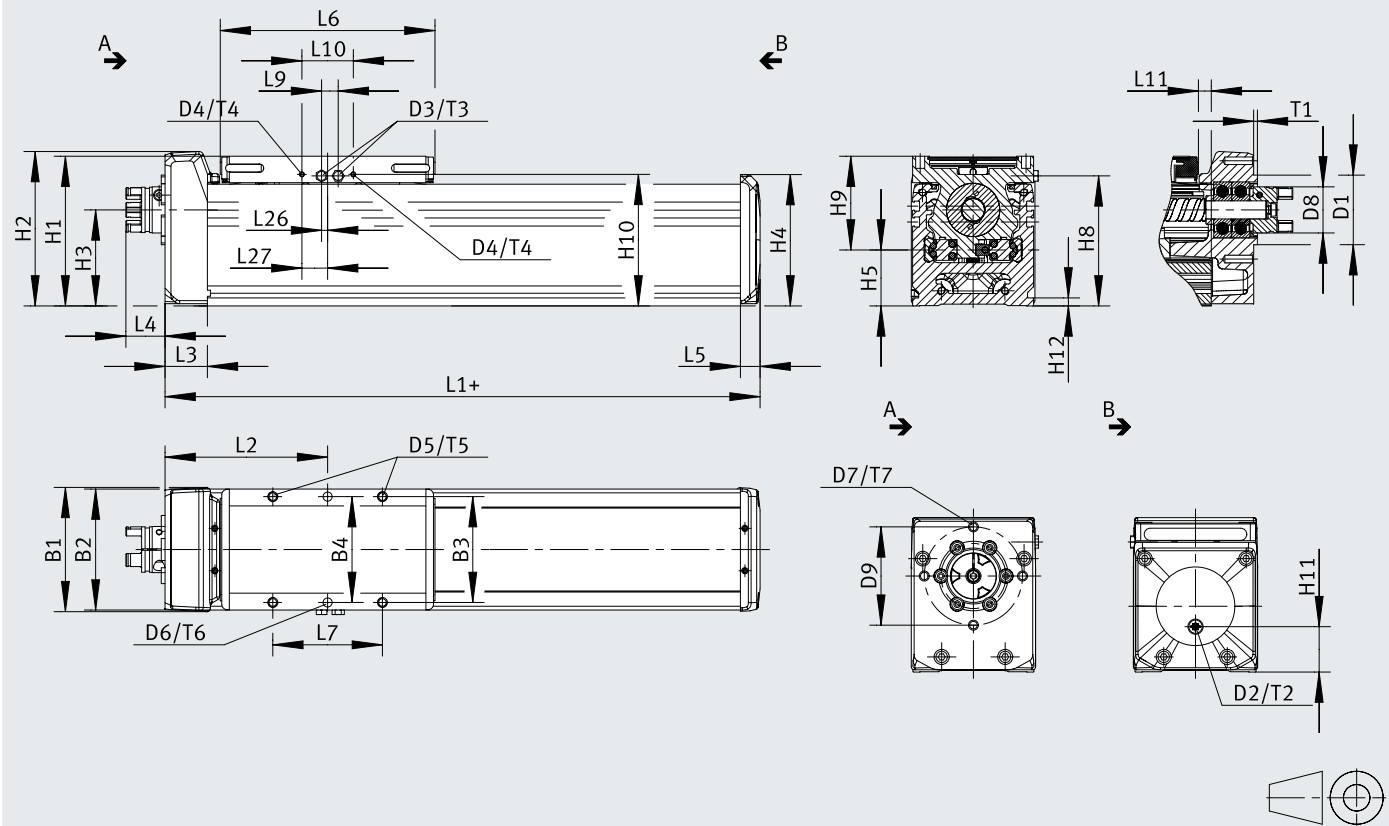

ELGD-BS-60

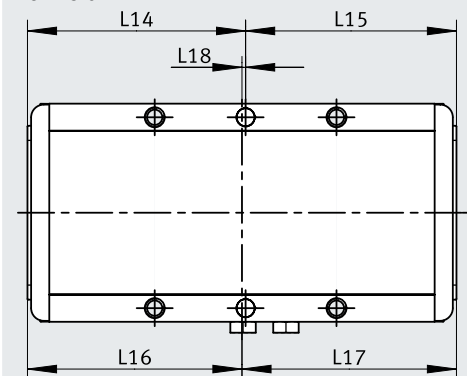

+ = plus stroke length + 2x stroke reserve

Datasheet


	B1	B2	B3	B4 ±0.03	D1 ∅ f7	D2	D3	D4	D5	D6 ∅ H7	D7	D8 ∅
ELGD-BS-60	62	60	52.5	52.5	42	G1/8	M6	M3	M5	5	M4	30.5
ELGD-BS-60-SU												
ELGD-BS-80	82.2	80	70	70	46	G1/8	M6	M3	M6	6	M6	30.5
ELGD-BS-80-SU												

	D9 ∅	H1	H2	H3	H4	H5	H8	H9	H10	H11	H12	L1
ELGD-BS-60	48	82	79	49.4	69.9	22	70	60	71	23.4	5.3	170.5
ELGD-BS-60-SU												178
ELGD-BS-80	65	99	102.2	63.5	86.9	37	86	62	87	30	5.3	193.5
ELGD-BS-80-SU												199

	L2	L3	L4	L5	L6	L7	L9	L10	L11		L14	L15
	min.					±0.1			min.	max.		
ELGD-BS-60	95	26.5	26.9	15.5	118	50	11.8	34	9	9.5	60	58
ELGD-BS-60-SU	95											
ELGD-BS-80	108	28	25.9	13	142	72.5	11	34	9	9.5	–	–
ELGD-BS-80-SU	108											

	L16	L17	L18	L26	L27	T1	T2	T3	T4	T5	T6 ±0.05	T7
ELGD-BS-60	59	59	1	12.9	-0.3	2.5	6	6	7	16.5	6	8
ELGD-BS-60-SU												
ELGD-BS-80	–	–	–	17	4	2.5	6	6	7	17.5	8	15
ELGD-BS-80-SU												


Download CAD data → www.festo.com



	L7	L9	L10	L11		L14	L26	L27	T1	T2	T3	T4	T5	T6	T7
	±0.1			min.	max.									±0.1	
ELGD-BS-120	92.5	12.5	34	10.5	22.5	56.5	15	4.5	5	6	6	7	17.5	8	18
ELGD-BS-120-SU															

Datasheet

Dimensions – ELGD-BS-60/80-...-L (with long slide)

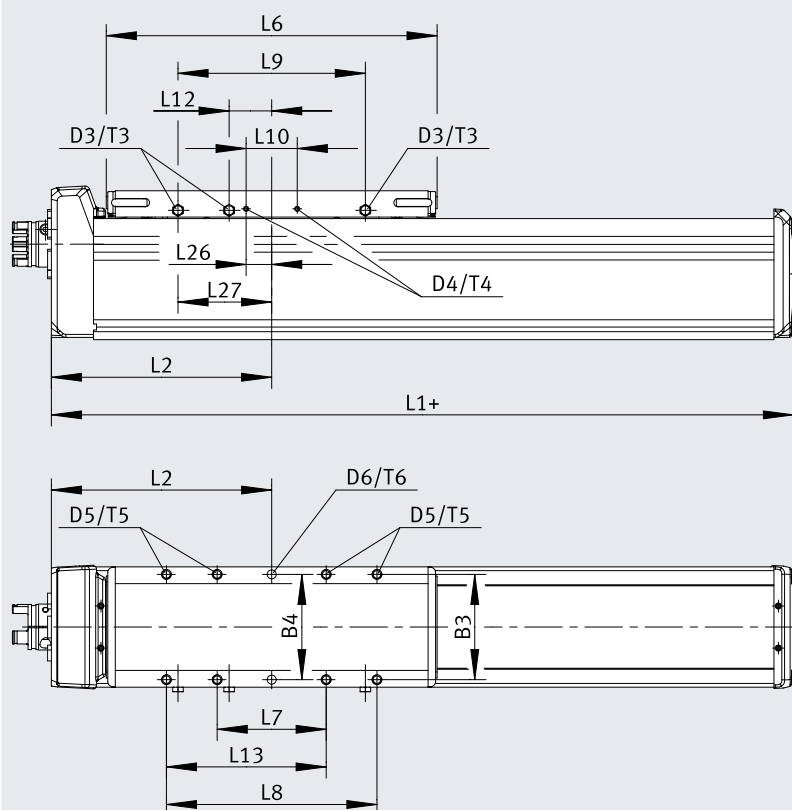Download CAD data → www.festo.com


+ = plus stroke length + 2x stroke reserve

	B3	B4	D3	D4	D5	D6 Ø H7	L1	L2	L6	L7	L8
		±0.03						min.		±0.1	±0.1
ELGD-BS-60-L	52.5	52.5	M6	M3	M5	5	211.5	116.5	159	50	95
ELGD-BS-60-SU-L							226	116.5			
ELGD-BS-80-L	70	70	M6	M3	M6	6	271.5	147.5	220	72.5	140
ELGD-BS-80-SU-L							271.5	147.5			

	L9	L10	L12	L13	L26	L27	T3	T4	T5	T6
										±0.05
ELGD-BS-60-L	79	34	5.9	72.5	20	38	6	7	16.5	6
ELGD-BS-60-SU-L										
ELGD-BS-80-L	124.6	34	28.3	106.3	17	28.3	6	7	17.5	8
ELGD-BS-80-SU-L										

Datasheet

Dimensions – ELGD-BS-120-...-L (with long slide)
 Download CAD data → www.festo.com

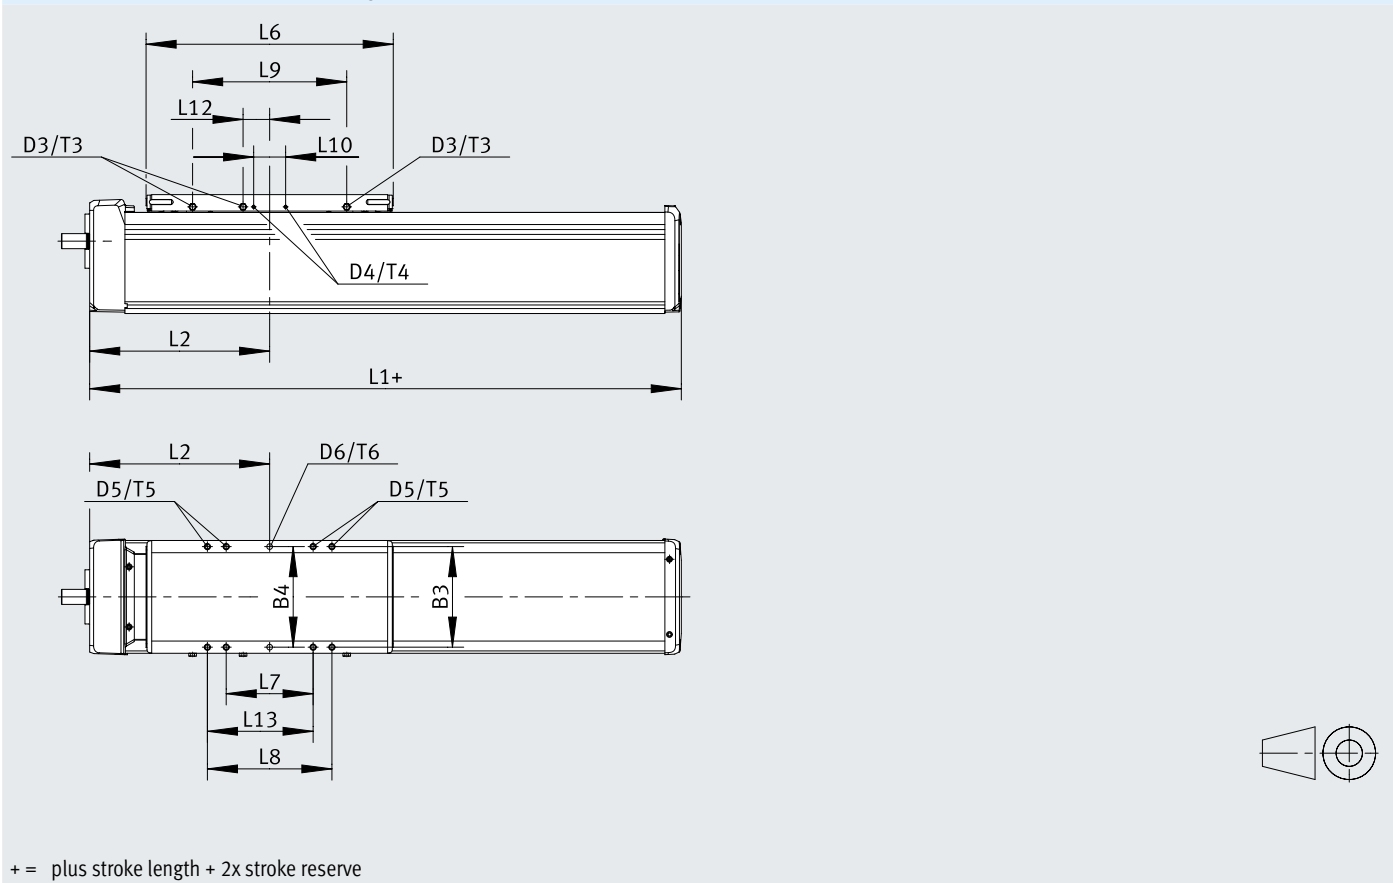


	B3	B4	D3	D4	D5	D6 Ø H7	L1	L2 min.	L6
ELGD-BS-120-L	107	107	M6	M3	M6	6	330.5	179.5	263
ELGD-BS-120-SU-L							330.5	191.5	

	L7	L8	L9	L10	L12	L13	L26	L27	T3	T4	T5	T6
	±0.1	±0.1				±0.1						±0.1
ELGD-BS-120-L	92.5	132.5	164	34	28.3	112.5	17	28.3	6	7	17.5	8
ELGD-BS-120-SU-L												

Datasheet

Dimensions – ELGD-BS-...-ZR (with additional slide)

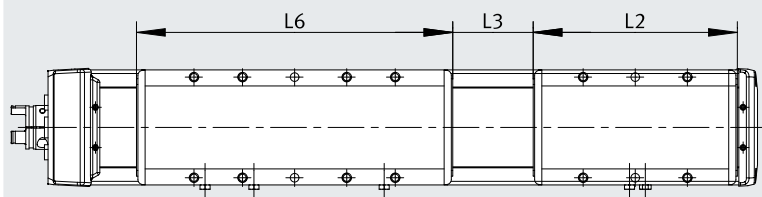Download CAD data → www.festo.com

	L2	L3 (Minimum distance)	L6
ELGD-BS-60	118	50	118
ELGD-BS-80	142	50	142
ELGD-BS-120	162	50	162
ELGD-BS-60-L	118	50	159
ELGD-BS-80-L	142	50	220
ELGD-BS-120L	162	50	263


Dimensions – ELGD-BS-...- (profile)

Download CAD data → www.festo.com

ELGD-BS-60

ELGD-BS-80

ELGD-BS-120

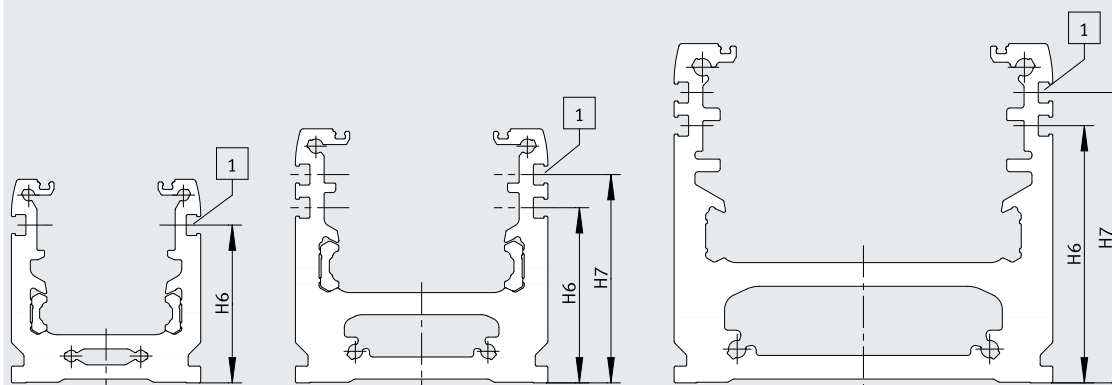


[1] Sensor slot for proximity switch

	H6	H7
ELGD-BS-60	50	–
ELGD-BS-80	55.5	66
ELGD-BS-120	81.5	92

Datasheet

Dimensions – ELGD-BS-...-M (for direct mounting)

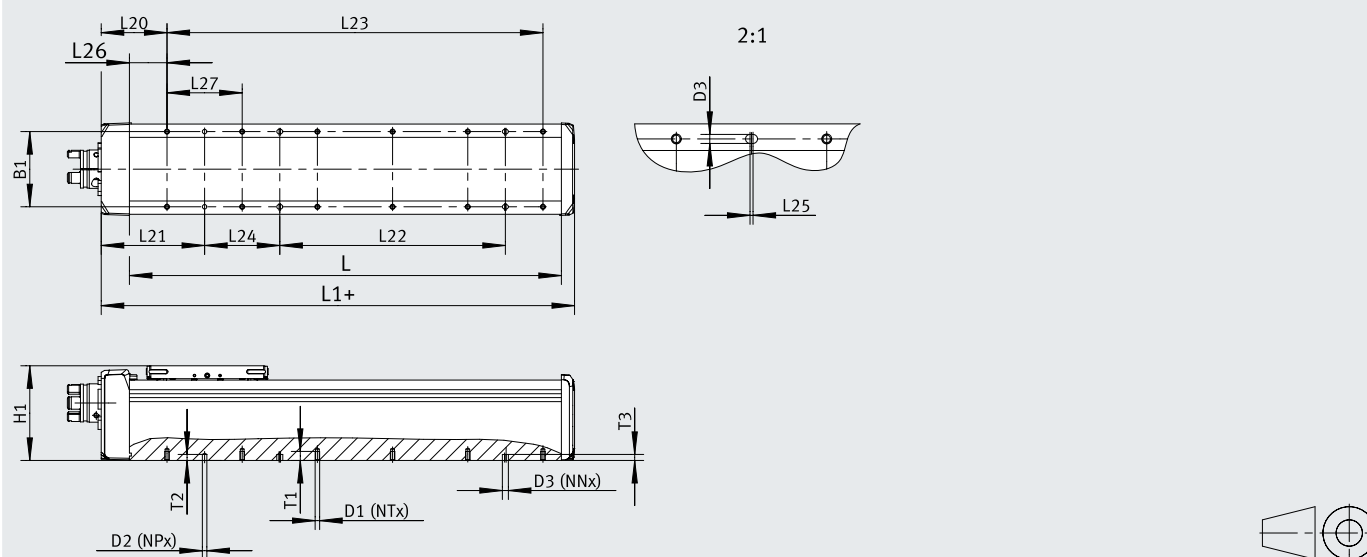Download CAD data → www.festo.com

+ = plus stroke length + 2x stroke reserve

$$L23 = (NT/2-1) \times 100$$

	B1	B2 H7	D1	D2 Ø H7	H1	L (with zero stroke length)	L20	L21
ELGD-BS-60-...-M	43	6	M5	6	81.4	128.5	76.5	126.5
ELGD-BS-60-...-SU-M						136		
ELGD-BS-60-...-L-M						169.5		
ELGD-BS-60-...-L-SU-M						184		
ELGD-BS-80-...-M	61	6	M6	6	98.4	152.5	78	128
ELGD-BS-80-...-SU-M						158		
ELGD-BS-80-...-L-M						230.5		
ELGD-BS-120-...-M	100	6	M6	6	125.9	174.5	87.5	137.5
ELGD-BS-120-...-SU-M						198.5		
ELGD-BS-120-...-L-M						275.5		

	L25	L26	L27	T1	T2	T3
ELGD-BS-60-...-M	2	50	100	10.5	8	8
ELGD-BS-60-...-SU-M						
ELGD-BS-60-...-L-M						
ELGD-BS-60-...-L-SU-M				12.5		
ELGD-BS-80-...-M						
ELGD-BS-80-...-SU-M						
ELGD-BS-80-...-L-M				12.5		
ELGD-BS-120-...-M						
ELGD-BS-120-...-SU-M						
ELGD-BS-120-...-L-M						

Datasheet

L	D1 ¹⁾		D2 ²⁾	D3 ³⁾		L24	
	NT	L23	NP	NN	L22		
<270	4	100	2	–	–	–	
≥270	6	200		2		4	100
≥370	8	300		100			
≥470	10	400			100		
≥570	12	500			200		
≥670	14	600			300		
≥770	16	700			400		
≥870	18	800			500		
≥970	20	900			600		
≥1070	22	1000			700		
≥1170	24	1100			800		
≥1270	26	1200			900		
≥1370	28	1300			1000		
≥1470	30	1400			1100		
≥1570	32	1500			1200		
≤1650				1300			

1) Threaded hole


2) Pin hole

3) Slotted hole

Datasheet

Dimensions – ELGD-BS-...-M7 (for front-end use)

Download CAD data → www.festo.com

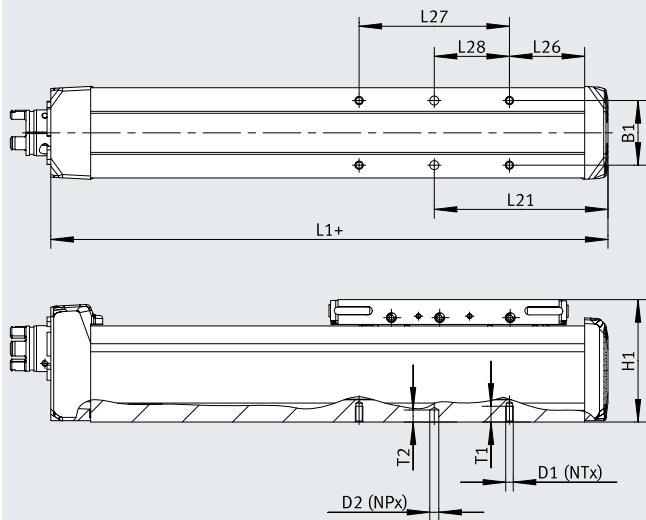


+ = plus stroke length + 2x stroke reserve

	B1	D1	D2 Ø H7	H1	L21	L26	L27	L28	T1	T2
ELGD-BS-60-...-M7	43	M5	6	81.4	115.5	50	100	50	10.5	8
ELGD-BS-60-...-SU-M7										
ELGD-BS-60-...-L-M7										
ELGD-BS-60-...-L-SU-M7	61	M6	6	98.4	113	50	100	50	12.5	8
ELGD-BS-80-...-M7										
ELGD-BS-80-...-SU-M7										
ELGD-BS-80-...-L-M7										

Datasheet

Dimensions – Angle kit EAHM-E24-AK-60

Download CAD data → www.festo.com

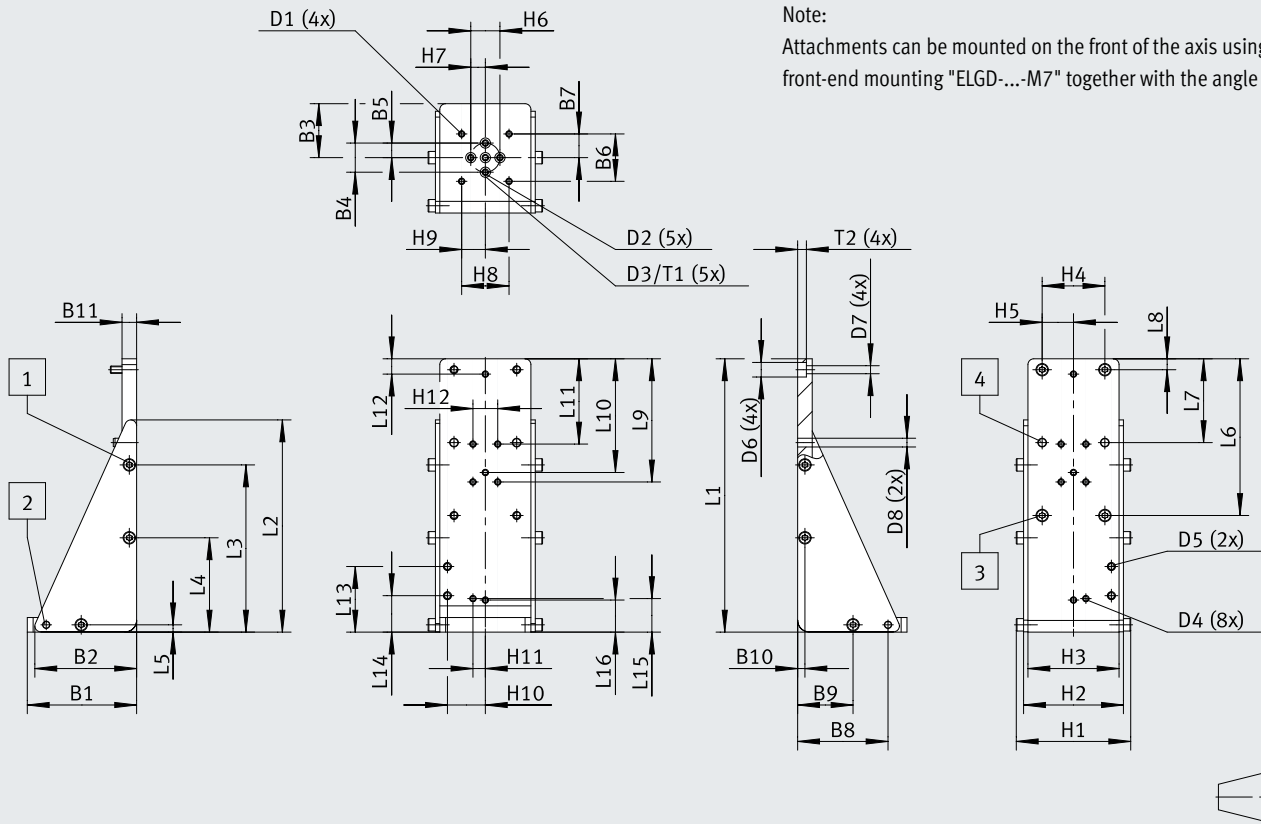

- [1] Head screw M5x12
- [2] Cylindrical pin
- [3] Head screw M5x12
- [4] Cylindrical pin

		B1	B2	B3	B4	B5	B6	B7	B8	B9	B10
EAHM-E24-AK-60	ELGD-BS-60	75	69.8	37	20	10	32.5	16.3	62	38	5
		B11	D1	D2	D3 Ø H7	D4	D5	D6 Ø H13	D7 Ø H13	D8 Ø H7	H1
EAHM-E24-AK-60	ELGD-BS-60	10	M4	M5	7	M4	M5	10	5.5	6	78.5
		H2	H3	H4	H5	H6	H7	H8	H9	H10	H11
EAHM-E24-AK-60	ELGD-BS-60	68.5	62.5	43	21.5	20	10	32.5	16.3	26	8.5
		H12	L1	L2	L3	L4	L5	L6	L7	L8	L9
EAHM-E24-AK-60	ELGD-BS-60	17	187.5	145.6	114.7	64.7	5	107.5	57.5	7.5	84.5
		L10	L11	L12	L13	L14	L15	L16	T1	T2	
EAHM-E24-AK-60	ELGD-BS-60	78	58.5	10.5	45	25	23	22	1.65	6	


Datasheet

Dimensions – Angle kit EAHM-E24-AK-80

Download CAD data → www.festo.com



Attachments can be mounted on the front of the axis using the feature front-end mounting "ELGD-...-M7" together with the angle kit.

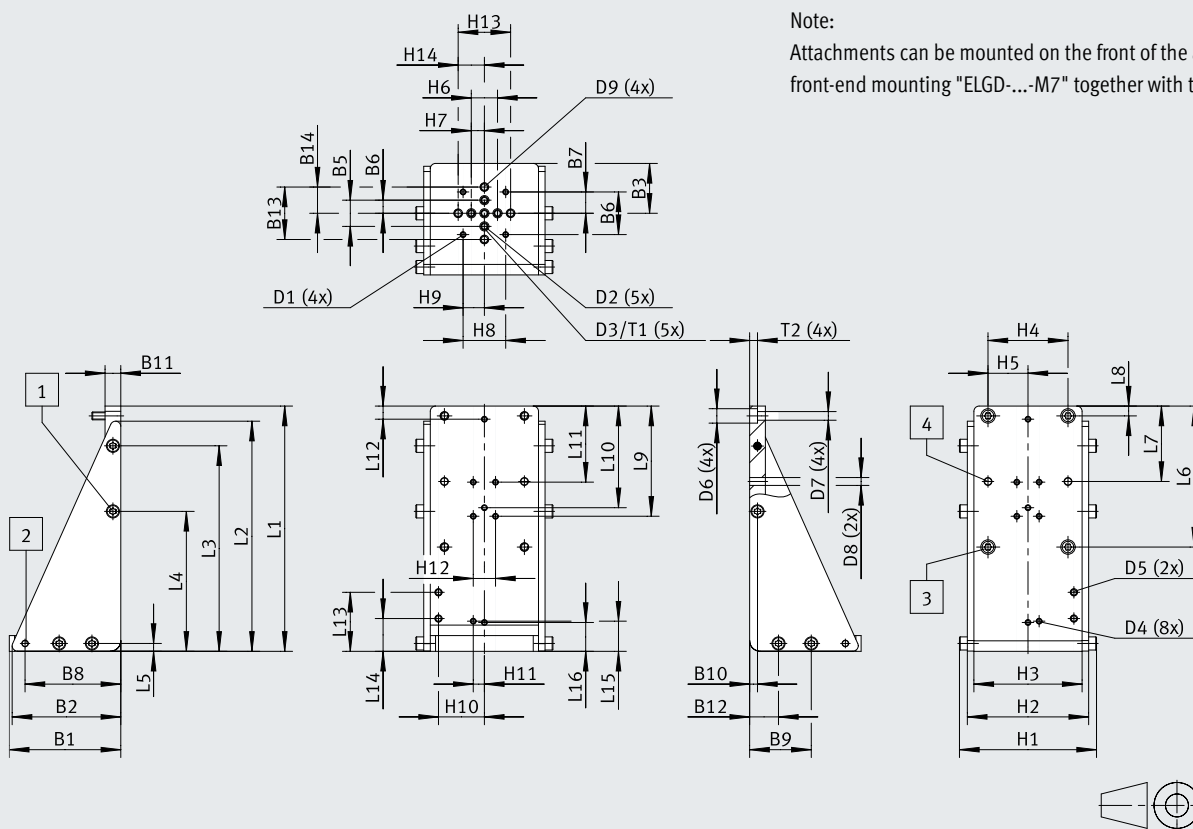

- [1] Head screw M6x16
- [2] Cylindrical pin
- [3] Head screw M6x16
- [4] Cylindrical pin

		B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11
EAHM-E24-AK-80	ELGD-BS-80	85	82.8	38	20	10	32.5	16.3	73	47	6	12


		B12	B13	B14	D1	D2	D3 Ø H7	D4	D5	D6 Ø H13	D7 Ø H13	D8 Ø H7
EAHM-E24-AK-80	ELGD-BS-80	22	40	20	M4	M5	7	M4	M5	11	6.6	6

		D9	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10
EAHM-E24-AK-80	ELGD-BS-80	M6	104.5	92.5	82.5	61	30.5	20	10	32.5	16.3	35

		H11	H12	H13	H14	L1	L2	L3	L4	L5	L6	L7
EAHM-E24-AK-80	ELGD-BS-80	8.5	17	40	20	187	175.5	156.7	106.7	6	107.5	57.5

		L8	L9	L10	L11	L12	L13	L14	L15	L16	T1	T2
EAHM-E24-AK-80	ELGD-BS-80	7.5	84	77.5	58	10	45	25	23	22	1.7	6

Datasheet

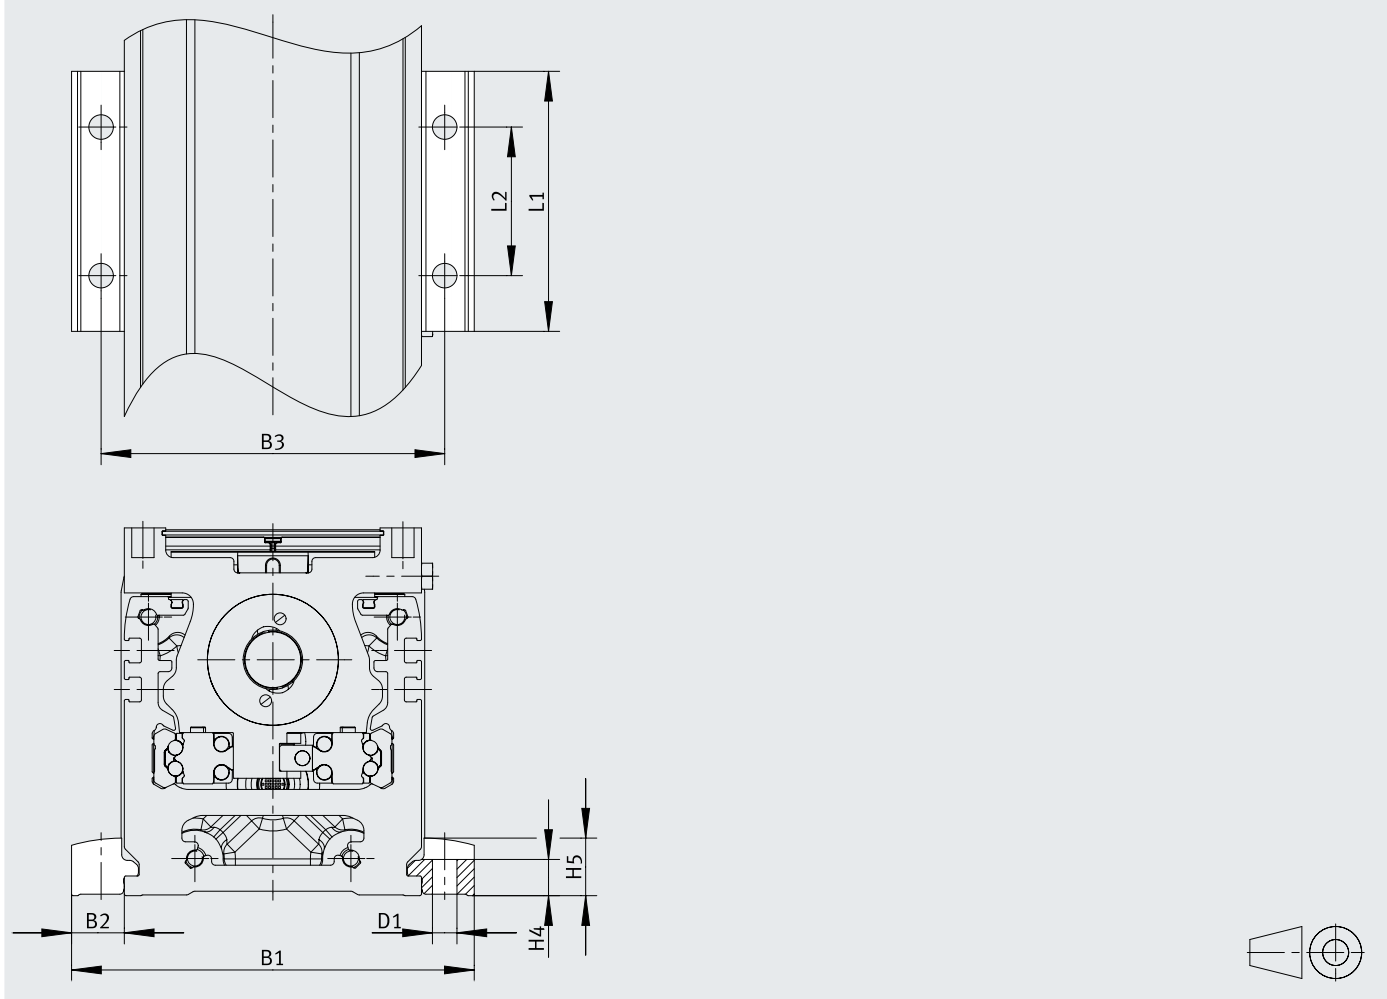
**Dimensions – Profile mounting EAHF-E24-60-P
(standard mounting)**
Download CAD data → www.festo.com

		B1	B2	B3	D1 Ø H13	H4	H5	L1	L2
EAHF-E24-60-P	ELGD-BS-60	88.4	14.2	72.5	6.6	10.3	16.5	70	40
	ELGD-BS-80	108.4	14.2	92.5	6.6	10.3	16.5	70	40
	ELGD-BS-120	148.4	14.2	132.5	6.6	10.3	16.5	70	40

Datasheet

Dimensions – Profile mounting EAHF-E24-60-P-S


Download CAD data → www.festo.com

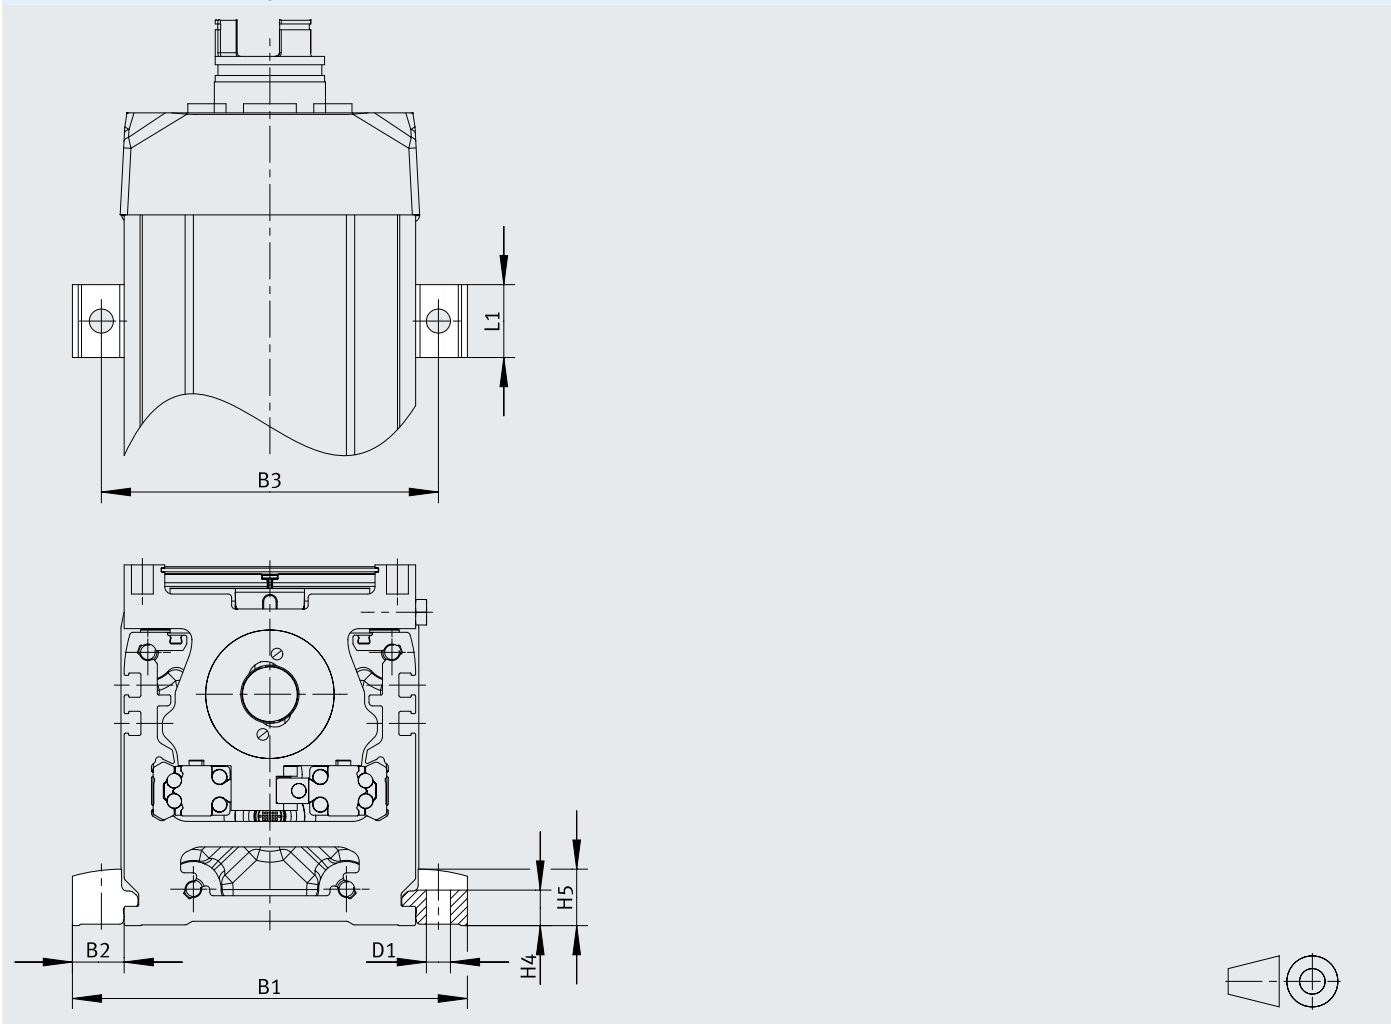

		B1	B2	B3	D1 Ø H13	H4 ±0.1	H5	L1
EAHF-E24-60-P-S	ELGD-BS-60	88.4	14.2	72.5	6.6	10.3	16.5	20
	ELGD-BS-80	108.4	14.2	92.5	6.6	10.3	16.5	20
	ELGD-BS-120	148.4	14.2	132.5	6.6	10.3	16.5	20

Datasheet

Dimensions – Profile mounting EAHF-E24-60-P-D

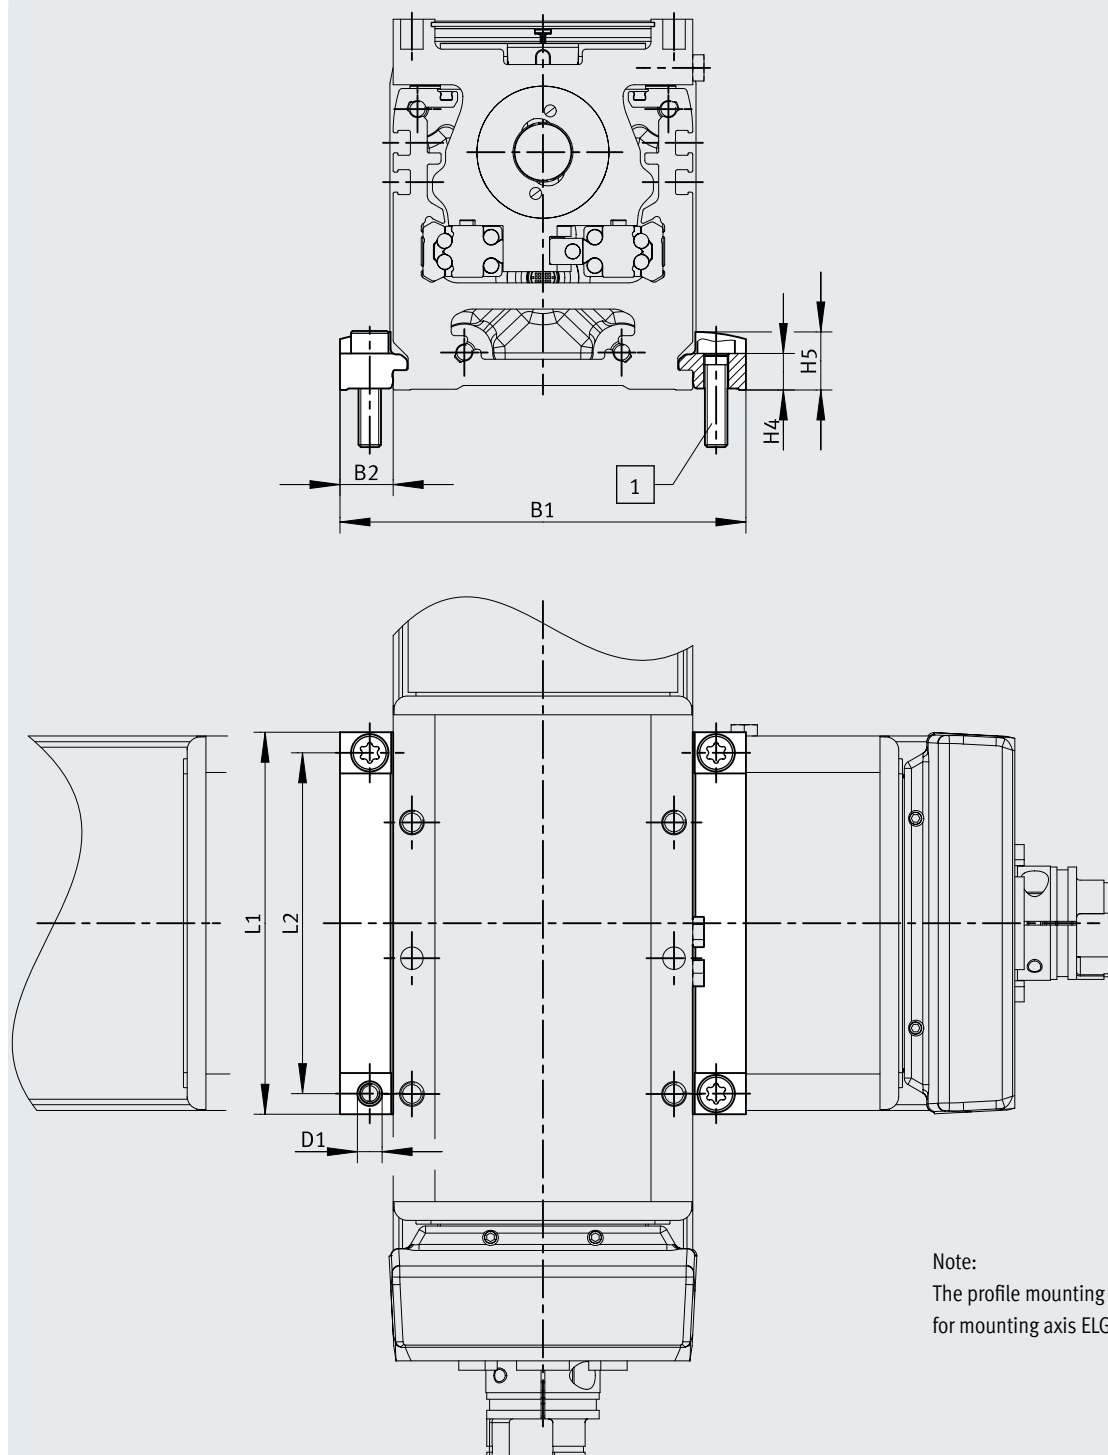Download CAD data → www.festo.com


[1] Screws are included in the scope of delivery

		B1	B2	D1 Ø H13	H4 ±0.1	H5	L1	L2
EAHF-E24-60-P-D5	ELGD-BS-60	88.4	14.2	5.5	10.3	16.5	62	52.5
EAHF-E24-60-P-D4	ELGD-BS-80	108.4	14.2	6.6	10.3	16.5	81	70
EAHF-E24-60-P-D7	ELGD-BS-120	148.4	14.2	6.6	10.3	16.5	120	107

Datasheet

Dimensions – Adjusting kit EADC-E16-...

Download CAD data → www.festo.com

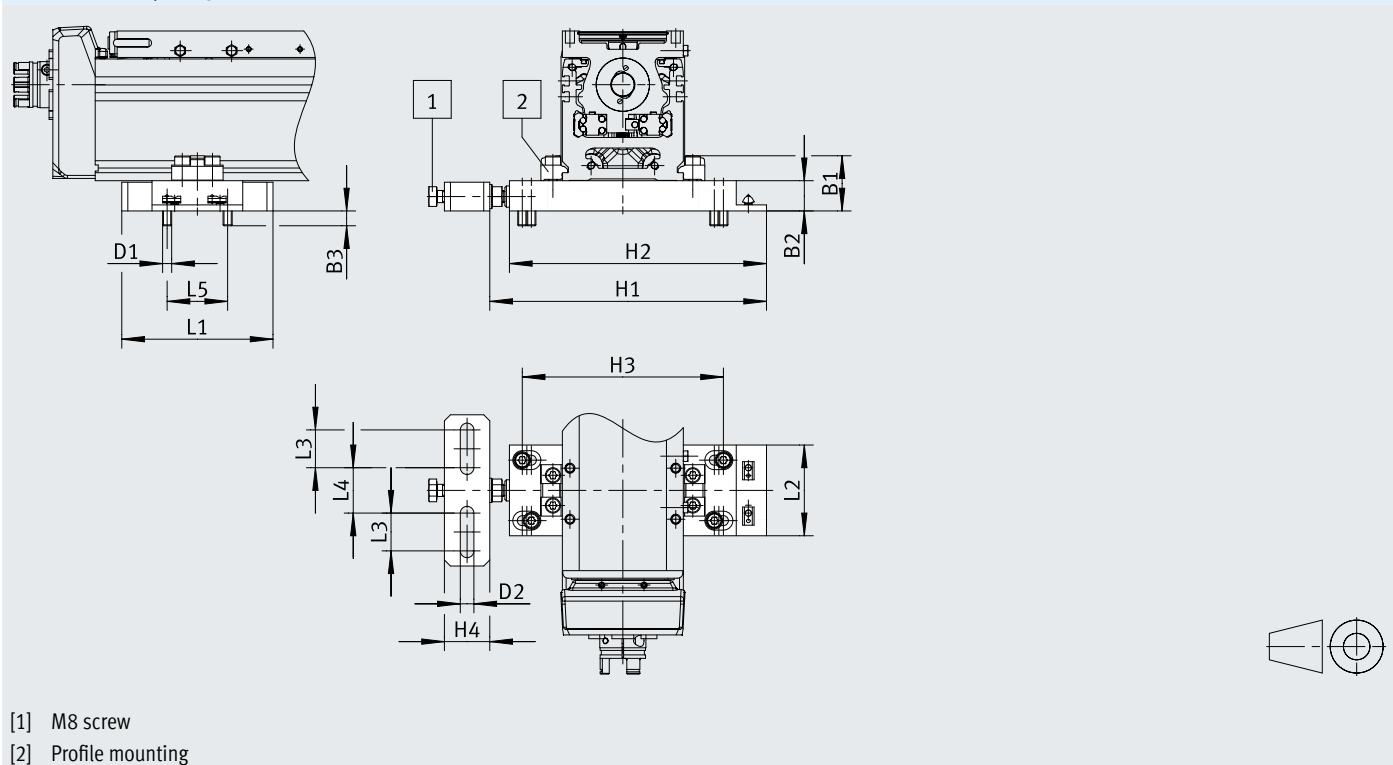


		B1	B2	B3	D1	D2	H1	H2
EADC-E16-60-E24	ELGD-BS-60	36.5	20	9.8	M6	9	163	150
EADC-E16-80-E24	ELGD-BS-80		20				183	170
EADC-E16-120-E24	ELGD-BS-120		20				203	190

		H3		H4	L1	L2	L3	L4	L5
		min.	min.						
EADC-E16-60-E24	ELGD-BS-60	101	113	30	100	60	25	30	40
EADC-E16-80-E24	ELGD-BS-80	121	133						
EADC-E16-120-E24	ELGD-BS-120	161	173						

Datasheet


Dimensions – Adjusting kit EADC-E15-...

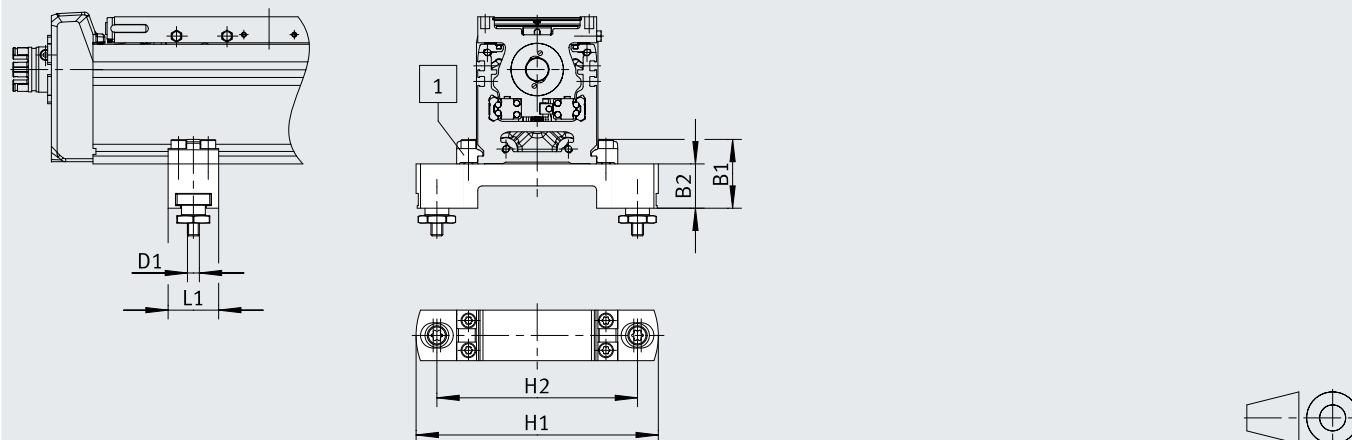Download CAD data → www.festo.com

[1] Profile mounting

		B1	B2	D1	H1	H2		L1
						min.	max.	
EADC-E15-60-E24	ELGD-BS-60	46.3	29.8	M8	143	110	120	34
EADC-E15-80-E24	ELGD-BS-80				163	130	140	

Dimensions – Mounting kit EAHM-E15-K-...

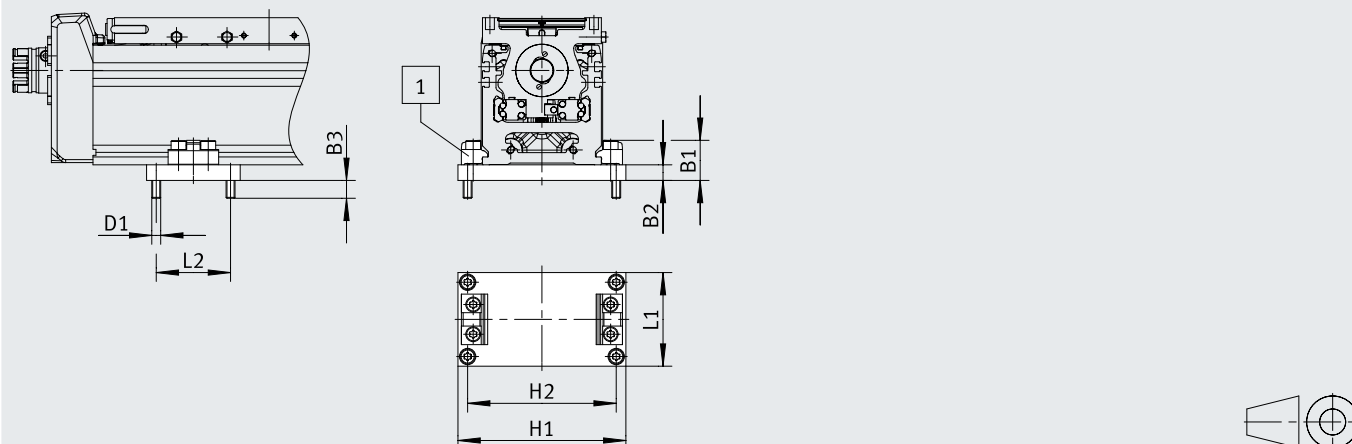
Download CAD data → www.festo.com

[1] Profile mounting

		B1	B2	B3	D1	H1	H2	L1	L2
EAHM-E15-K-60-E24	ELGD-BS-60	27	10.5	12	M6	93	80	63	50
EAHM-E15-K-80-E24	ELGD-BS-80					113	100		

Datasheet

Dimensions – Mounting kit EAHM-E24-AP-60

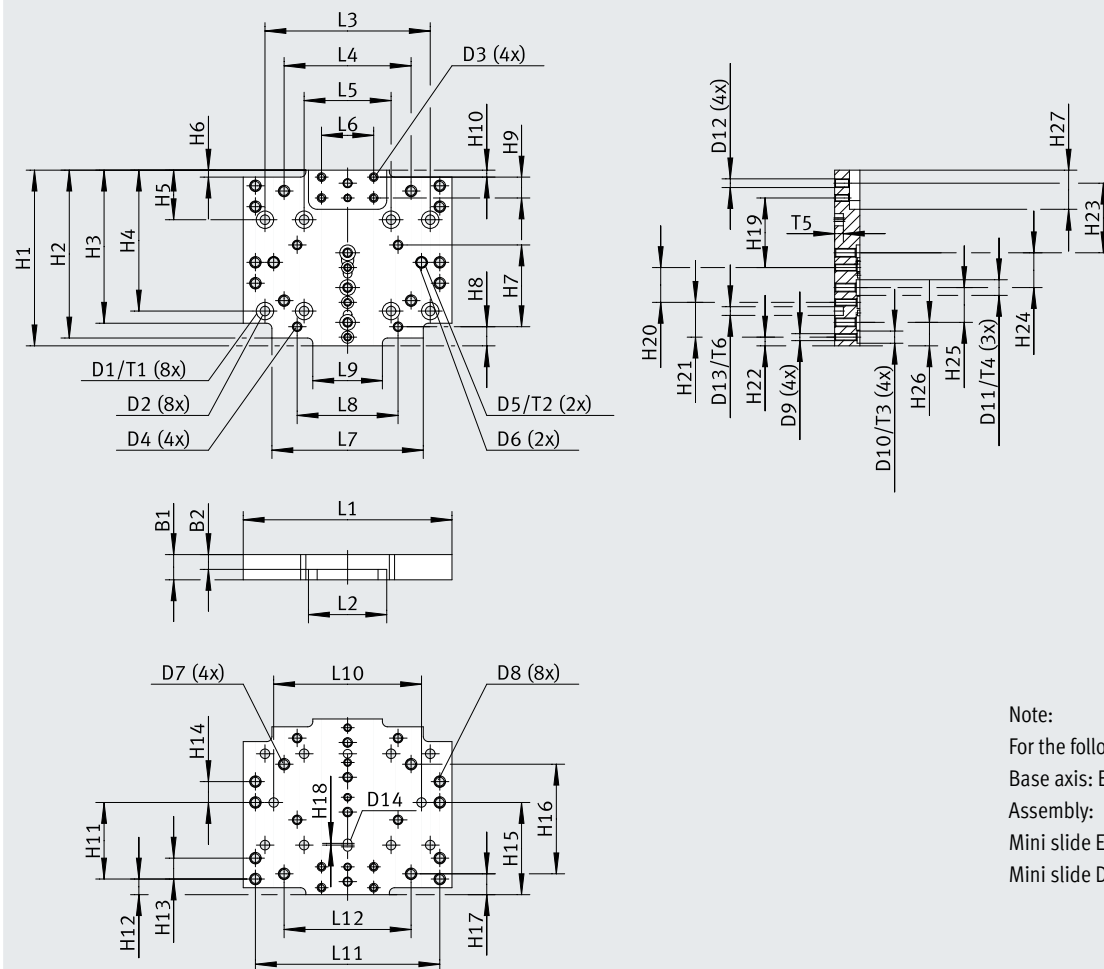Download CAD data → www.festo.com

Note:

For the following combinations:

Base axis: ELGD-BS-60-L

Assembly:

Mini slide EGSC-45/60

Mini slide DGST-12/16



		B1	B2	D1 ∅ H13	D2 ∅ H13	D3	D4	D5 ∅ H7	D6	D7	D8	D9	D10 ∅ H8	D11 ∅ H8	D12	D13 ∅ H8
EAHM-E24-AP-60	ELGD-BS-60-L	14.5	8.5	10	5.5	M4	M5	6	5.4	M6	M6	M4	7	9	M5	5


		D14	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14
EAHM-E24-AP-60	ELGD-BS-60-L	5	101	96.5	88	81	28.5	4	47	11	12	4	44	9	12	12

		H15	H16	H17	H18	H19	H20	H21	H22	H23	H24	H25	H26	H27	L1	L2
EAHM-E24-AP-60	ELGD-BS-60-L	53	63	12	1	40	20	20	5	40	20	20	13.5	22.5	120	45

		L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	T1	T2	T3	T4	T5	T6
EAHM-E24-AP-60	ELGD-BS-60-L	95	73	50	30	87	58	40	85	106	73	7.9	7.7	1.6	2.1	5	5

Datasheet

Dimensions – Mounting kit EAHM-E24-AP-80

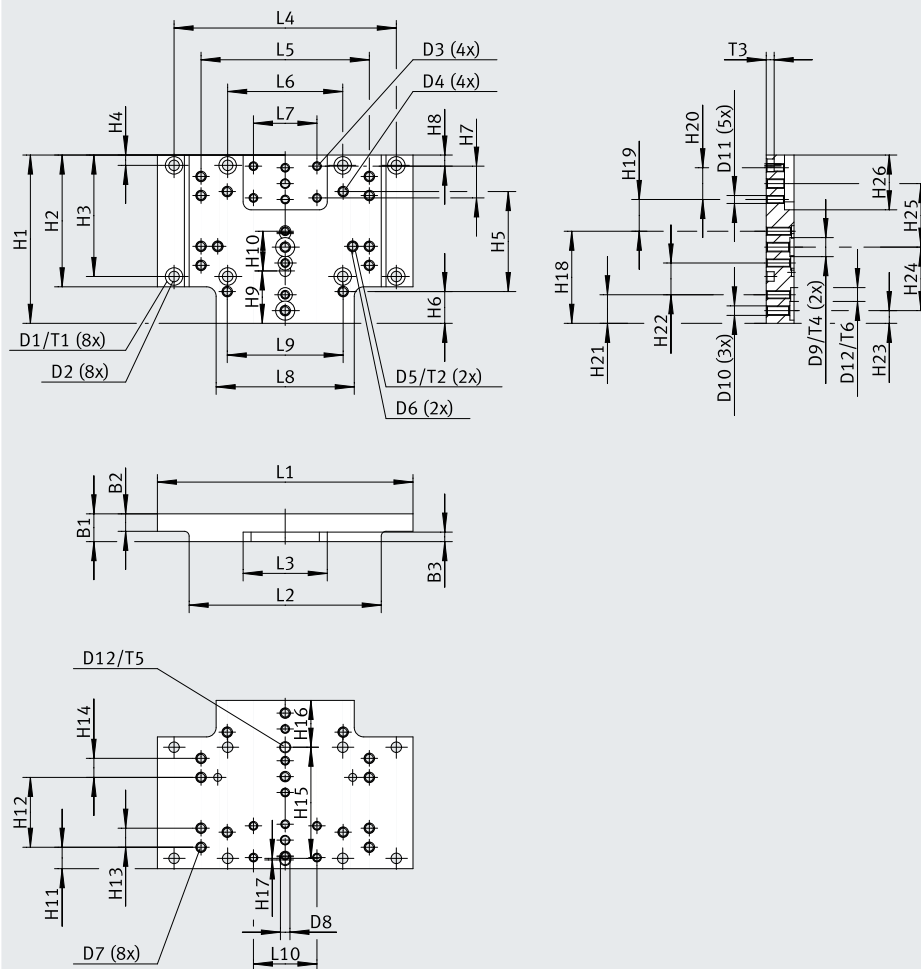Download CAD data → www.festo.com

Note:


For the following combinations:

Base axis: ELGD-BS-80-L

Assembly:

Mini slide EGSC-60

Mini slide DGST-16/20



		B1	B2	B3	D1 ∅ H13	D2 ∅ H13	D3	D4	D5 ∅ H7	D6 ∅	D7	D8	D9 ∅ H8	D10	D11	D12 ∅ H8
EAHM-E24-AP-80	ELGD-BS-80-L	17.5	11	6	11	6.6	M5	M6	6	5	M6	6	12	M6	M5	9


		H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15
EAHM-E24-AP-80	ELGD-BS-80-L	106	83	76.5	6.5	63	20	20	7	33	25	36.5	44	12	12	70

		H16	H17	H18	H19	H20	H21	H22	H23	H24	H25	H26	L1	L2	L3	L4
EAHM-E24-AP-80	ELGD-BS-80-L	29.5	1	58	20	20	18	20	8	40	40	34.5	161	121	53	140

		L5	L6	L7	L8	L9	L10	T1	T2	T3	T4	T5	T6
EAHM-E24-AP-80	ELGD-BS-80-L	106	72.5	40	87	73	40	13	7.7	5	2.6	5	2.1

Datasheet

Dimensions – Mounting kit EAHM-E24-AP-120

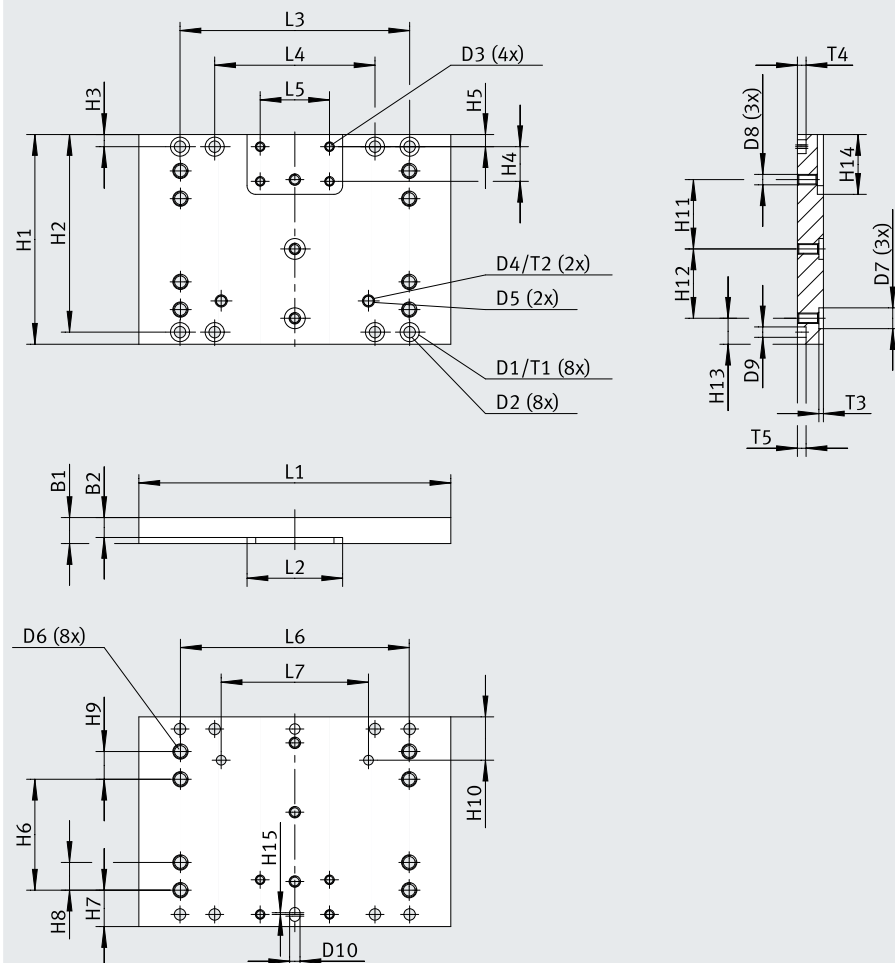Download CAD data → www.festo.com

Note:

For the following combinations:

Base axis: ELGD-BS-120-L

Assembly:

Mini slide DGST-20/25



		B1	B2	D1 Ø H13	D2 Ø H13	D3	D4 Ø H7	D5 Ø	D6	D7 Ø H8	D8	D9 Ø H8	D10	H1
EAHM-E24-AP-120	ELGD-BS-120-L	15	11.5	11	6.6	M5	6	5.6	M8	12	M6	6	6	121

		H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14
EAHM-E24-AP-120	ELGD-BS-120-L	114	7	20	7	64	21	16	16	25	40	40	15	34.5





		L1	L2	L3	L4	L5	L6	L7	T1	T2	T3	T4	T5
			+0.5										
EAHM-E24-AP-120	ELGD-BS-120-L	180	55.2	132.5	92.5	40	132	85	6.5	5	2.6	5	5

Datasheet

Dimensions – Angle kit EHAM-AK-E24-80-E24-60-ML-L

Download CAD data → www.festo.com

Sample illustration:

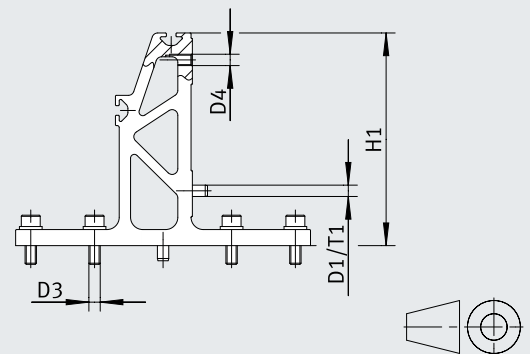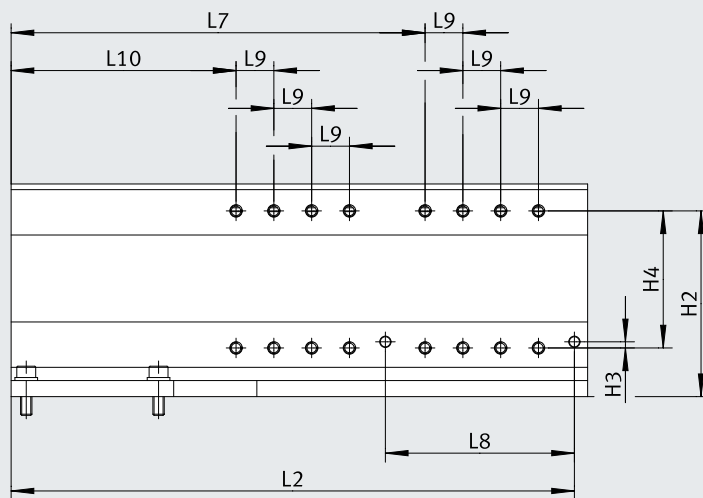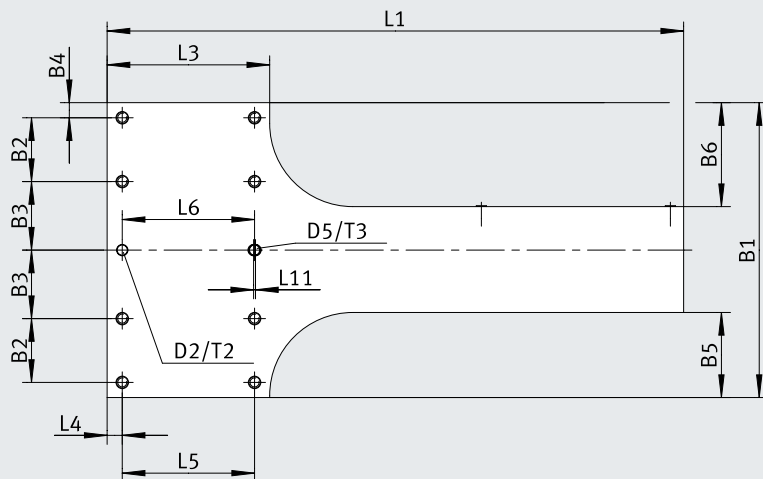

Note:

- Suitable for a cantilever design.
- Mounting position: left
- The profile mountings EAHF-E24-60-P-B4 are provided for mounting an ELGD axis onto the angle kit.

For the following combinations:

Base axis: ELGD-BS-80-L, ELGD-TB-80-L

Assembly axis ELGD-BS-60



		B1	B2	B3	B4	B5	B6	D1 Ø	D2 Ø	D3 Ø	D4
EHAM-AK-E24-80-E24-60-ML-L	ELGD-BS-80-L	156	33.8	36.3	8	45	55	6	6	6.6	M6
		D5	H1	H2	H3	H4	L1	L2	L3	L4	L5
EHAM-AK-E24-80-E24-60-ML-L	ELGD-BS-80-L	6	112.5	98.3	3.3	72.5	305	298	86	8	70
		L6	L7	L8	L9	L10	L11	T1	T2	T3	
EHAM-AK-E24-80-E24-60-ML-L	ELGD-BS-80-L	69.5	219	100	20	119	1	6	5.5	5.5	

Datasheet

Dimensions – Angle kit EHAM-AK-E24-80-E24-60-MR-L

Download CAD data → www.festo.com

Sample illustration:

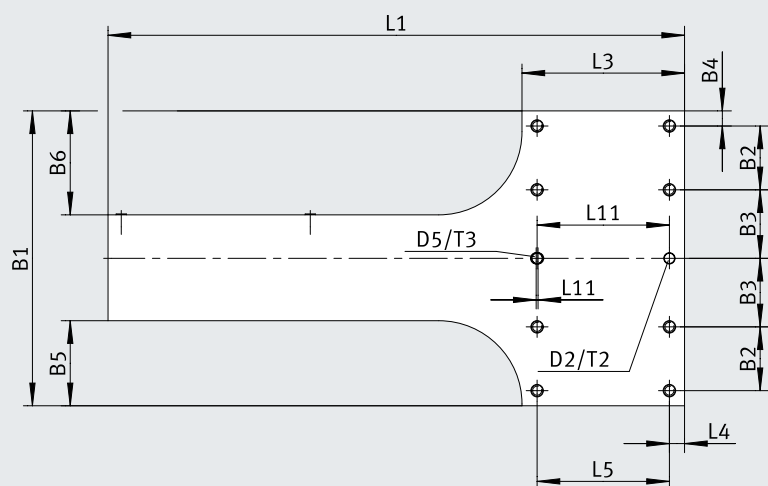




Note:

- Suitable for a cantilever design.
- Mounting position: right
- The profile mountings EAHF-E24-60-P-B4 are provided for mounting an ELGD axis onto the angle kit.

For the following combinations:

Base axis: ELGD-BS-80-L, ELGD-TB-80-L

Assembly axis ELGD-BS-60

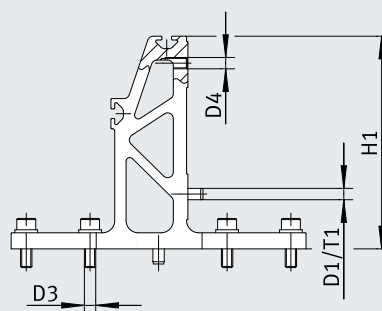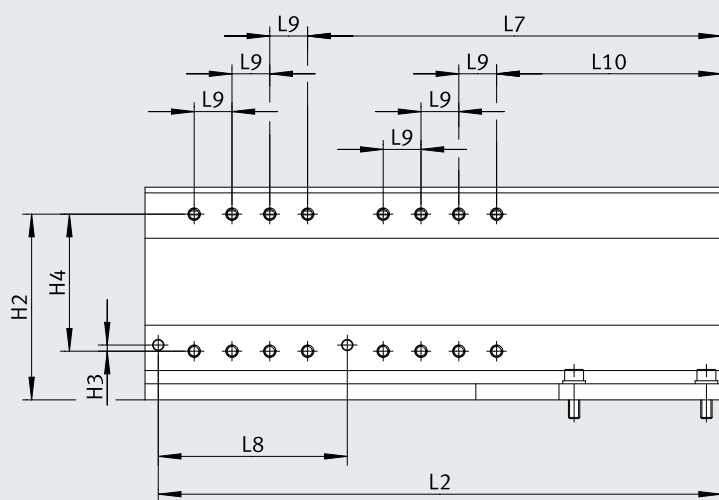

		B1	B2	B3	B4	B5	B6	D1 Ø	D2 Ø	D3 Ø	D4
EHAM-AK-E24-80-E24-60-MR-L	ELGD-BS-80-L	156	33.8	36.3	8	45	55	6	6	6.6	M6

		D5	H1	H2	H3	H4	L1	L2	L3	L4	L5
EHAM-AK-E24-80-E24-60-MR-L	ELGD-BS-80-L	6	112.5	98.3	3.3	72.5	305	298	86	8	70



		L6	L7	L8	L9	L10	L11	T1	T2	T3
EHAM-AK-E24-80-E24-60-MR-L	ELGD-BS-80-L	69.5	219	100	20	119	1	6	5.5	5.5

Datasheet

Dimensions – Angle kit EHAM-AK-E24-80-E24-80-ML-S

Download CAD data → www.festo.com

Sample illustration:

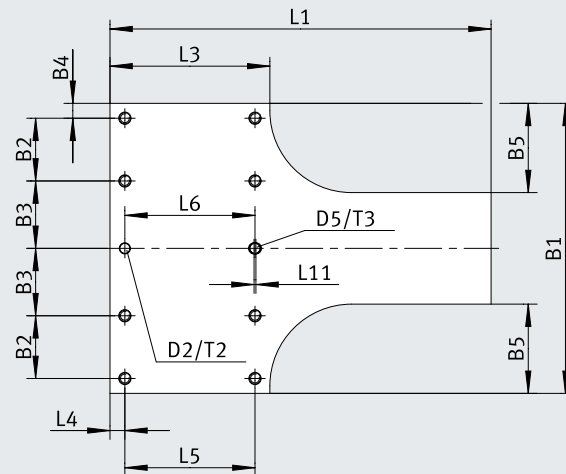





Note:

- Suitable for a three-dimensional gantry design.
- Mounting position: left
- The profile mountings EAHF-E24-60-P-B4 are provided for mounting an ELGD axis onto the angle kit.

For the following combinations:

Base axis: ELGD-BS-80-L, ELGD-TB-80-L

Assembly axis: ELGD-BS-80, ELGD-TB-80, ELGD-BS-WD-100, ELGD-TB-WD-100, ELGD-BS-WD-120, ELGD-TB-WD-120

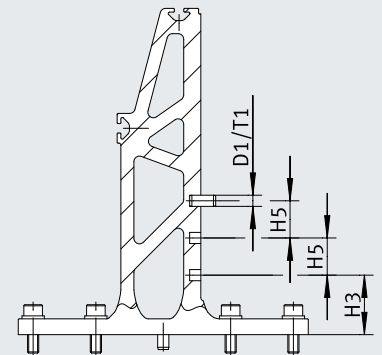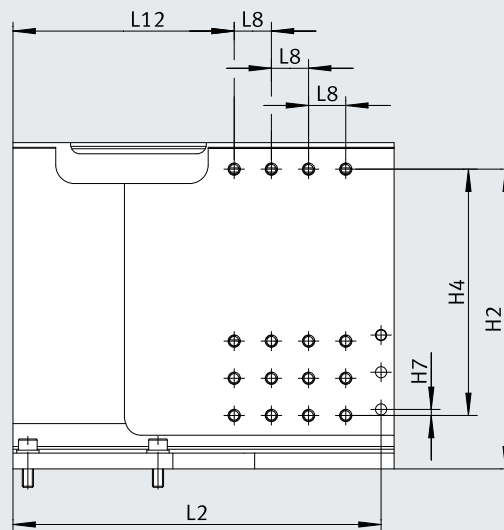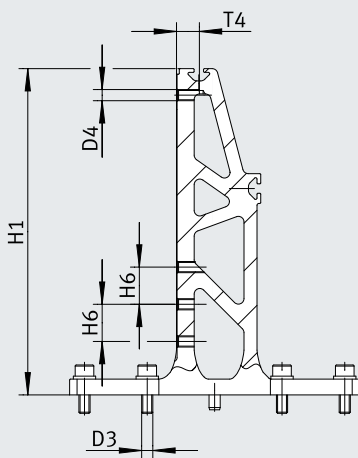



		B1	B2	B3	B4	B5	D1 ø	D2 ø	D3 ø	D4	D5
EHAM-AK-E24-80-E24-80-ML-S	ELGD-BS-80-L	156	33.8	36.3	8	45	6	6	6.6	M6	6
		H1	H2	H3	H4	H5	H6	H7	L1	L2	L3
EHAM-AK-E24-80-E24-80-ML-S	ELGD-BS-80-L	175.5	161.3	32	132.5	20	20	3.3	205	198	86
		L4	L5	L6	L8	L11	L12	T1	T2	T3	T4
EHAM-AK-E24-80-E24-80-ML-S	ELGD-BS-80-L	8	70	69.5	20	1	119	6	5.5	5.5	14.3

Datasheet

Dimensions – Angle kit EHAM-AK-E24-80-E24-80-MR-S

Download CAD data → www.festo.com

Sample illustration:

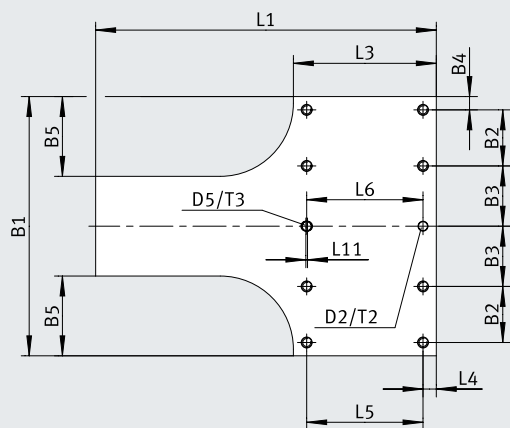


- Note:
- Suitable for a three-dimensional gantry design.
 - Mounting position: right
 - The profile mountings EAHF-E24-60-P-B4 are provided for mounting an ELGD axis onto the angle kit.

For the following combinations:

Base axis: ELGD-BS-80-L, ELGD-TB-80-L

Assembly: ELGD-BS-80, ELGD-TB-80, ELGD-BS-WD-100, ELGD-TB-WD-100, ELGD-BS-WD-120, ELGD-TB-WD-120

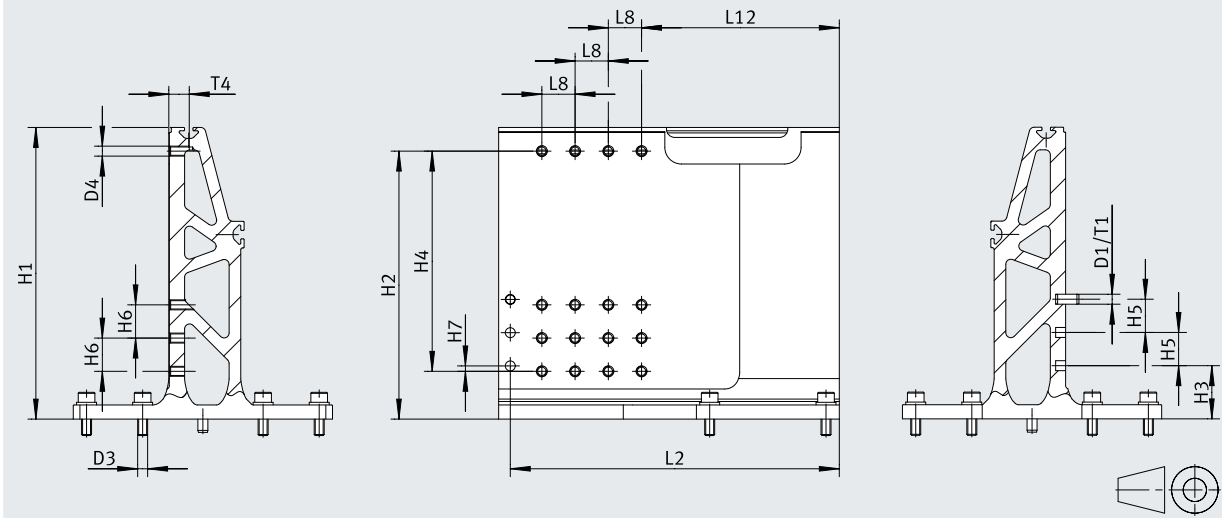

		B1	B2	B3	B4	B5	D1 ø	D2 ø	D3 ø	D4	D5
EHAM-AK-E24-80-E24-80-MR-S	ELGD-BS-80-L	156	33.8	36.3	8	45	6	6	6.6	M6	6

		H1	H2	H3	H4	H5	H6	H7	L1	L2	L3
EHAM-AK-E24-80-E24-80-MR-S	ELGD-BS-80-L	175.5	161.3	32	132.5	20	20	3.3	205	198	86

		L4	L5	L6	L8	L11	L12	T1	T2	T3	T4
EHAM-AK-E24-80-E24-80-MR-S	ELGD-BS-80-L	8	70	69.5	20	1	119	6	5.5	5.5	14.3




Datasheet

Dimensions – Profile mounting EAHF-E24-60-P-B4

Download CAD data → www.festo.com

Note:


The profile mounting EAHF-E24-60-P-B4 is intended for mounting an ELGD axis onto angle kit EHAM-AK-E24-...

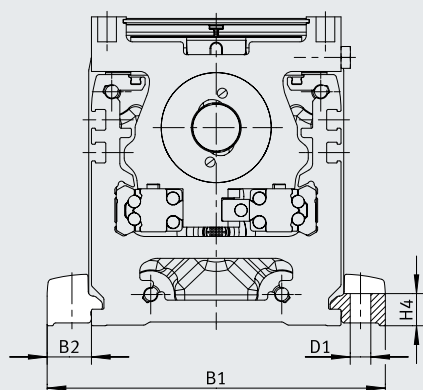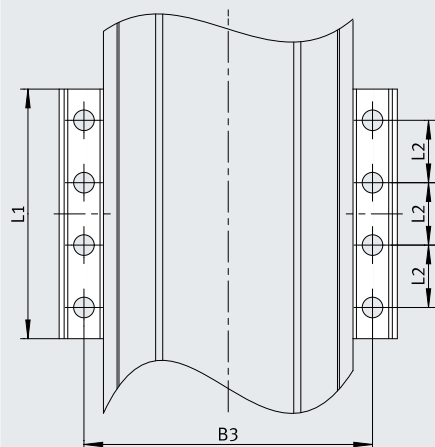

		B1	B2	B3	D1 Ø H13	H4 ±0.1	H5	L1	L2
EAHF-E24-60-P-B4	ELGD-BS-60	88.4	14.2	72.5	6.6	10.3	16.5	80	20
	ELGD-BS-80	108.4	14.2	92.5	6.6	10.3	16.5	80	20

Datasheet

Dimensions – Switch lug EAPM-E24-60-SLS
 Download CAD data → www.festo.com

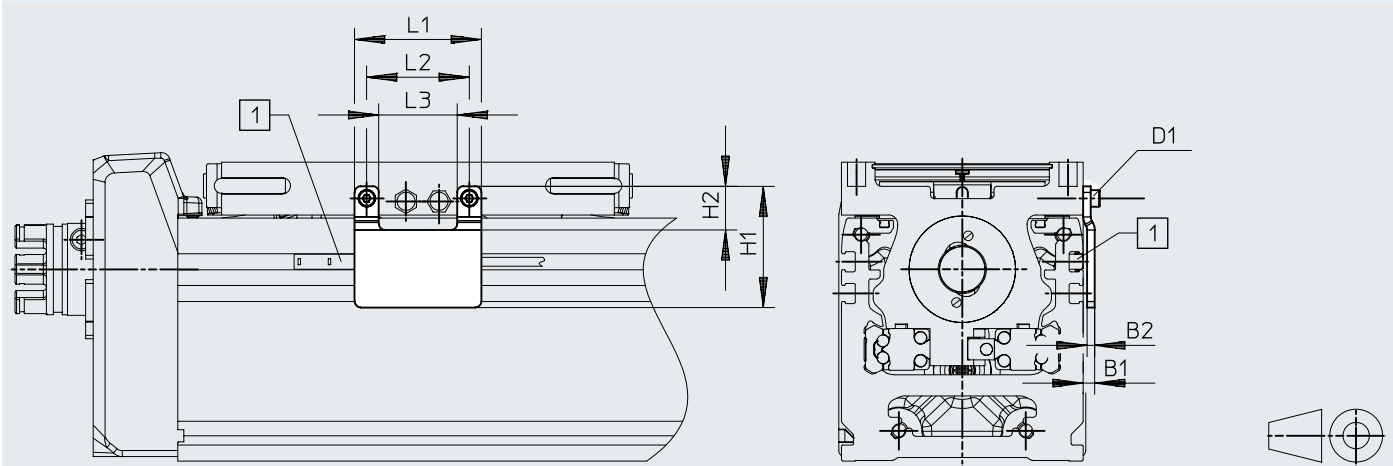


[1] Sensor slot for proximity switch SIES-8M

		B1	B2	D1	H1	H2	L1	L2	L3
EAPM-E24-60-SLS	ELGD-BS-60	3.5	2.5	M3	40.2	14.5	42	34	26
	ELGD-BS-80								
	ELGD-BS-120								

Datasheet

Dimensions – Switch lug EAPM-E24-...-SLE

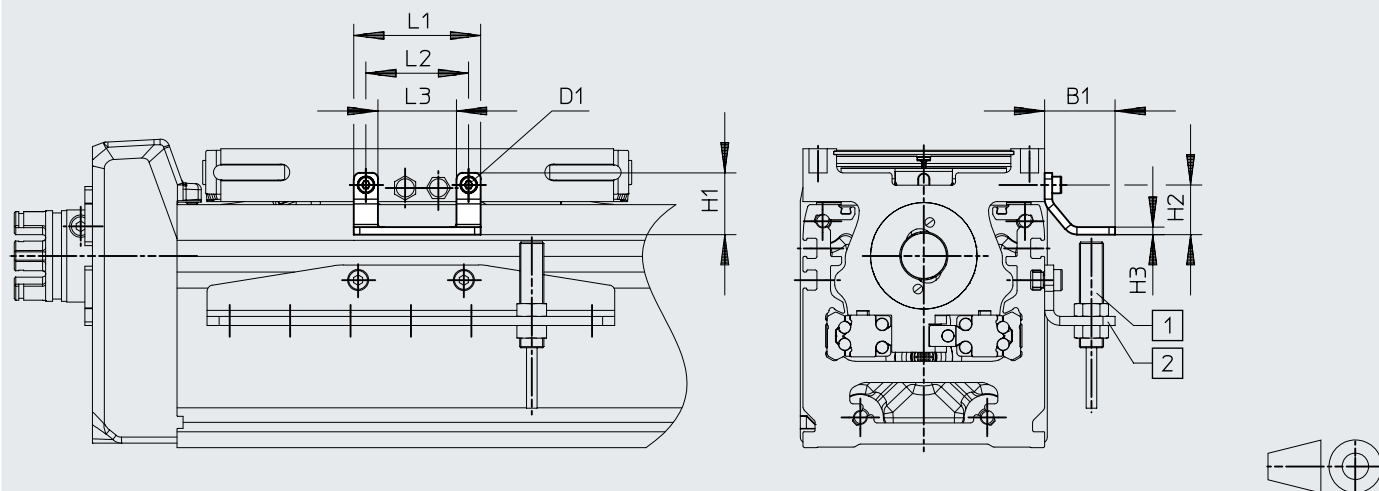Download CAD data → www.festo.com

[1] Proximity switch SIEN-M8


[2] Sensor bracket EAPM-E24-60-SHE

		B1	D1	H1	H2	H3	L1	L2	L3
EAPM-E24-60-SLE	ELGD-BS-60	23.4	M3	20.5	16.5	2.5	42	34	26
	ELGD-BS-80								
	ELGD-BS-120								

Datasheet

Dimensions – Sensor bracket EAPM-E24-60-SHE

Download CAD data → www.festo.com

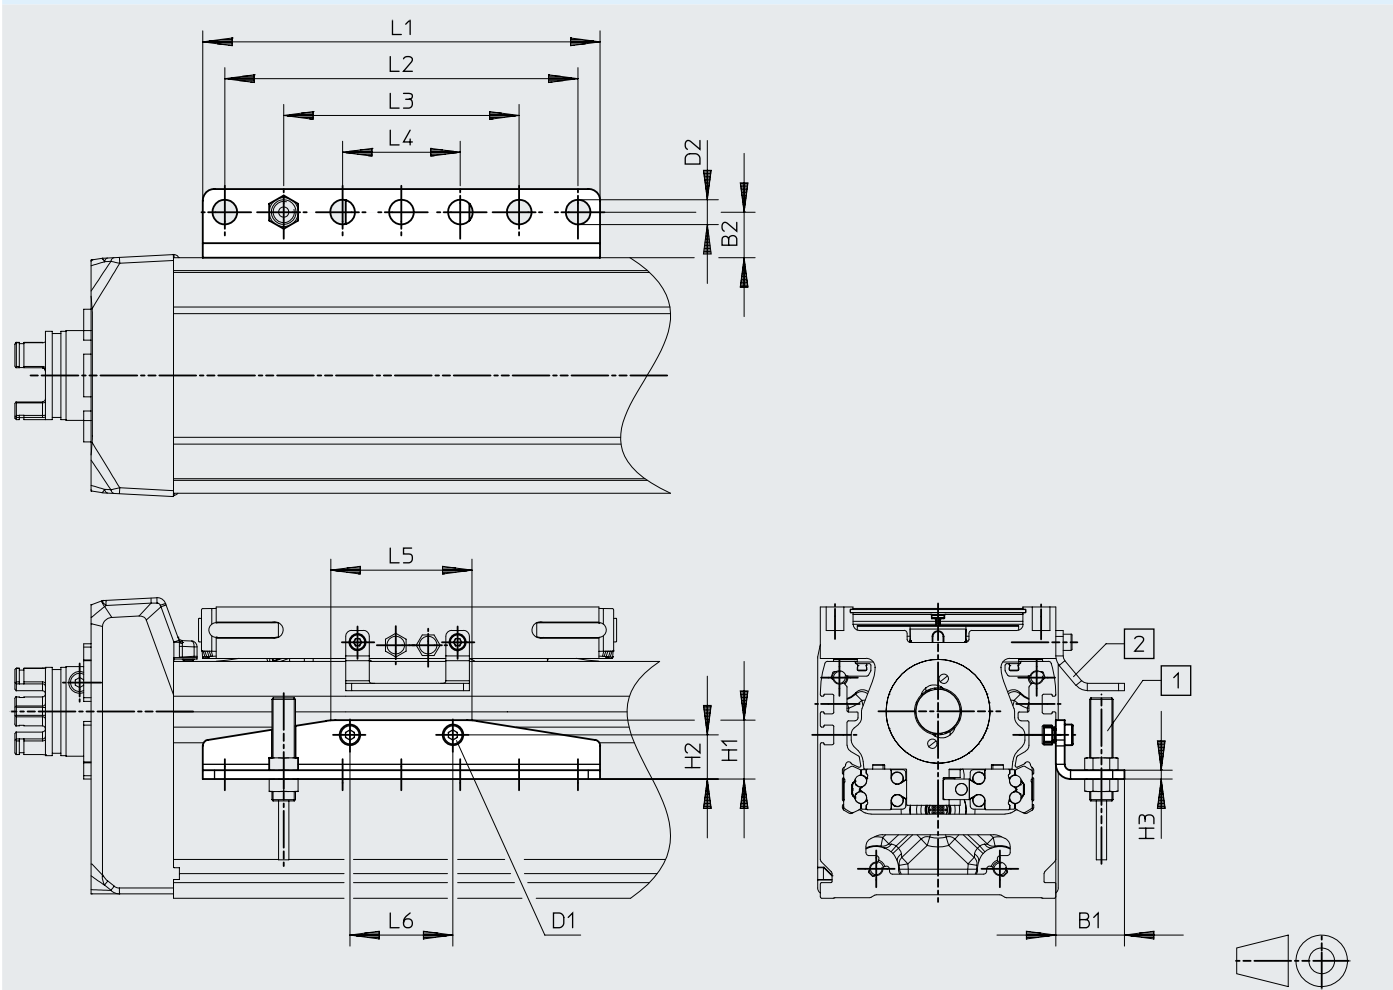


- [1] Proximity switch SIEN-8M
- [2] Switch lug EAPM-E24-60-SLE

		B1	B2	D1	D2 Ø H13	H1	H2	H3
EAPM-E24-60-SHE	ELGD-BS-60	23.4	15.5	M4	8.4	20	15	3
	ELGD-BS-80							
	ELGD-BS-120							

		L1	L2	L3	L4	L5	L6
EAPM-E24-60-SHE		135	120	80	40	48	35
	ELGD-BS-120						

Datasheet

Dimensions – Sensor bracket EAPM-E24-60-SHO

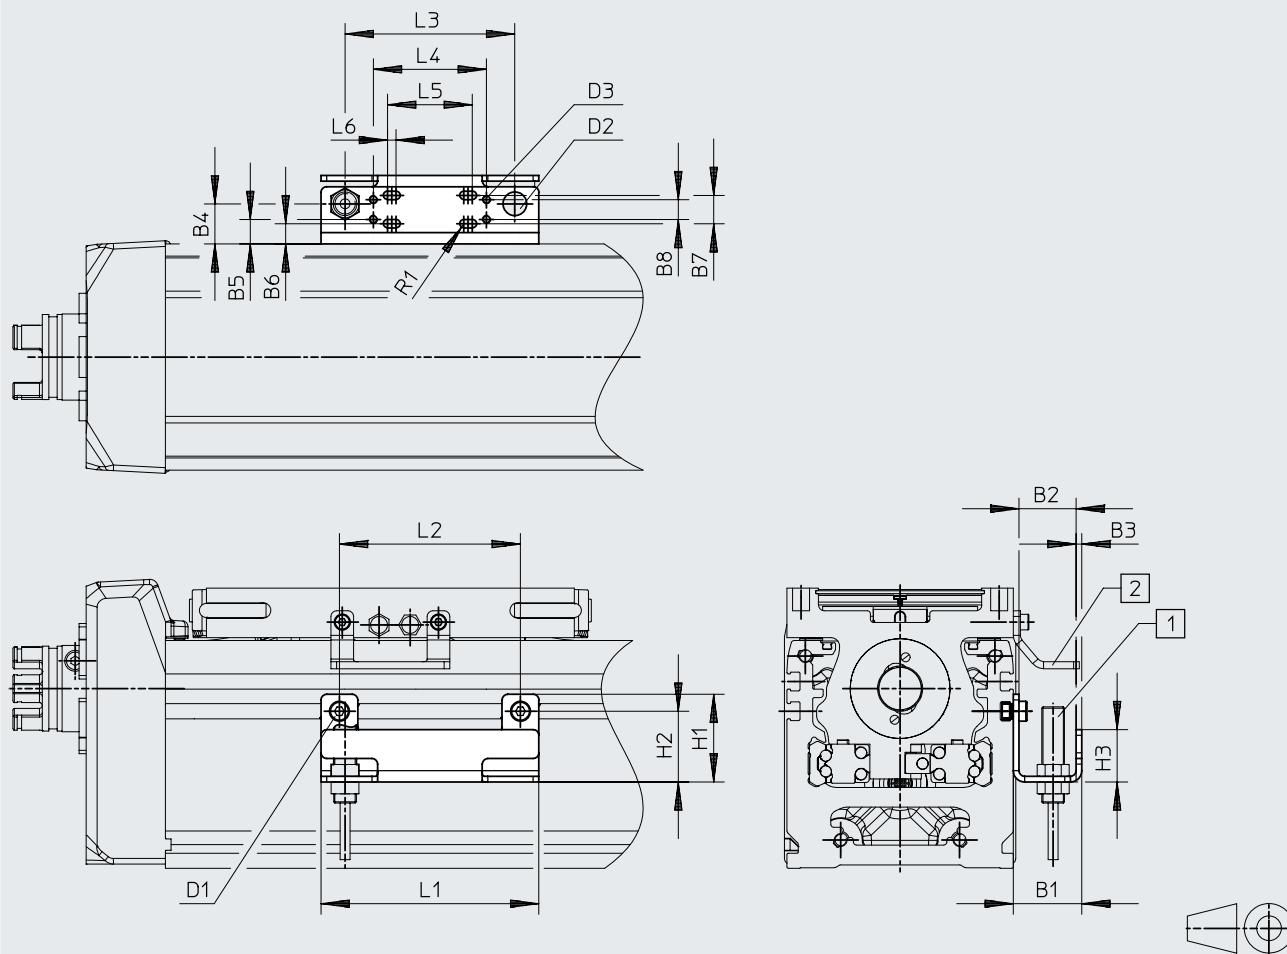Download CAD data → www.festo.com


- [1] Inductive sensor M8
 [2] Switch lug EAPM-E24-60-SLE

		B1	B2	B3	B4	B5	B6	B7
EAPM-E24-60-SHO	ELGD-BS-60	24.2	20.2	2	14.1	8.6	7.1	10
	ELGD-BS-80							
	ELGD-BS-120							
		B8	D1	D2 Ø	D3	H1	H2	H3
EAPM-E24-60-SHO	ELGD-BS-60	7	M3	8.4	M3	31	25	18.5
	ELGD-BS-80							
	ELGD-BS-120							
		L1	L2	L3	L4	L5	L6	R1
EAPM-E24-60-SHO	ELGD-BS-60	77	64	60	40	24	3	1.5
	ELGD-BS-80							
	ELGD-BS-120							

Datasheet

Dimensions – ELGD-...-M3 with incremental displacement encoder


Download CAD data → www.festo.com

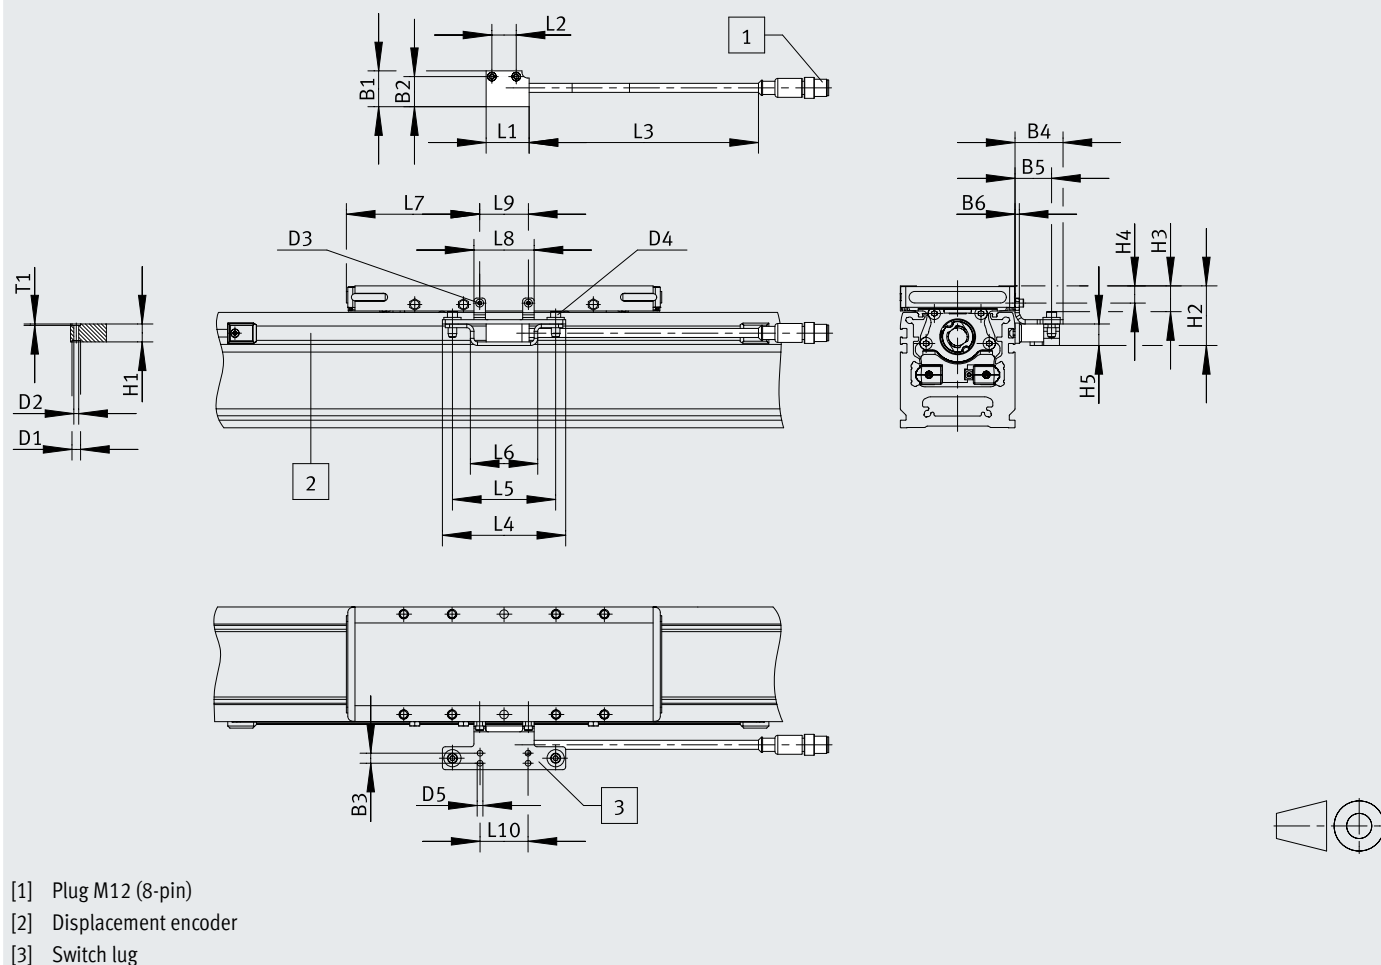


Datasheet

	B1	B2	B3	B4	B5	B6	D1 ø
ELGD-BS-60	25	21	7	33.5	25.5	3	6
ELGD-BS-80							
ELGD-BS-120							
	D2 ø	D3	D4	D5 ø	H1 ±0.1	H2	H3
ELGD-BS-60	3.4	M2	M4	4	12.5	40.6	17
ELGD-BS-100						41.6	18
ELGD-BS-120						42.6	19
	H4	H5	L1	L2	L3	L4	L5
ELGD-BS-60	11	15	30	17	160	86	72
ELGD-BS-100	12						
ELGD-BS-120	13						
	L6	L7 ELGD-...	L7 ELGD-...L	L8	L9	L10	T1
ELGD-BS-60	47	42	62.5	42	34	33.5	1
ELGD-BS-100		54	93				
ELGD-BS-120		64	114.5				

Datasheet


Ordering data	Size	Screw pitch [mm]	Stroke [mm]	Part no.	Type
	60	5	100	8192253	ELGD-BS-KF-60-100-0H-5P
			200	8192254	ELGD-BS-KF-60-200-0H-5P
			300	8192255	ELGD-BS-KF-60-300-0H-5P
			400	8192256	ELGD-BS-KF-60-400-0H-5P
			500	8192257	ELGD-BS-KF-60-500-0H-5P
			600	8192258	ELGD-BS-KF-60-600-0H-5P
			800	8192259	ELGD-BS-KF-60-800-0H-5P
		10	100	8192260	ELGD-BS-KF-60-100-0H-10P
			200	8192261	ELGD-BS-KF-60-200-0H-10P
			300	8192262	ELGD-BS-KF-60-300-0H-10P
			400	8192263	ELGD-BS-KF-60-400-0H-10P
			500	8192264	ELGD-BS-KF-60-500-0H-10P
			600	8192265	ELGD-BS-KF-60-600-0H-10P
			800	8192266	ELGD-BS-KF-60-800-0H-10P
	80	5	100	8192267	ELGD-BS-KF-80-100-0H-5P
			200	8192268	ELGD-BS-KF-80-200-0H-5P
			300	8192269	ELGD-BS-KF-80-300-0H-5P
			400	8192270	ELGD-BS-KF-80-400-0H-5P
			500	8192271	ELGD-BS-KF-80-500-0H-5P
			600	8192272	ELGD-BS-KF-80-600-0H-5P
			800	8192273	ELGD-BS-KF-80-800-0H-5P
			1000	8192274	ELGD-BS-KF-80-1000-0H-5P
		10	100	8192275	ELGD-BS-KF-80-100-0H-10P
			200	8192276	ELGD-BS-KF-80-200-0H-10P
			300	8192277	ELGD-BS-KF-80-300-0H-10P
			400	8192278	ELGD-BS-KF-80-400-0H-10P
			500	8192279	ELGD-BS-KF-80-500-0H-10P
			600	8192280	ELGD-BS-KF-80-600-0H-10P
			800	8192281	ELGD-BS-KF-80-800-0H-10P
			1000	8192282	ELGD-BS-KF-80-1000-0H-10P
		20	100	8192283	ELGD-BS-KF-80-100-0H-20P
			200	8192284	ELGD-BS-KF-80-200-0H-20P
			300	8192285	ELGD-BS-KF-80-300-0H-20P
			400	8192286	ELGD-BS-KF-80-400-0H-20P
			500	8192287	ELGD-BS-KF-80-500-0H-20P
			600	8192288	ELGD-BS-KF-80-600-0H-20P
			800	8192289	ELGD-BS-KF-80-800-0H-20P
			1000	8192290	ELGD-BS-KF-80-1000-0H-20P

Datasheet

Ordering data					
	Size	Screw pitch [mm]	Stroke [mm]	Part no.	Type
	120	5	200	8192291	ELGD-BS-KF-120-200-0H-5P
			300	8192292	ELGD-BS-KF-120-300-0H-5P
			400	8192293	ELGD-BS-KF-120-400-0H-5P
			500	8192294	ELGD-BS-KF-120-500-0H-5P
			600	8192295	ELGD-BS-KF-120-600-0H-5P
			800	8192296	ELGD-BS-KF-120-800-0H-5P
			1000	8192297	ELGD-BS-KF-120-1000-0H-5P
		10	200	8192298	ELGD-BS-KF-120-200-0H-10P
			300	8192299	ELGD-BS-KF-120-300-0H-10P
			400	8192300	ELGD-BS-KF-120-400-0H-10P
			500	8192301	ELGD-BS-KF-120-500-0H-10P
			600	8192302	ELGD-BS-KF-120-600-0H-10P
			800	8192303	ELGD-BS-KF-120-800-0H-10P
			1000	8192304	ELGD-BS-KF-120-1000-0H-10P
		30	200	8192305	ELGD-BS-KF-120-200-0H-30P
			300	8192306	ELGD-BS-KF-120-300-0H-30P
			400	8192307	ELGD-BS-KF-120-400-0H-30P
			500	8192308	ELGD-BS-KF-120-500-0H-30P
			600	8192309	ELGD-BS-KF-120-600-0H-30P
			800	8192310	ELGD-BS-KF-120-800-0H-30P
			1000	8192311	ELGD-BS-KF-120-1000-0H-30P

Ordering data – Modular product system					More information → elgd-bs
	Size	Stroke [mm]	Part no.	Type	
	60	50 ... 1000	8176874	ELGD-BS-KF-60-...	
	80	50 ... 2000	8176875	ELGD-BS-KF-80-...	
	120	50 ... 2500	8176876	ELGD-BS-KF-120-...	

Peripherals overview

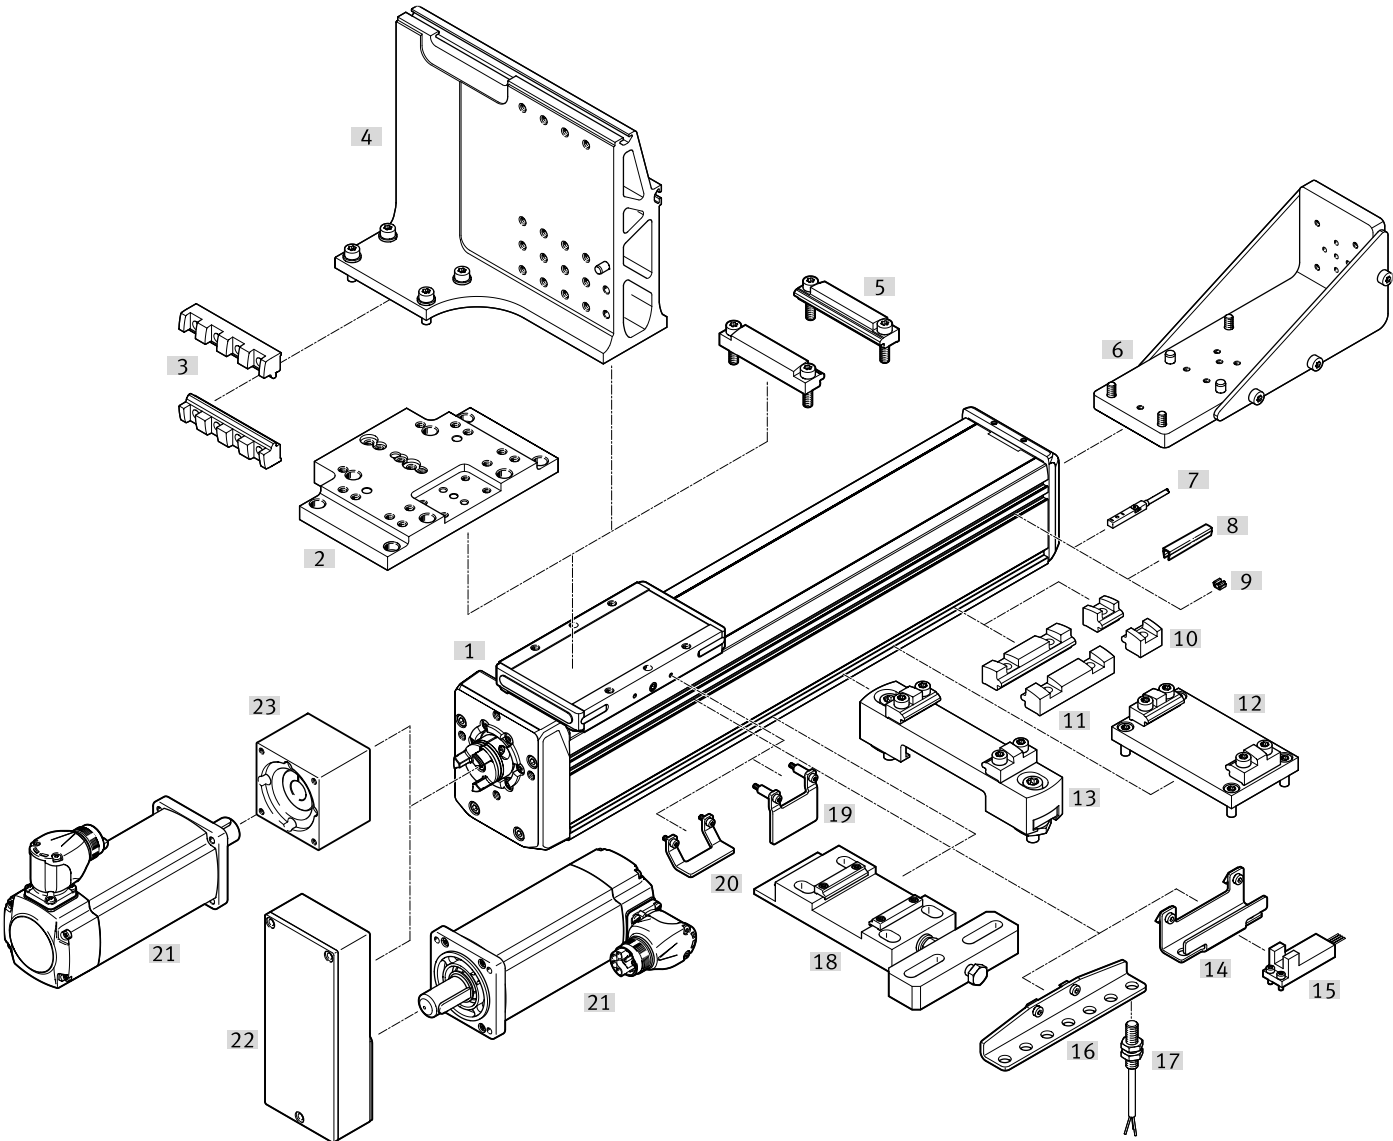


Peripherals overview

Accessories			
	Type	Description	→ Page/Internet
[1]	Ball screw axis ELGD-BS	Electric drive	elgd-bs
[2]	Mounting kit EAHM-E...-AP	for mounting mini slide DGST or EGSC on the slide	55
[3]	Profile mounting EAHF-E24-60-P-B4	The profile mounting EAHF-E24-60-P-B4 is designed for mounting an ELGD axis onto the angle kit EHAM-AK-E24-...	54
[4]	Angle kit EHAM-AK-E24	• Suitable for a cantilever or three-dimensional gantry design • The profile mountings EAHF-E24-60-P-B4 are provided for mounting an ELGD axis onto the angle kit • When used in combination with the angle kit, the axis with a long slide must be selected	55
[5]	Profile mounting EAHF-E24-...-D...	For axis/axis mounting with adapter plate	54
[6]	Angle kit EAHM-E24-AK	• Attachments can be mounted on the front of the axis using the feature front-end mounting "ELGD-...-M7" together with the angle kit. Threads are therefore integrated in the underside of the profile on the side facing away from the motor, which makes for stable front-end mounting	55
[7]	Proximity switch, T-slot SIES-8M	Inductive proximity switch, for T-slot	56
[8]	Slot cover ABP-S	For protection against contamination	57
[9]	Clip SMBK	For mounting the proximity switch cable in the slot	57
[10]	Profile mounting EAHF-E24-...-S	For mounting the axis on the side of the profile	54
[11]	Profile mounting EAHF-E24-...	For mounting the axis on the side of the profile (standard mounting)	54
[12]	Mounting kit EAHM-E15-K	For mounting the axis on the side of the profile	55
[13]	Adjusting kit EADC-E15	Height-adjustable. Can be used to easily compensate for any unevenness in the bearing surface	55
[14]	Sensor bracket EAPM-E24-SHO	For mounting third-party sensors on the axis	56
[15]	Sensor OMRON	Third-party sensor OMRON, EE-SX674 series	–
[16]	Sensor bracket EAPM-E24-SHE	For mounting the inductive proximity switches SIEN-M8 (round design) on the axis	56
[17]	Proximity switch, M8 SIEN-M8	Inductive proximity switch, round design	57
[18]	Adjusting kit EADC-E16	For mounting the axis on a vertical surface. Once mounted, the axis can be aligned horizontally	55
[19]	Switch lug EAPM-E24-SLS	For sensing the slide position using inductive proximity switch SIES-8M or for optical sensors (Omron) with sensor bracket EAPM-E24-SHO	56
[20]	Switch lug EAPM-E24-SLE	For sensing the slide position using inductive proximity switch SIEN-M8 (round design) and sensor bracket EAPM-E24-SHE	56
[21]	Motor EMMT	Motors and kits specially matched with the axis Detailed information: www.festo.com/catalogue/eamm Engineering tool: www.festo.com/x/electric-motion-sizing	emmt
[22]	Parallel kit EAMM	For parallel motor mounting	eammm-u
[23]	Axial kit EAMM	For axial motor mounting	eammm-a

Accessories

Permitted axis/motor combinations for axial and parallel kits




Under the following links you will find all the information about:

- Axis/motor combinations
- Permitted third-party motors
- Technical data
- Dimensions


For axial kits → Internet: [eamm-a](#)

For parallel kits → Internet: [eamm-u](#)


Profile mounting EAHF-E24-...-P-S

	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120, WD-100, WD-120	F1a	Anodised wrought aluminium alloy	18 g	8197128	EAHF-E24-60-P-S

Profile mounting EAHF-E24-...-P (standard mounting)


	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120, WD-100, WD-120	F1a	Anodised wrought aluminium alloy	71 g	8197132	EAHF-E24-60-P

Profile mounting EAHF-E24-...-P-D...


	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	ELGD-60 on ELGD-60-L ¹⁾	F1a	Anodised wrought aluminium alloy	87 g	8197131	EAHF-E24-60-P-D5
	ELGD-60 on ELGD-80			119 g	8197129	EAHF-E24-60-P-D4
	ELGD-60 on ELGD-WD-100-L ¹⁾			133 g	8197130	EAHF-E24-60-P-D6
	ELGD-80 on ELGD-WD-100-L			133 g	8197130	EAHF-E24-60-P-D6
	ELGD-80 on ELGD-120-L			165 g	8229954	EAHF-E24-60-P-D7
	ELGD-WD-100-L on ELGD-120-L			165 g	8229954	EAHF-E24-60-P-D7

1) With these combinations, the axis is mounted off-centre on the slide (see dimension L13 on the dimensional drawing with long slide).

Profile mounting EAHF-E24-60-P-B4


	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120, WD-100, WD-120	F1a	Anodised wrought aluminium alloy	72 g	8226570	EAHF-E24-60-P-B4


Accessories


Mounting kit EAHM-E15-K					
	Description	Adapter plate material	Product weight	Part no.	Type
	For size 60	Anodised aluminium	242 g	8234422	EAHM-E15-K-60-E24
	For size 80	Anodised aluminium	277 g	8234423	EAHM-E15-K-80-E24


Adjusting kit EADC-E15							
	Description	Adapter plate material	Product weight	Part no.	Type		
	For size 60	Anodised wrought aluminium alloy	377 g	8234417	EADC-E15-60-E24		
For size 80	Anodised wrought aluminium alloy	466 g	8234418	EADC-E15-80-E24			
Adjusting kit EADC-E16							
	Description	Adapter plate material	Product weight	Part no.	Type		
	For size 60	Anodised wrought aluminium alloy	650 g	8234412	EADC-E16-60-E24		
For size 80	Anodised wrought aluminium alloy	715 g	8234413	EADC-E16-80-E24			
For size 120	Anodised wrought aluminium alloy	845 g	8234414	EADC-E16-120-E24			
Mounting kit EAHM-E...-AP							
	Description	For assembly	Adapter plate material	Product weight	Part no.	Type	
	For size 60	EGSC-45/60 DGST-12/16	Anodised aluminium	449 g	8238432	EAHM-E24-AP-60	
For size 80	EGSC-60 DGST-16/20	Anodised aluminium	722 g	8238433	EAHM-E24-AP-80		
For size 120	DGST-20/25	Anodised aluminium	887 g	8238435	EAHM-E26-AP-120		
Angle kit EAHM-E24-AK (in combination with mounting type for front end use M7)							
	Description	Adapter plate material	Product weight	Part no.	Type		
	For size 60	Anodised aluminium	722 g	8238029	EAHM-E24-AK-60		
For size 80	Anodised aluminium	1378 g	8238030	EAHM-E24-AK-80			
Angle kit EHAM-AK-E24							
	Description	For assembly	Mounting position	Adapter plate material	Product weight	Part no.	Type
	ELGD-60 on ELGD-80-L	Cantilever systems	Left	Anodised aluminium	2240 g	8240704	EHAM-AK-E24-80-E24-60-ML-L
Cantilever systems	Right	Anodised aluminium	2240 g	8240705	EHAM-AK-E24-80-E24-60-MR-L		
ELGD-80, ELGD-WD-100, ELGD-WD-120 on ELGD-80-L	Three-dimensional gantry	Left	Anodised aluminium	2580 g	8240706	EHAM-AK-E24-80-E24-80-ML-S	
Three-dimensional gantry	Right	Anodised aluminium	2580 g	8240707	EHAM-AK-E24-80-E24-80-MR-S		



Accessories

Switch lug EAPM-E24-...-SLS						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120	F1a	Steel	32 g	8197117	EAPM-E24-60-SLS

Switch lug EAPM-E24-...-SLE						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120	F1a	Steel	20 g	8197116	EAPM-E24-60-SLE

Sensor bracket EAPM-E24-...-SHE						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120	F1a	Steel	103 g	8197123	EAPM-E24-60-SHE

Sensor bracket EAPM-E24-...-SHO						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120	F1a	Steel	67 g	8197121	EAPM-E24-60-SHO


Proximity switch for T-slot, inductive						Datasheets → Internet: sies
	Type of mounting	Switching out-put	Electrical connection	Cable length [m]	Part no.	Type
N/O						
	Inserted in the slot from above, flush with the cylinder profile	PNP	Cable, 3-core	7.5	551386	SIES-8M-PS-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551387	SIES-8M-PS-24V-K-0.3-M8D
		NPN	Cable, 3-core	7.5	551396	SIES-8M-NS-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551397	SIES-8M-NS-24V-K-0.3-M8D
N/C						
	Inserted in the slot from above, flush with the cylinder profile	PNP	Cable, 3-core	7.5	551391	SIES-8M-PO-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551392	SIES-8M-PO-24V-K-0.3-M8D
		NPN	Cable, 3-core	7.5	551401	SIES-8M-NO-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551402	SIES-8M-NO-24V-K-0.3-M8D

Accessories


Proximity switch M8 (round design), inductive					Datasheets → Internet: sien	
	Switching output	Electrical connection	Cable length [m]	Part no.	Type	
N/O						
	PNP	Cable, 3-core	2.5	150386	SIEN-M8B-PS-K-L	
	NPN		2.5	150384	SIEN-M8B-NS-K-L	
	PNP	Plug M8x1, 3-pin	–	150387	SIEN-M8B-PS-S-L	
	NPN		–	150385	SIEN-M8B-NS-S-L	
N/C						
	PNP	Cable, 3-core	2.5	150390	SIEN-M8B-PO-K-L	
	NPN		2.5	150388	SIEN-M8B-NO-K-L	
	PNP	Plug M8x1, 3-pin	–	150391	SIEN-M8B-PO-S-L	
	NPN		–	150389	SIEN-M8B-NO-S-L	

Slot cover ABP-5-S1						
	Description	Material	Pack size	Product weight	Part no.	Type
	For size 60, 80, 120	ABS	2 every 0.5 m	13 g	563360	ABP-5-S1

Clip SMBK						
	Description	Pack size	Product weight	Part no.	Type	
	For size 60, 80, 120	10	1g	534254	SMBK-8	

Ordering data – Encoder cables for displacement encoder, ELGD-...-M3						Datasheets → Internet: nebm	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part no.	Type		
	Displacement encoder ELGD-...-M3	Motor controller CMMP-AS and CMMT-AS	5	1599105	NEBM-M12G8-E-5-S1G9-V3		
			10	1599106	NEBM-M12G8-E-10-S1G9-V3		
			15	1599107	NEBM-M12G8-E-15-S1G9-V3		
			X ¹⁾	1599108	NEBM-M12G8-E-...-S1G9-V3		

1) Max. cable length: 25 m.

Ordering data – Adapter			
	Description	Part no.	Type
	Required in combination with the servo drive CMMT-AS as adapter between encoder cable NEBM-M12G8-...-V3 and interface X3 (position encoder 2)	8106112	NEFM-S1G9-K-0.5-R3G8