


Toothed belt axes ELGD-TB-WD

FESTO

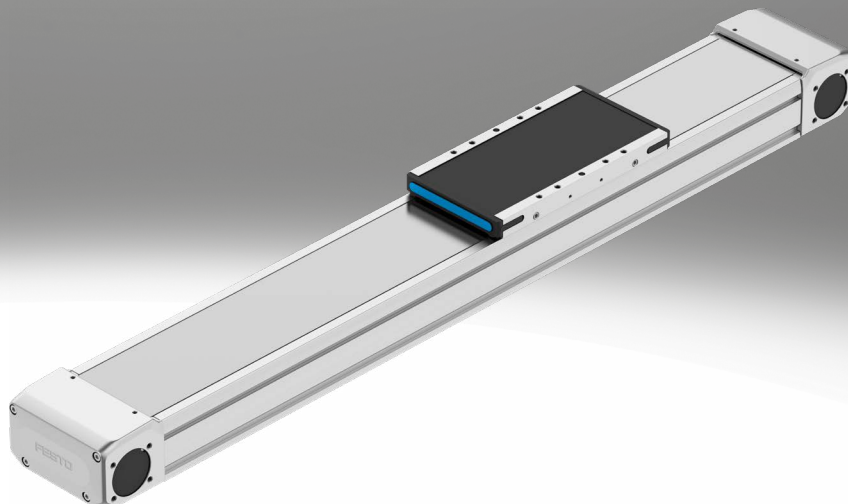

Key features

At a glance

ELGD-TB (standard design)

- Profile with a square cross section and sturdy drive elements for high feed forces
- With NSF-H1 lubricant for the food zone
- Suitable for the production of Li-ion batteries

ELGD-TB-WD (wide design)

- Reduced profile height offers smaller installation dimensions for handling systems and applications that do not require such high feed forces
- 30% lighter, while rigidity and guide load capacity are still similar to the axis in the standard design
- With NSF-H1 lubricant for the food zone
- Suitable for the production of Li-ion batteries

Innovative guide technology

- Excellent rigidity and load capacity of the guide for greater load in the same installation space
- Less vibration and smoother slide movement protect sensitive workpieces
- High speeds ensure short cycle times and a very long service life minimises downtime

Powerful drive elements

- High feed forces and acceleration for shorter process times
- Long service life and increased reliability reduce TCO

Innovative stainless steel cover strip solution

- Abrasion-free and clean surface protects workpieces from particles
- Minimised number of particles for use in cleanrooms
- Reduced ingress of dirt for use in harsh ambient conditions


Options:

- Extended or additional slide for higher axial and lateral torques and higher loads
- Two freely selectable motor positions at one end of the axis

Sealing air connection:

- Air is exchanged between the interior of the cylinder and the environment via the sealing air connection. This prevents negative pressure or excess pressure from building up inside the cylinder.
- Application of slight negative pressure prevents the emission of particles
- Application of slight excess pressure prevents the ingress of particles

Guide axis ELFD

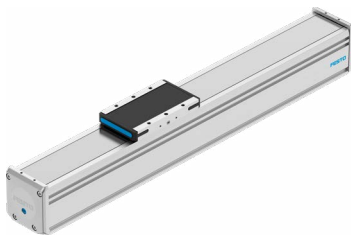

- Driveless linear guide units with guide and freely movable slide
- The guide axis is designed to support forces and torques in multi-axis applications

Key features

Engineering tools

More information → [electric-motion-sizing](#)



Save time with smart engineering tools for the optimal solution. Our goal is to increase your productivity. Our engineering tools play an integral part in achieving this goal. They help you size your system correctly, tap into unimagined productivity reserves and generate additional productivity along the entire value chain. In every phase of your project, from the initial contact to the modernisation of your machine, you will come across a number of different tools and useful tools.

Electric Motion Sizing

- Create the optimum drive package quickly and reliably. Electric Motion Sizing calculates suitable combinations of electric axis, electric motor and servo drive using just a few application details. It provides you with all the relevant data including the bill of materials and documentation for the selected combination. This avoids design errors and results in significantly improved energy efficiency for the system. A smooth connection to the Festo Automation Suite also makes commissioning easier for you.



Graphs

More information → [elgd-tb](#)



The graphs shown in this document are also available online. These can be used to display precise values.

Orientation guide



- The side on which the labelling is applied is defined as the front.

Drive system

[TB] Toothed belt


- For applications requiring a high dynamic response and short positioning times
- For long strokes

Stroke reserve




- The stroke reserve is a safety distance from the mechanical end position and is not used in normal operation.
- The sum of the stroke length and 2x stroke reserve must not exceed the maximum working stroke.

Slide design

[L] Long



Key features

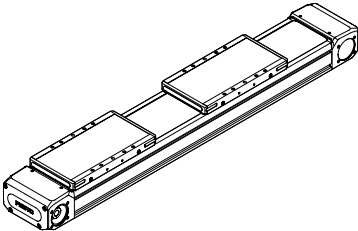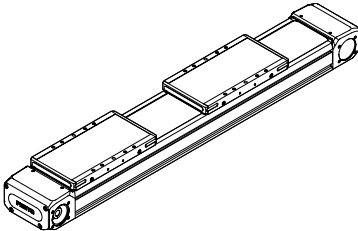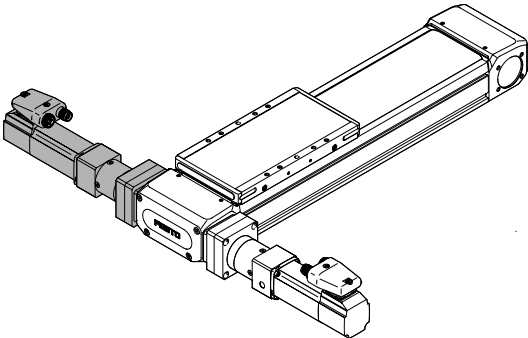Additional slide	
[ZL] Left	[ZR] Right
	
Lubrication	
[] Standard	[GN] Lubrication nipple
• With lifetime lubrication (this applies under standard conditions. Please refer to the operating manual for maintenance intervals for specific applications) • Lubrication nipple not included in delivery	
• The lubrication adapters enable the guide to be permanently lubricated using semi- or fully automatic relubrication devices • The adapters are suitable for oils and greases	
Type of mounting	
[M] Direct mounting	
• When direct mounting is selected, the axis is supplied with threads in the underside of the profile. It can then be mounted without profile mountings, which saves space • Additional centring holes make it easy to install the axis in the machine	
Measurement system	
[M3] With displacement encoder	
The position of the slide can be sensed directly when using the incremental displacement encoder. This means that all elasticities of the drivetrain can be detected and can be corrected by the motor controller	
Toothed belt material	
[PU2] Coated PU	[PU1] Uncoated PU, FDA-conform
• With steel reinforcements for high rigidity • Fabric coating for a long service life and low abrasion • Polyurethane material for resistance to many cooling lubricants	
• With steel reinforcements for high rigidity • Blue, FDA-conform polyurethane for use in the food industry	
Motor attachment	
	
• The motor can be attached to the left end of the axis at the front or rear. • The position of the motor does not have to be specified when ordering and can be changed later • Note: Unlike other axes from Festo, the motor cannot be mounted on both ends of the axis. However, the axis has a symmetrical design so that the left end can also be rotated to the right	

Type codes

001	Series	
ELGD	Gantry axis	
002	Drive system	
TB	Toothed belt	
003	Guide	
KF	Recirculating ball bearing guide	
004	Design type	
WD	Wide	
005	Size	
100	100	
120	120	
006	Stroke [mm]	
200	200	
300	300	
500	500	
600	600	
800	800	
1000	1000	
1200	1200	
1500	1500	
1800	1800	
2000	2000	
...	50 ... 8500	
007	Stroke reserve	
OH	None	
...H	0 ... 999 mm	

008	Slide design	
L	Slide, long	
009	Additional slide	
	None	
ZL	1 slide left	
ZR	1 slide right	
010	Lubrication	
	Standard	
GN	Lubrication nipple	
011	Type of mounting	
	Profile slots with clamping jaws	
M	Direct mounting	
012	Displacement encoder	
	None	
M3	With displacement encoder, incremental, resolution 2.5 µm, 10... 30 V	
013	Displacement encoder attachment position	
	None	
B	Rear	
F	Front	
014	Material of toothed belt	
PU1	Uncoated PU, FDA-compliant	
PU2	Coated PU	

Datasheet

General technical data			
Size		100	120
Design		Electromechanical axis with toothed belt	
Guide		Recirculating ball bearing guide	
Mounting position		Any	
Working stroke			
ELGD-...	[mm]	50 ... 8500	50 ... 8500
ELGD-...-M	[mm]	50 ... 1400	50 ... 1370
Max. feed force F _x	[N]	240	500
Max. no-load torque1)			
ELGD-...-PU1	[Nm]	0.4	1.4
ELGD-...-PU2	[Nm]	0.4	1.38
Max. no-load resistance to shifting1)	[N]	29.9	71.2
Max. driving torque	[Nm]	3.2	9.55
Max. speed	[m/s]	3	
Max. acceleration	[m/s²]	50	
Repetition accuracy	[mm]	±0.04	
Position sensing	For inductive sensors		

1) At 0.2 m/s

Weight [g]			
Size		100	120
Basic weight with 0 mm stroke ¹⁾		3864	6495
Additional weight per 10 mm stroke		55	78
Moving mass		1360	1957

1) Including slide

Toothed belt			
Size		100	120
Pitch [mm]		3	5
Effective diameter [mm]		26.74	38.2
Feed constant [mm/rev]		84	120

Homing

Homing can be carried out in two ways:

- Against a fixed stop
- Using a reference switch

The following values must be observed:

Size		100	120
Max. impact energy [mJ]		0.75	1
Note on the impact energy in the end positions [m/s]		At maximum homing speed of 0.01 m/s	

Datasheet

Operating and environmental conditions		
Ambient temperature ¹⁾	[°C]	0 ... +60
Storage temperature	[°C]	−20 ... +60
Degree of protection		IP40
Duty cycle	[%]	100
Suitable for cleanrooms, measured according to ISO 14644-14		ISO class 4
Maintenance interval ²⁾		Lifetime lubrication

1) Note operating range of proximity switches

2) This information applies under standard conditions. Please refer to the operating manual for maintenance intervals for specific applications.

Cleanroom suitability

The axis ELGD is designed for cleanroom applications and tested under typical operating conditions. The ISO class is determined using standardised testing procedures in which particle emissions are measured for several hours until stable values are reached. The classification of the cleanroom class is carried out according to ISO 14644 14 using reliable statistical methods. The tests are carried out with 100% duty cycle. The ISO class is determined over a period of 100 minutes in order to obtain reliable performance data.

The standard grease used in the ELGD has a low particle emission and is therefore well suited for cleanroom applications.

Our engineering team can carry out a detailed assessment for applications with specific cleanroom requirements and recommend an optimal configuration that is tailored to your process.

Size	60	80	120
Suitable for cleanrooms, measured according to ISO 14644-14	ISO class 4 (vacuum) ²⁾ ISO class 6		

1) In order to achieve the required ISO class, the axis must be cleaned and correctly prepared before commissioning.

ISO class			4			5			6				7				
Speed [m/s]			0.1	0.5	1	0.1	0.5	1	1.5	0.1	0.5	1	1.5	0.1	0.2	0.5	1
	For size																
Required vacuum flow rate ²⁾	100	[l/min]	0	50	**	0	30	50	30	0	0	10	10	0	0	0	*
	120	[l/min]	0	30	50	0	10	10	50	0	0	0	0	0	0	0	10

* Not measured

** Not reached

2) A vacuum needs to be connected to both end caps to achieve the maximum suction power with the toothed belt axes.

Datasheet

Mass moments of inertia			
Size		100	120
J_0	[kg mm ²]	295.42	916.87
J_H per metre stroke	[kg mm ² /m]	22.52	87.6
J_L per kg effective load	[kg mm ² /Kg]	178.76	364.8

The mass moment of inertia J_A of the entire axis is calculated as follows:

$$J_A = J_0 + J_H \times \text{working stroke [m]} + J_L \times m_{\text{effective load [kg]}}$$

Materials

Axis	
Drive cover	Gravity die-cast aluminium, painted
Slide	Wrought aluminium alloy
Cover strip	High-alloy stainless steel
Toothed belt	
ELGD-...-PU2	Polyurethane with steel cord and nylon cover
ELGD-...-PU1	Polyurethane with steel cord
Guide	Steel
Profile	Anodised wrought aluminium alloy
Belt pulley	High-alloy stainless steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-C1-L
Suitable for the production of Li-ion batteries	Suitable for battery production with reduced Cu/Zn/Ni values (F1a)

Technical data – Displacement encoder

Type		ELGD-...-M3
Resolution	[µm]	2.5
Max. travel speed with displacement encoder	[m/s]	7
Supply voltage	[VDC]	10 – 30 (±10%)
Current	[mA]	Max. 150
Encoder signal		5 V TTL; A/A, B/B; reference signal (N/N) cyclically every 5 mm (zero pulse)
Signal output		Line driver, alternating, resistant to sustained short circuit
Electrical connection		8-pin plug connector, round design, M12
Cable length	[mm]	160

Operating and environmental conditions – Displacement encoder

Ambient temperature	[°C]	–10 ... +70
Degree of protection		IP64
CE marking (see declaration of conformity)		To EU EMC Directive ¹⁾


- 1) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet


Load values

The indicated forces and torques refer to the centre of the guide. The point of application of force is the point where the centre of the guide and the longitudinal centre of the slide intersect. The appropriate size is selected using the following three steps:

1. Check the maximum permissible values (must not be exceeded)
2. Calculate the load comparison factor
3. Determine the service life

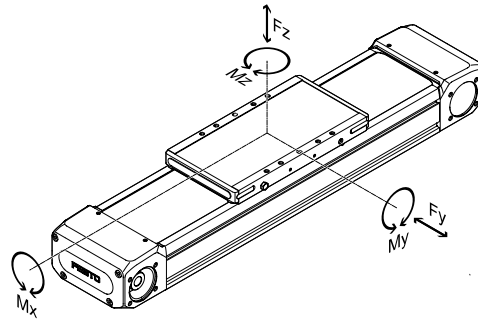

Distance from the slide surface to the centre of the guide

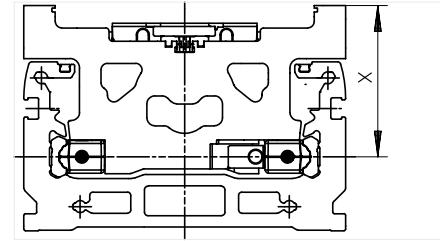

Distance from the slide surface to the centre of the guide

Size	100	120
Dimension x [mm]	47	51

1. Check the maximum permissible values


Max. permissible forces and torques for the overall axis (strength limits)

Size	100	120
Max. force F_y , overall axis [N]	4092	5914
Max. force F_z , overall axis [N]	2250	5280
Max. torque M_x , overall axis [Nm]	150	290
Max. torque M_y , overall axis [Nm]	191	563
Max. torque M_z , overall axis [Nm]	270	527


Maximum permissible support spacing L as a function of force F

The axis may need to be supported in order to limit deflection in the case of long strokes.

The following graphs can be used to determine the maximum permissible support spacing L_y as a function of force F acting on the axis. The deflection is $f = 0.5$ mm.

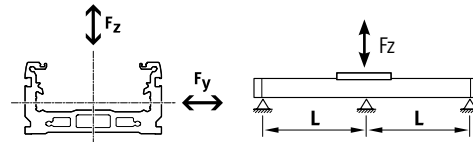


Size 100

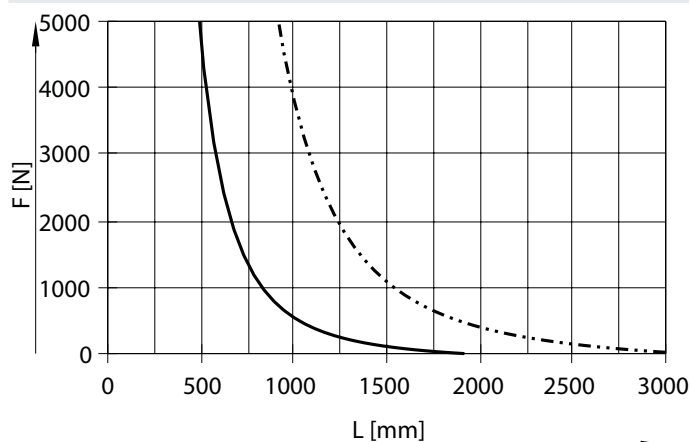

— F_z
 - - - F_y


Size 120

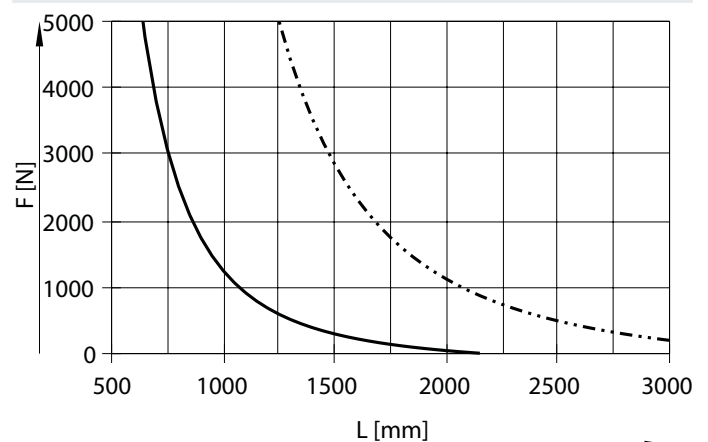

— F_z
 - - - F_y

Datasheet

2. Calculate the load comparison factor

**Note**

For a guide system to have a service life of 5000 km, the load comparison factor must have a value of $f_v \leq 1$, based on the maximum permissible forces and torques for a service life of 5000 km.

This formula can be used to calculate a guide value.

The engineering software "Electric Motion Sizing" is available for more precise calculations

→ www.festo.com/x/electric-motion-sizing

If the axis is subjected to several of the indicated forces and torques at the same time, the following equation must be satisfied in addition to the indicated maximum loads:

Calculating the load comparison factor:

$$f_v = \frac{|F_{y1}|}{F_{y2}} + \frac{|F_{z1}|}{F_{z2}} + \frac{|M_{x1}|}{M_{x2}} + \frac{|M_{y1}|}{M_{y2}} + \frac{|M_{z1}|}{M_{z2}} \leq 1$$

F_1/M_1 = Values occurring in the application

F_2 = Permissible values at 5000 km from the graph "load as a function of support spacing"

M_2 = Maximum permissible values (see table)

Max. permissible torques for the guide calculation with reference service life


Size	100	120
Reference service life [km]	5000	
Max. torque M_x [Nm]	130	330
Max. torque M_y [Nm]	200	600
Max. torque M_z [Nm]	200	540

Permissible guide load as a function of the support spacing

Depending on how firmly the axis is supported, the maximum permissible forces vary due to the design of the guide system.

If the axis is used as a cantilever or in yoke operation, the values for a support spacing of 2000 mm can be selected.


Size 100

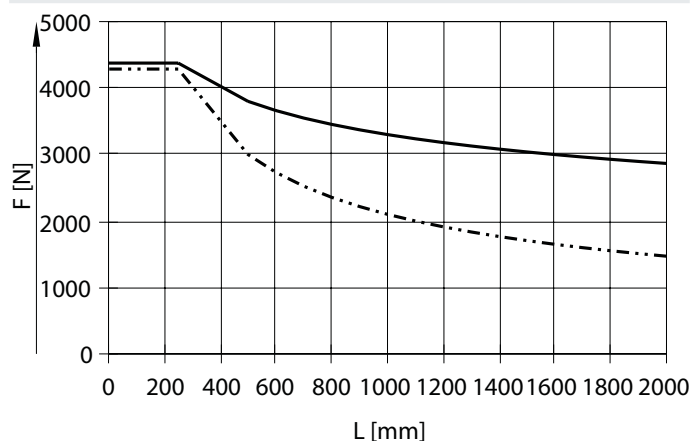

— Fy - ELGD-100

- - - Fz - ELGD-100

Size 120

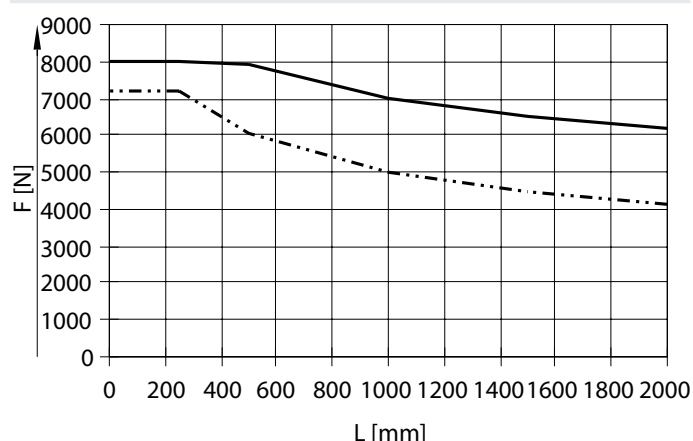

— Fy - ELGD-120

- - - Fz - ELGD-120

Datasheet

3. Determine the service life

The service life of the guide depends on the load. To be able to provide an indication of the service life of the guide, the graph below plots the load comparison factor f_v against the service life.

These values are only theoretical. You must consult your local Festo contact for a load comparison factor f_v greater than 1.3.


Load comparison factor f_v as a function of service life l

Example:

A user wants to move an x kg load. Using the formula (→ page 10) gives a value of 1.3 for the load comparison factor f_v . According to the graph, the guide would have a service life of approx. 2500 km. Reducing the acceleration reduces the M_z and M_y values. A load comparison factor f_v of 1 now gives a service life of 5000 km.

Note:

If the application has been calculated using “Electric Motion Sizing”, the average guide comparison figure represents the workload of the guide. (100% average guide comparison figure corresponds to $f_v = 1$). With this value, the service life can be estimated using the service life graph

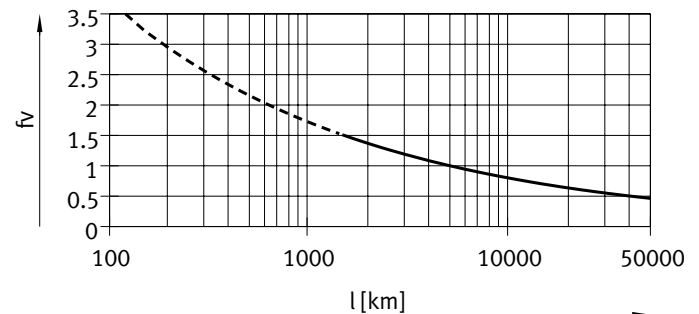

Comparison of the characteristic load values for 100 km with dynamic forces and torques of recirculating ball bearing guides

The characteristic load values of the bearing guides are standardised to ISO and JIS using dynamic and static forces and torques. These forces and torques are based on an expected service life of the guide system of 100 km to ISO or 50 km to JIS.

As the characteristic load values are dependent on the service life, the maximum permissible forces and torques for a 5000 km service life cannot be compared with the dynamic forces and torques of bearing guides to ISO/JIS.

To make it easier to compare the guide capacity of linear axes ELGD with bearing guides, the table below lists the theoretically permissible forces and torques for a calculated service life of 100 km. This corresponds to the dynamic forces and torques to ISO.


These 100 km values have been calculated mathematically and are only to be used for comparing with dynamic forces and torques to ISO. The drives must not be loaded with these characteristic values as this could damage the axes.

Max. permissible forces and torques for a theoretical service life of 100 km (from a guide perspective only)



Size		100	120
$F_{y_{max}}$	[N]	18415	35153
$F_{z_{max}}$	[N]	18415	35153
$M_{x_{max}}$	[Nm]	645	1459
$M_{y_{max}}$	[Nm]	720	1920
$M_{z_{max}}$	[Nm]	720	1920

Datasheet


Speed v as a function of rotational speed n

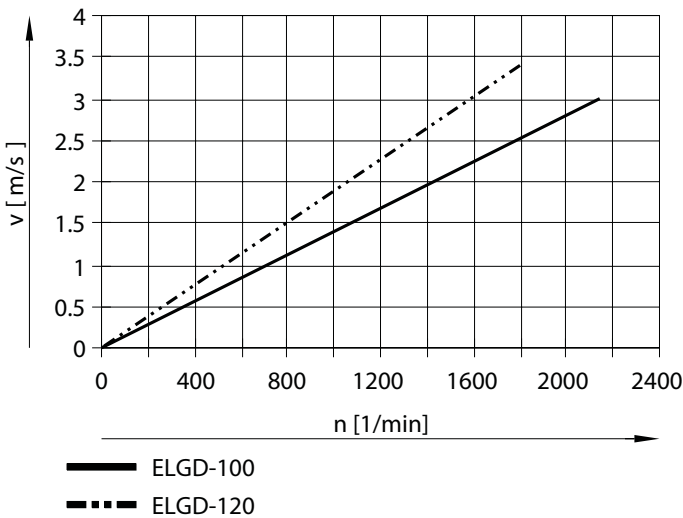

Feed force F as a function of input torque M

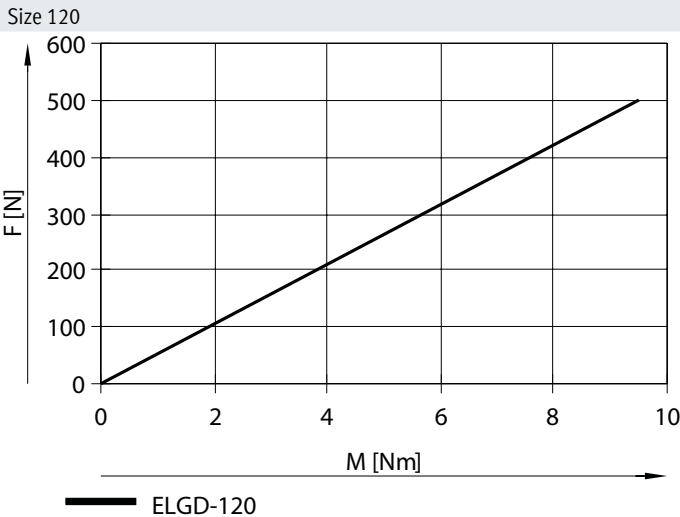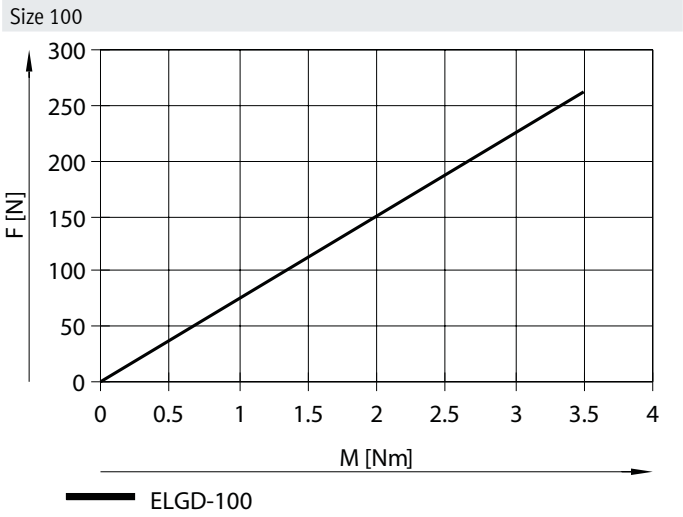

2nd moment of area



Size		100	120
I_y	[mm ⁴]	0.347x10 ⁶	0.77x10 ⁶
I_z	[mm ⁴]	2.268x10 ⁶	5.801x10 ⁶

Recommended deflection limit values

Adherence to the following limit values for deflection is recommended to ensure the continuing functionality of the axes. Greater deformation can result in increased friction, greater wear and reduced service life.


Size	Dynamic deflection (moving load)	Static deflection (stationary load)
100, 120	0.05% of the axis length, max. 0.5 mm	0.1% of the axis length

Datasheet

Working stroke reduction

For axis ELGD with additional slide ZL/ZR

For a toothed belt axis with additional slide, the working stroke is reduced by the length of the additional slide and the distance between the two slides

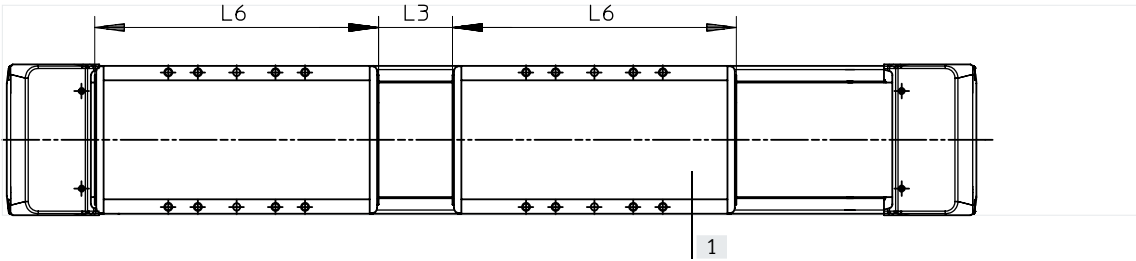


L6 = Slide length
L6 = Additional slide length
L3 = Distance between the two slides
[1] Additional slide

Example:
Type ELGD-BS-KF-WD-100-500-...-ZR
Working stroke without Additional slide = 500 mm
L3 = 50 mm
L6 = 192 mm
Working stroke with additional slide = 258 mm
(500 mm – 50 mm – 192 mm)

Dimensions – Additional slide			
Size		100	120
Length L6	[mm]	192	263
Min. distance between the slides L3	[mm]	≥ 50	≥ 50

Datasheet

Dimensions – ELGD-TB-...

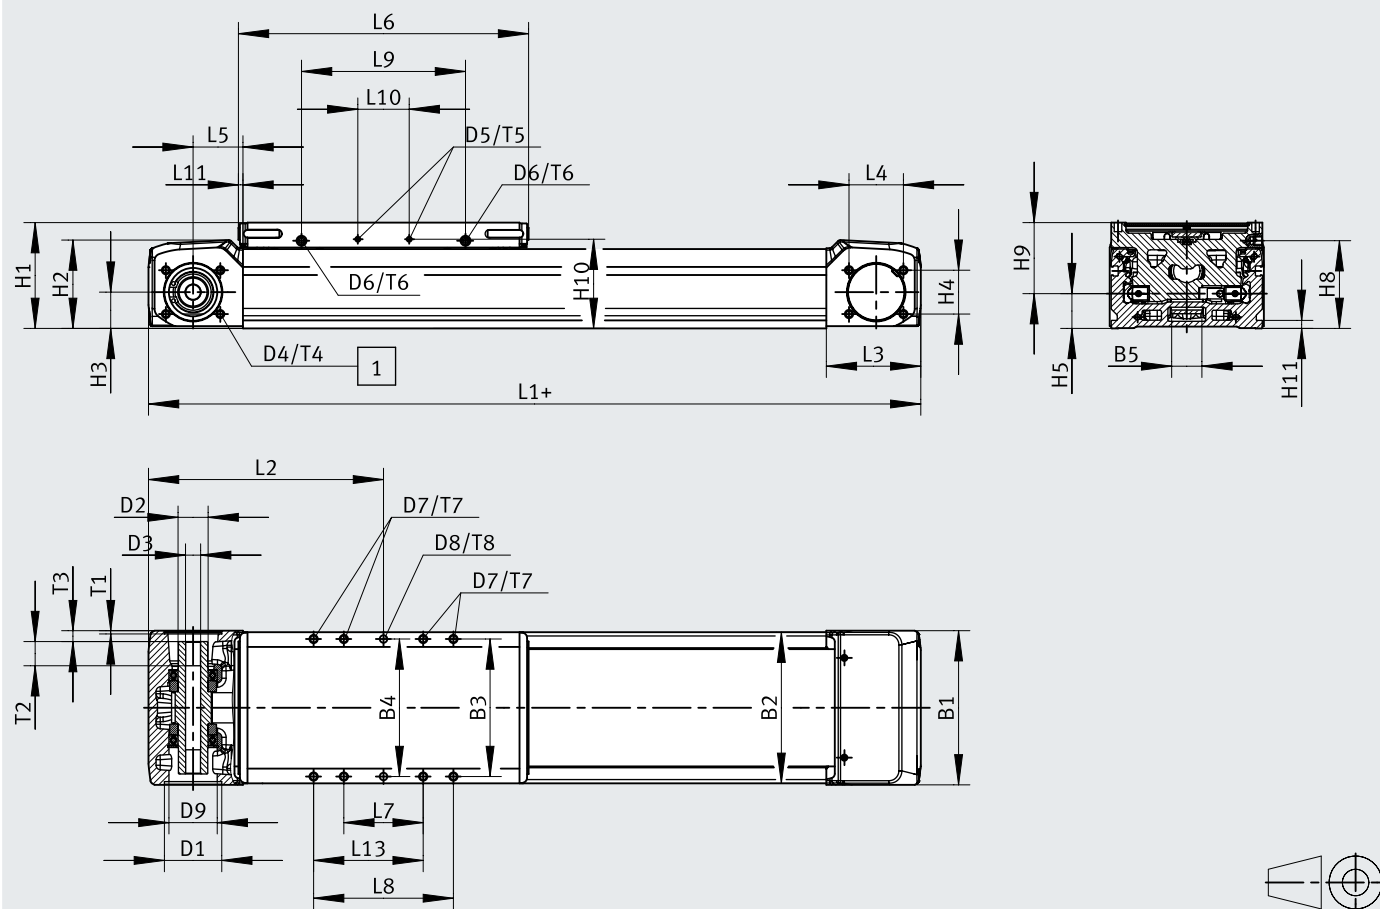Download CAD data → www.festo.com

[1] Sealing air connection

+ = plus stroke length + 2x stroke reserve

	B1	B2	B3	B4 ±0.03	B5	D1 ∅ H7	D2 ∅ H7	D3 ∅	D4	D5	D6	D7	D8 ∅ H7	D9 ∅	H1
ELGD-TB-100	102	100	91	91	20	38	20k5	10	M5	M6	M3	M5	5	27.5	70
ELGD-TB-120	123	120	107	107	30	48	25k6	16	M6	M6	M3	M6	6	42.8	82


	H2	H3	H4	H5	H8	H9	H10	H11	L1	L2 min.	L3	L4	L5	L6
ELGD-TB-100	58.5	24	29	23	58	47	59	5.3	311	155.5	62.5	36	33	192
ELGD-TB-120	68.5	29.6	26	31	68.5	51y	69.5	5.3	395	197.5	69	51	36	263

	L7 ±0.1	L8 ±0.1	L9	L10	L11		L13	T1	T2	T3	T4	T5	T6	T7	T8
					min.	max.									
ELGD-TB-100	52.5	92.5	108.5	34	3	6	72.5	2.2	16	7.2	12	6	7	16.5	6 ±0.05
ELGD-TB-120	92.5	132.5	161	34	3	6	112.5	2.2	29	4	12	6	7	17.5	8 ±0.1

Datasheet

Dimensions – ELGD-TB-...-ZL/-ZR (with additional slide)


Download CAD data → www.festo.com

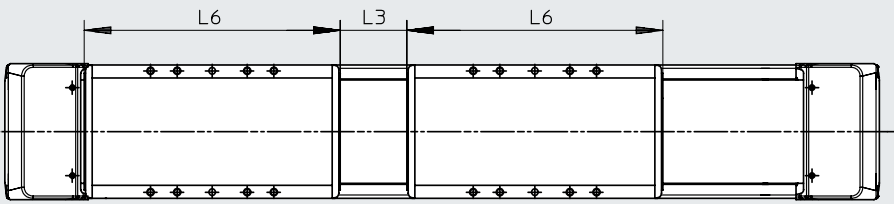

	L3 (Minimum distance)	L6
ELGD-TB-100	50	192
ELGD-TB-120	50	263

Dimensions – ELGD-TB-...- (profile)

Download CAD data → www.festo.com

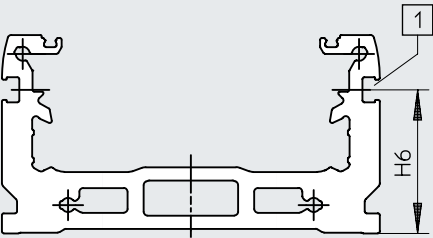


[1] Sensor slot for proximity switch

	H6
ELGD-TB-100	38

Dimensions – ELGD-TB-...- (profile)

Download CAD data → www.festo.com

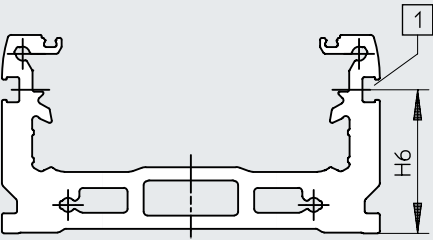


[1] Sensor slot for proximity switch

	H6	H7
ELGD-TB-120	81.5	92

Datasheet

Dimensions – ELGD-TB-...-M (for direct mounting)

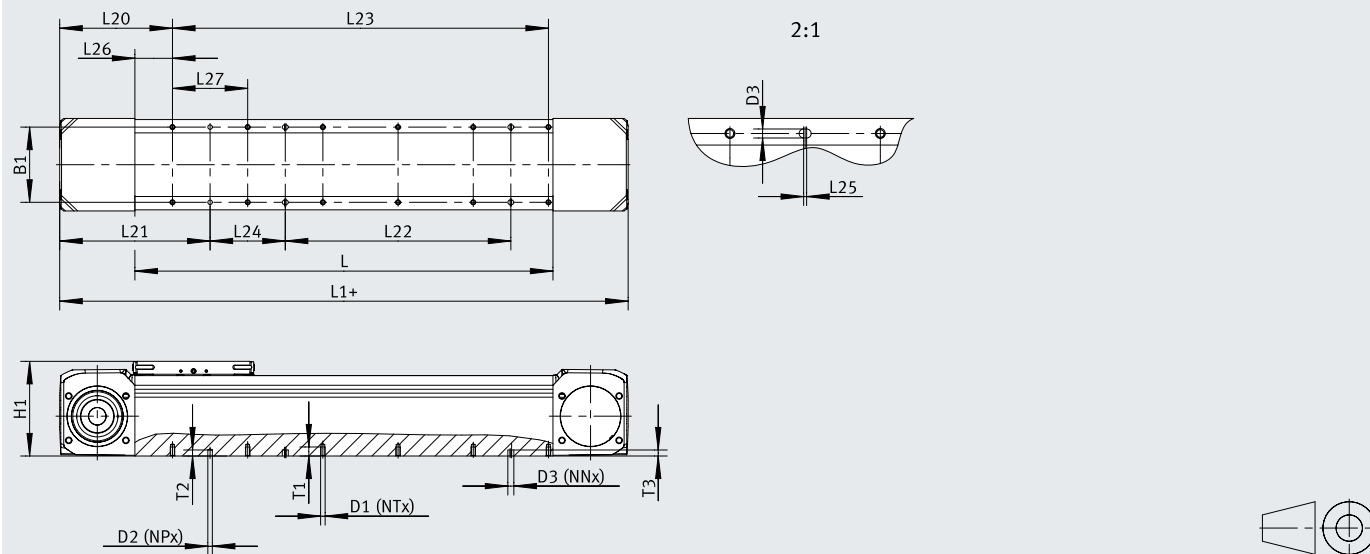Download CAD data → www.festo.com

+ = plus stroke length + 2x stroke reserve

$$L23 = (NT/2-1) \times 100$$

	B1	B2	D1	D2 Ø	H1	L (with zero stroke length)	L20	L21
ELGD-TB-100-...-L-M	83	H7	M5	6	69.4	186	112.5	162.5
ELGD-TB-120-...-L-M	100	6	M6	6	81.4	257	119	169

	L25	L26	L27	T1	T2	T3
ELGD-TB-100-...-L-M	2	50	100	10.5	8	8
ELGD-TB-120-...-L-M				12.5		

L	D1 ¹⁾		D2 ²⁾	D3 ³⁾		L24
	NT	L23	NP	NN	L22	
<270	4	100	2	–	–	–
≥270	6	200		2		4
≥370	8	300				
≥470	10	400				
≥570	12	500				
≥670	14	600				
≥770	16	700				
≥870	18	800				
≥970	20	900				
≥1070	22	1000				
≥1170	24	1100				
≥1270	26	1200				
≥1370	28	1300				
≥1470	30	1400				
≥1570	32	1500				
≤1650						

1) Threaded hole


2) Pin hole

3) Slotted hole

Datasheet

Dimensions – Profile mounting EAHF-E24-60-P
(standard mounting)

Download CAD data → www.festo.com

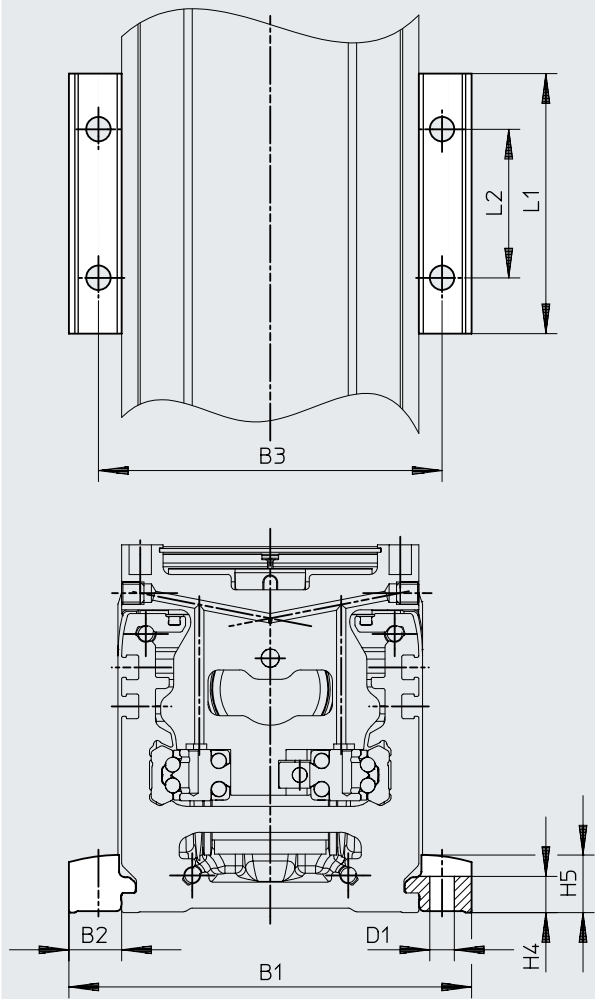


		B1	B2	B3	D1 Ø H13	H4 ±0.1	H5	L1	L2
EAHF-E24-60-P	ELGD-TB-100	128.4	14.2	112.5	6.6	10.3	16.5	70	40
	ELGD-TB-120	148.4	14.2	132.5	6.6	10.3	16.5	70	40

Datasheet

Dimensions – Profile mounting EAHF-E24-60-P-S


Download CAD data → www.festo.com

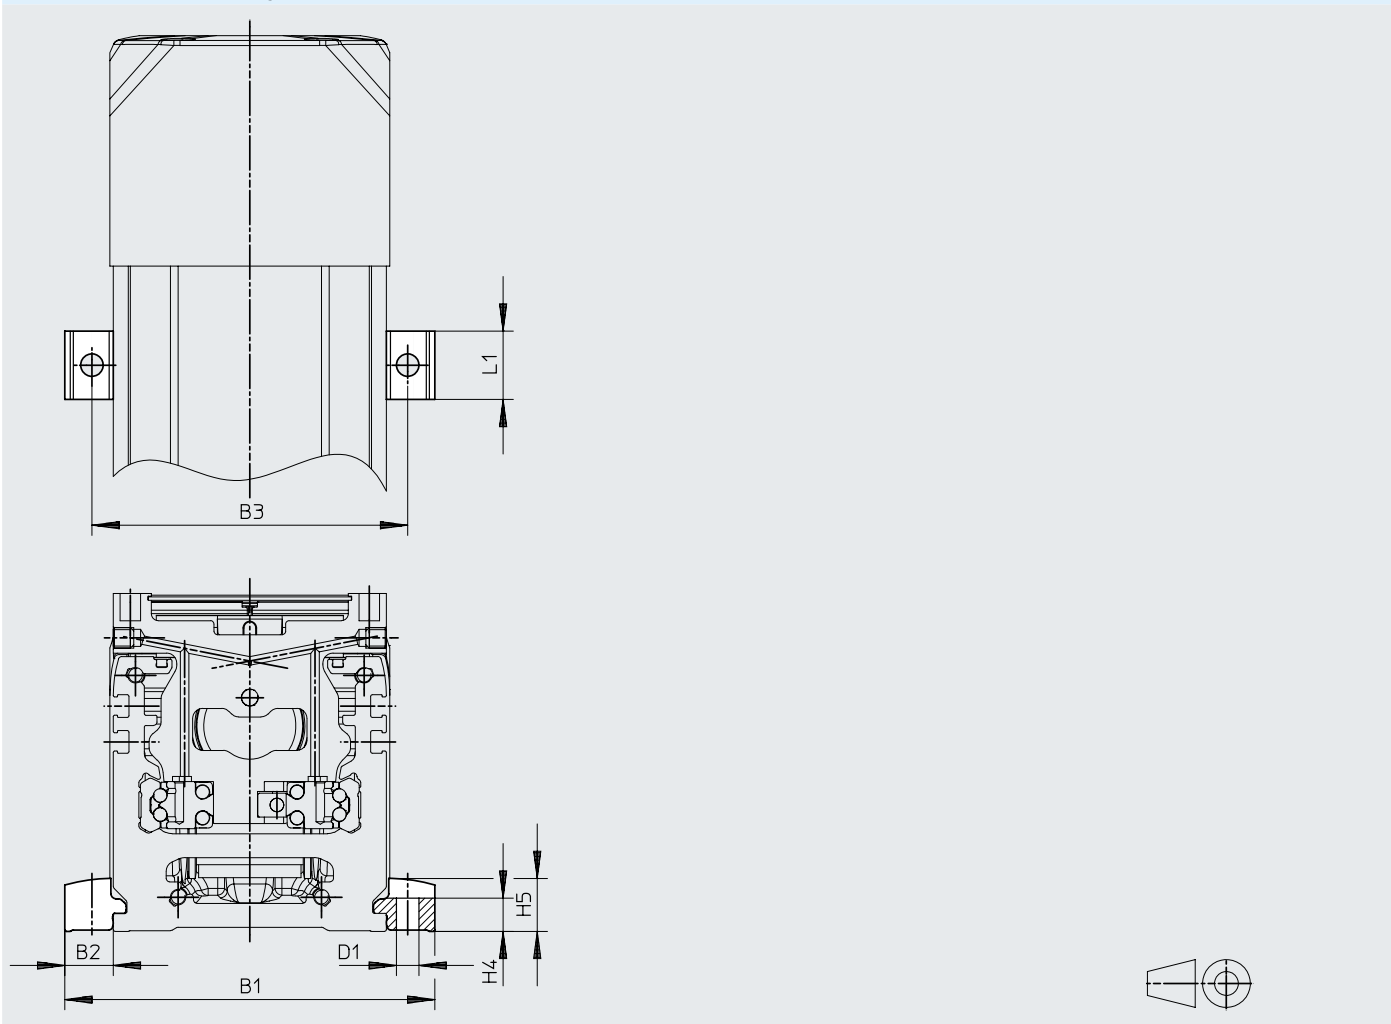

		B1	B2	B3	D1 Ø H13	H4 ±0.1	H5	L1
EAHF-E24-60-P-S	ELGD-TB-100	128.4	14.2	112.5	6.6	10.3	16.5	20
	ELGD-TB-120	148.4	14.2	132.5	6.6	10.3	16.5	20


Datasheet

Dimensions – Profile mounting EAHF-E24-60-P-D

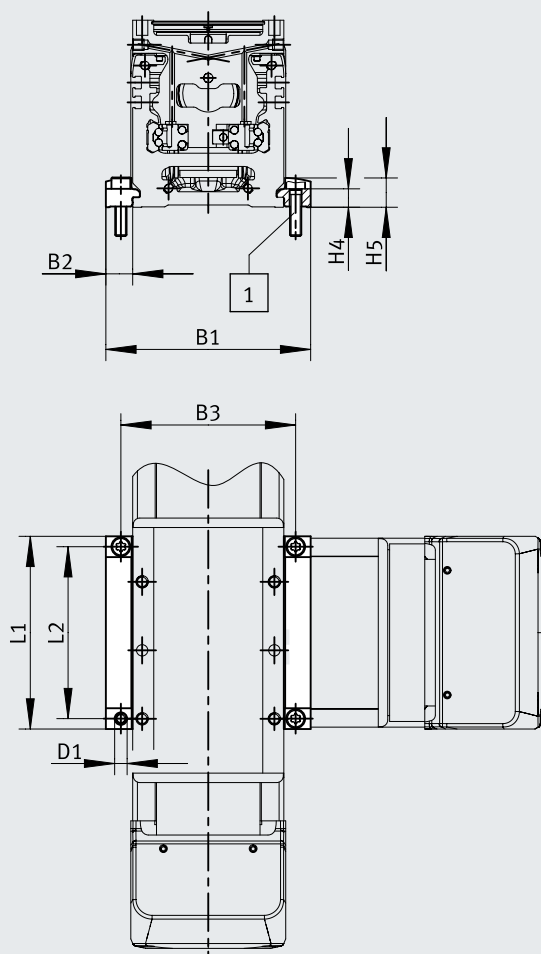Download CAD data → www.festo.com

Note:

The profile mounting EAHF-E24-60-P-D... is designed for mounting axis ELGD on axis ELGD.




[1] Screws are included in the scope of delivery

		B1	B2	B3	D1 Ø H13	H4 ±0.1	H5	L1	L2
EAHF-E24-60-P-D6	ELGD-TB-100	128.4	14.2	112.5	5.5	10.3	16.5	102	91
EAHF-E24-60-P-D7	ELGD-TB-120	148.4	14.2	132.5	6.6	10.3	16.5	120	107

Datasheet

Dimensions – Adjusting kit EADC-E16-...

Download CAD data → www.festo.com

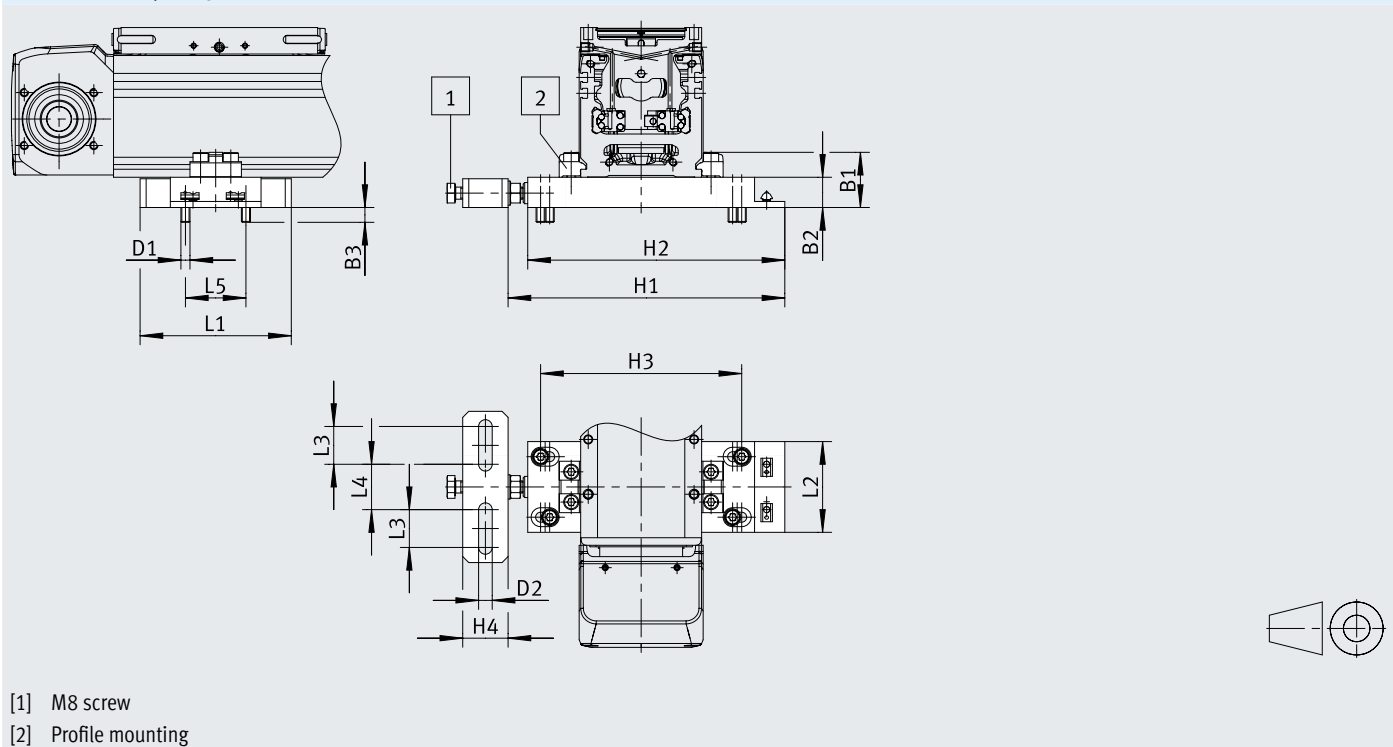

		B1	B2	B3	D1	D2	H1	H2
EADC-E16-120-E24	ELGD-TB-120	36.5	20	9.8	M6	9	203	190

		H3		H4	L1	L2	L3	L4	L5
		min.	min.						
EADC-E16-120-E24	ELGD-TB-120	161	173	30	100	60	25	30	40

Datasheet

Dimensions – Mounting kit EAHM-E24-AP-120

Download CAD data → www.festo.com


Note:

For the following combinations:

Base axis: ELGD-TB-120-L

Assembly:

Mini slide DGST-20/25

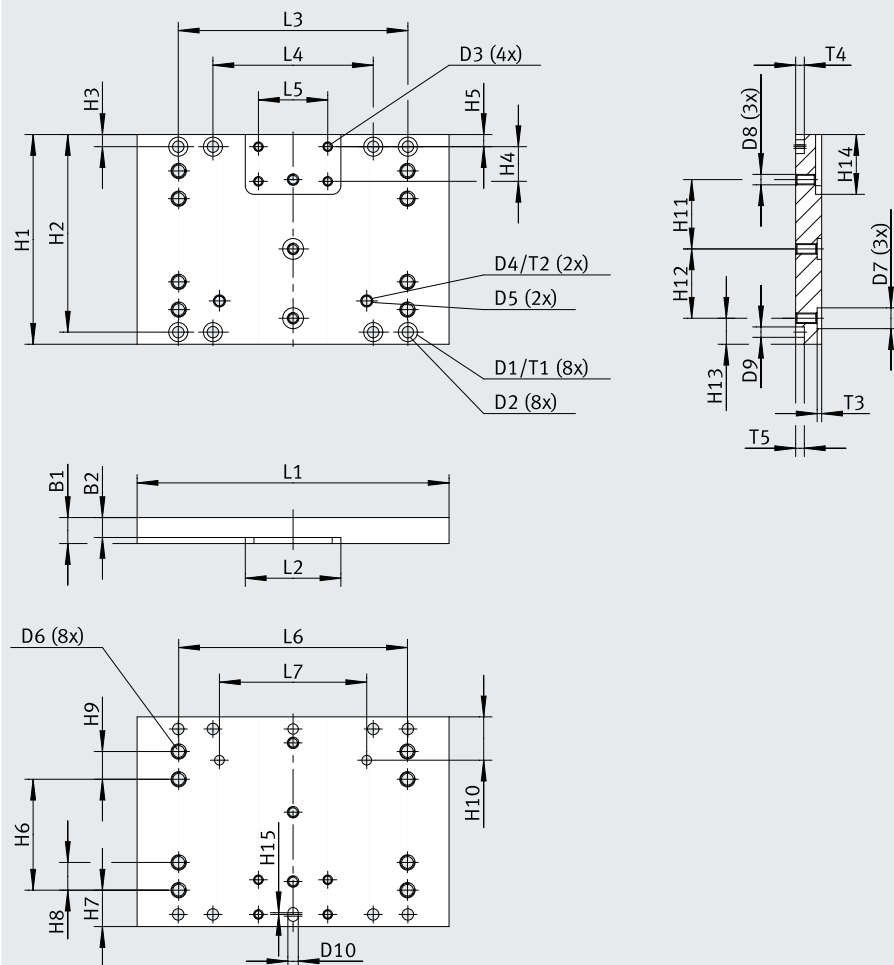


		B1	B2	D1 ∅ H13	D2 ∅ H13	D3	D4 ∅ H7	D5 ∅	D6	D7 ∅ H8	D8	D9 ∅ H8	D10	H1
EAHM-E24-AP-120	ELGD-TB-120-L	15	11.5	11	6.6	M5	6	5.6	M8	12	M6	6	6	121

		H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14
EAHM-E24-AP-120	ELGD-TB-120-L	114	7	20	7	64	21	16	16	25	40	40	15	34.5

		L1	L2 +0.5	L3	L4	L5	L6	L7	T1	T2	T3	T4	T5
EAHM-E24-AP-120	ELGD-TB-120-L	180	55.2	132.5	92.5	40	132	85	6.5	5	2.6	5	5


Datasheet

Dimensions – Switch lug EAPM-E24-60-SLS Download CAD data → www.festo.com

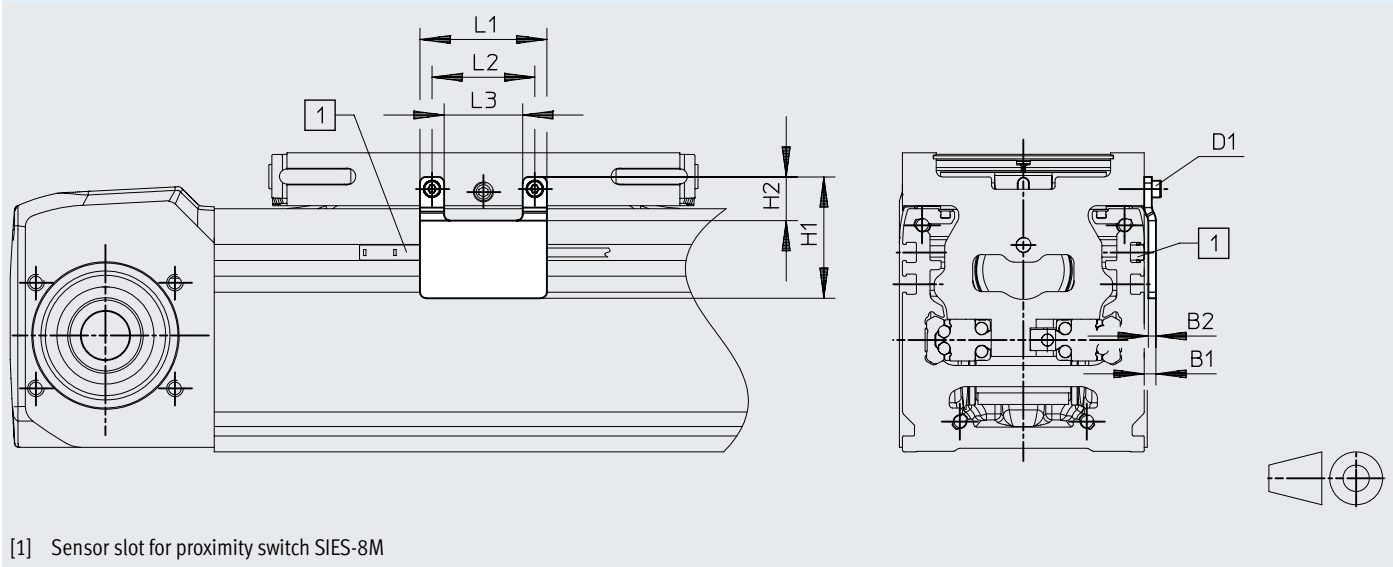

		B1	B2	D1	H1	H2	L1	L2	L3
EAPM-E24-60-SLS	ELGD-TB-100	3.5	2.5	M3	40.2	14.5	42	34	26
	ELGD-TB-120								


Dimensions – Switch lug EAPM-E24-...-SLE Download CAD data → www.festo.com

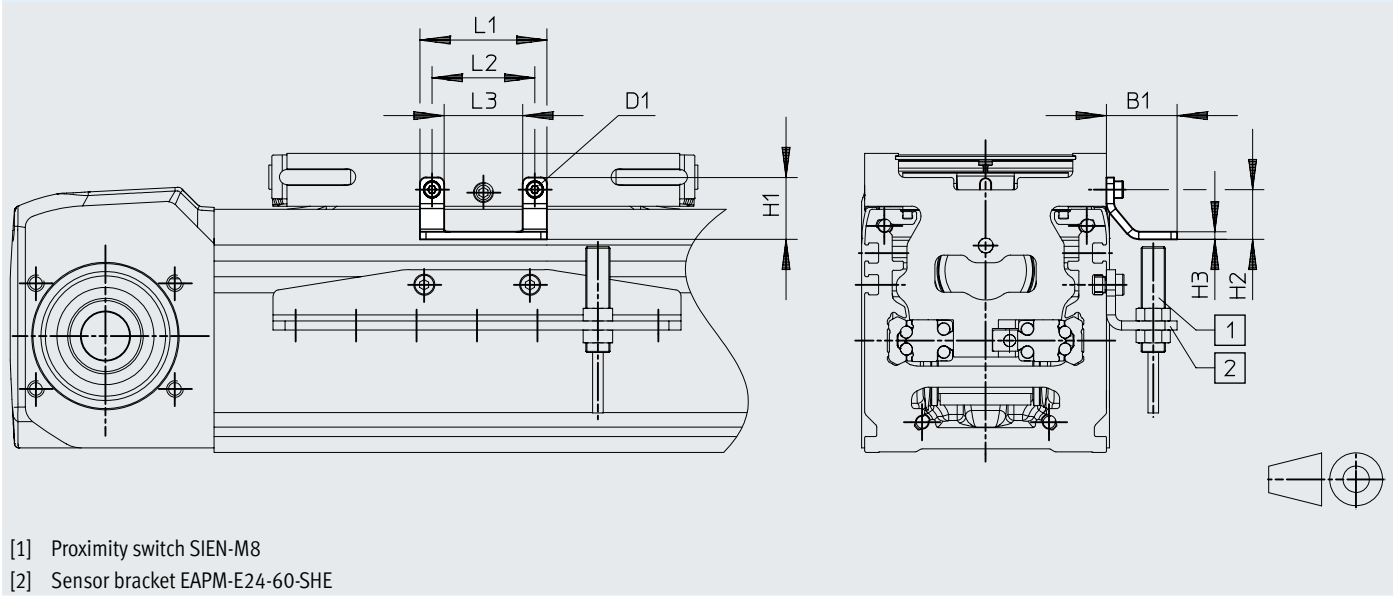

		B1	D1	H1	H2	H3	L1	L2	L3
EAPM-E24-60-SLE	ELGD-TB-100	23.4	M3	20.5	16.5	2.5	42	34	26
	ELGD-TB-120								

Datasheet

Dimensions – Sensor bracket EAPM-E24-60-SHE

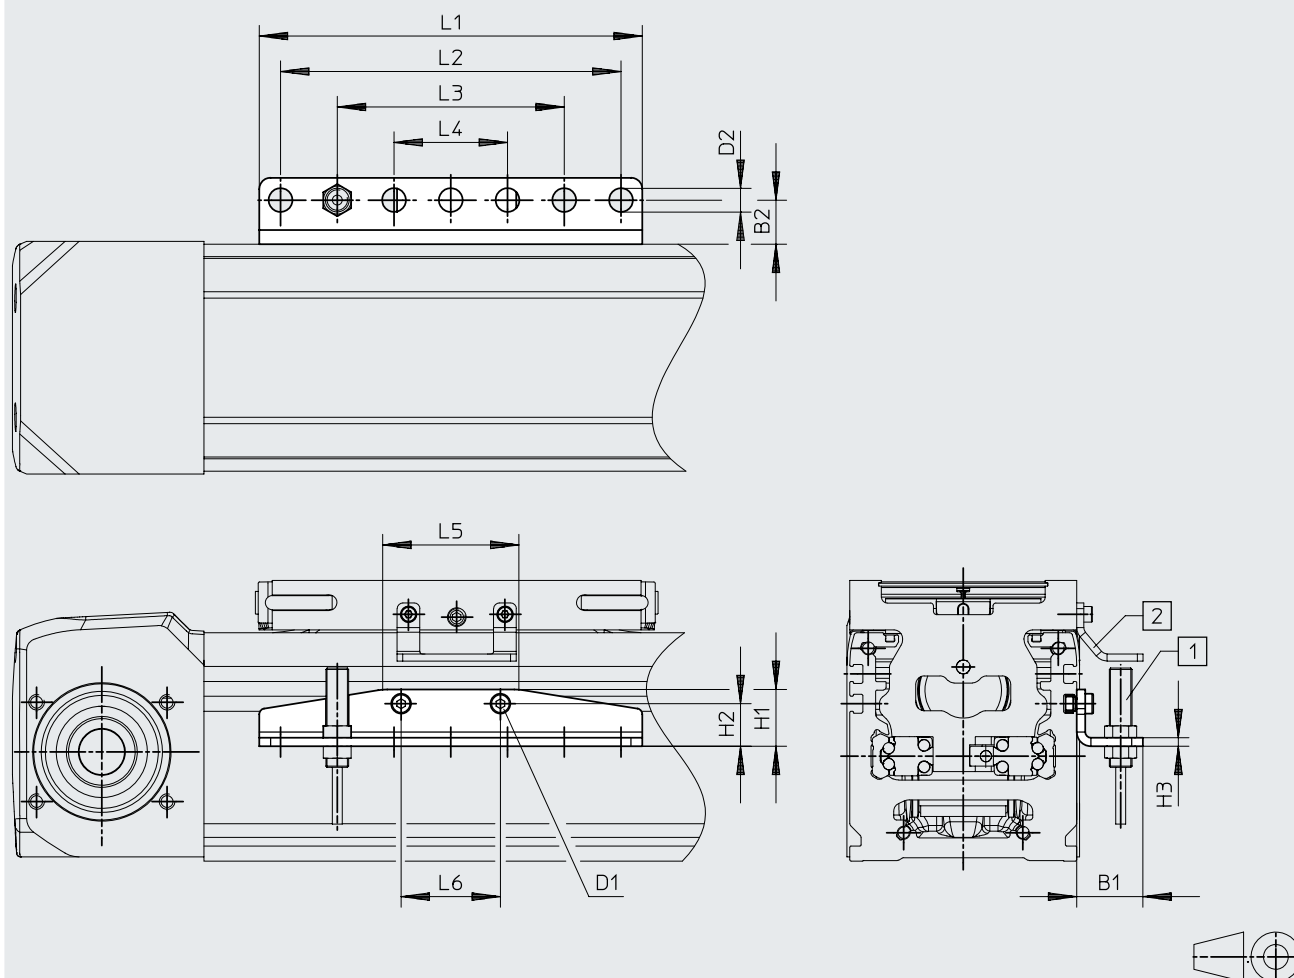Download CAD data → www.festo.com

[1] Proximity switch SIEN-8M


[2] Switch lug EAPM-E24-60-SLE

		B1	B2	D1	D2 ∅ H13	H1	H2	H3
		±0.3				±0.3		
EAPM-E24-60-SHE	ELGD-TB-100	23.4	15.5	M4	8.4	20	15	3
	ELGD-TB-120							
		L1	L2	L3	L4	L5	L6	
		±0.2						
EAPM-E24-60-SHE	ELGD-TB-100	135	120	80	40	48	35	
	ELGD-TB-120							

Datasheet

Dimensions – Sensor bracket EAPM-E24-60-SHO

Download CAD data → www.festo.com

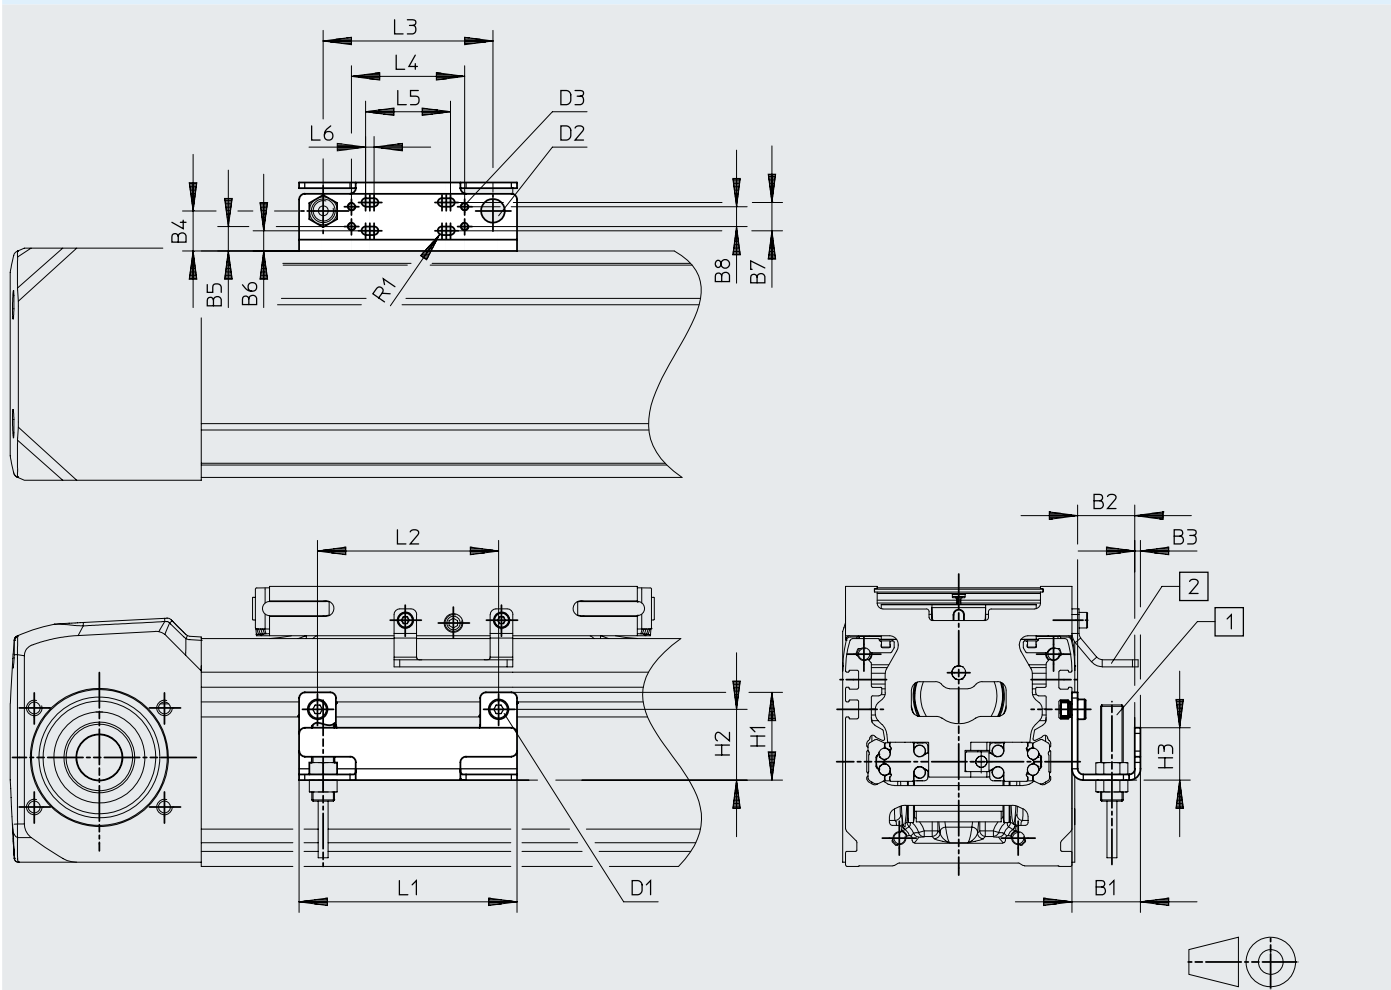


- [1] Inductive sensor M8
[2] Switch lug EAPM-E24-60-SLE

		B1	B2	B3	B4	B5	B6	B7
EAPM-E24-60-SHO	ELGD-TB-100	24.2	20.2	2	14.1	8.6	7.1	10
	ELGD-TB-120							
		B8	D1	D2 ø	D3	H1	H2	H3
EAPM-E24-60-SHO	ELGD-TB-100	7	M3	8.4	M3	31	25	18.5
	ELGD-TB-120							
		L1	L2	L3	L4	L5	L6	R1
EAPM-E24-60-SHO	ELGD-TB-100	77	64	60	40	24	3	1.5
	ELGD-TB-120							

Datasheet

Dimensions – ELGD-...-M3 with incremental displacement encoder

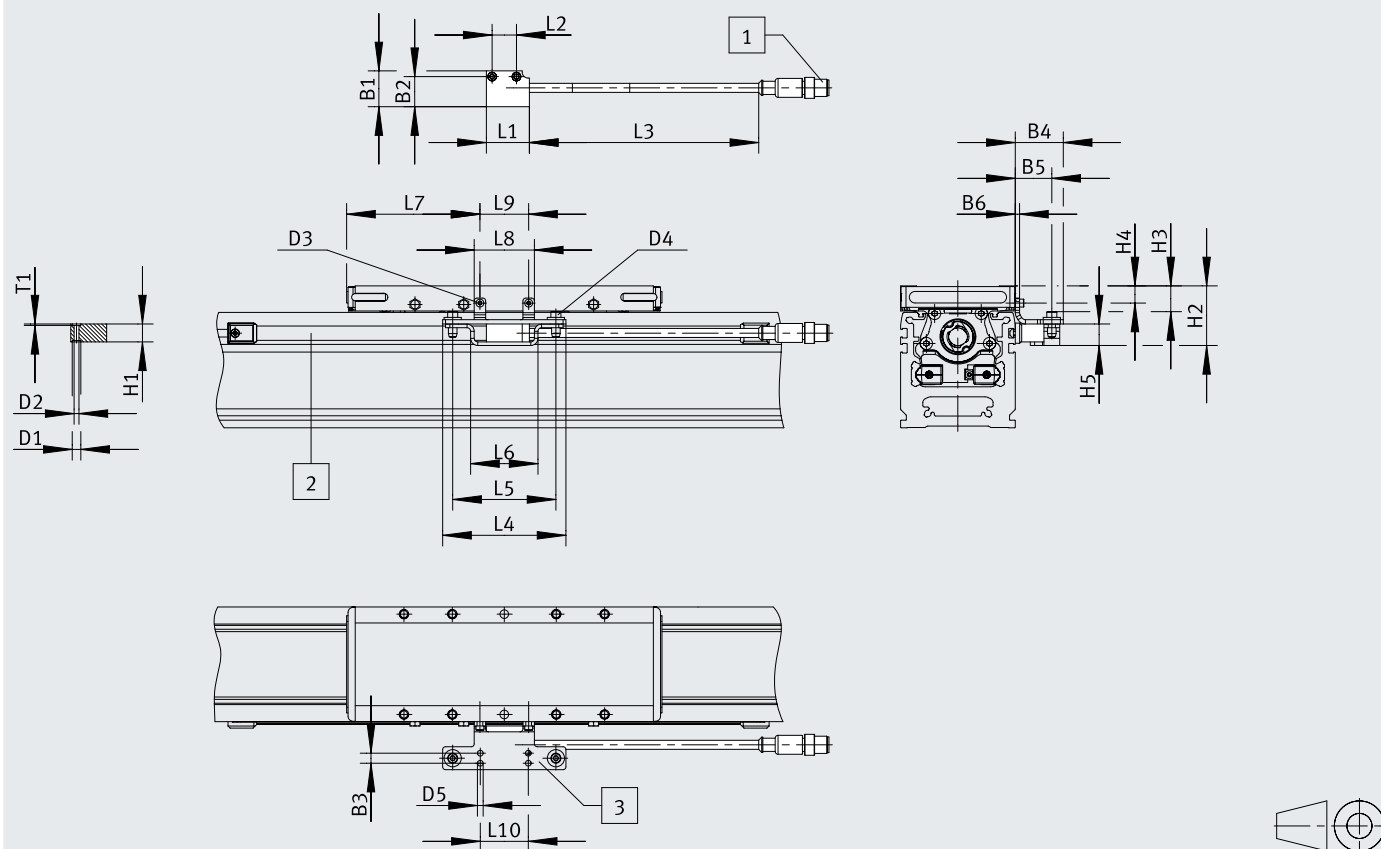Download CAD data → www.festo.com


- [1] Plug M12 (8-pin)
 [2] Displacement encoder
 [3] Switch lug

	B1	B2	B3	B4	B5	B6	D1 Ø
ELGD-TB-100	25	21	7	33.5	25.5	3	6
ELGD-TB-120							
	D2 Ø	D3	D4	D5 Ø	H1 ±0.1	H2	H3
ELGD-TB-100	3.4	M2	M4	4	12.5	40.6	17
ELGD-TB-120						42.1	18.5
	H4	H5	L1	L2	L3	L4	L5
ELGD-TB-100	11	15	30	17	160	86	72
ELGD-TB-120	12.5						
	L6	L7	L8	L9	L10	T1	
ELGD-TB-100	47	79	42	34	33.5	1	
ELGD-TB-120		114.5					

Datasheet


Dimensions – Drive shaft adapter EAMB-...

Download CAD data → www.festo.com

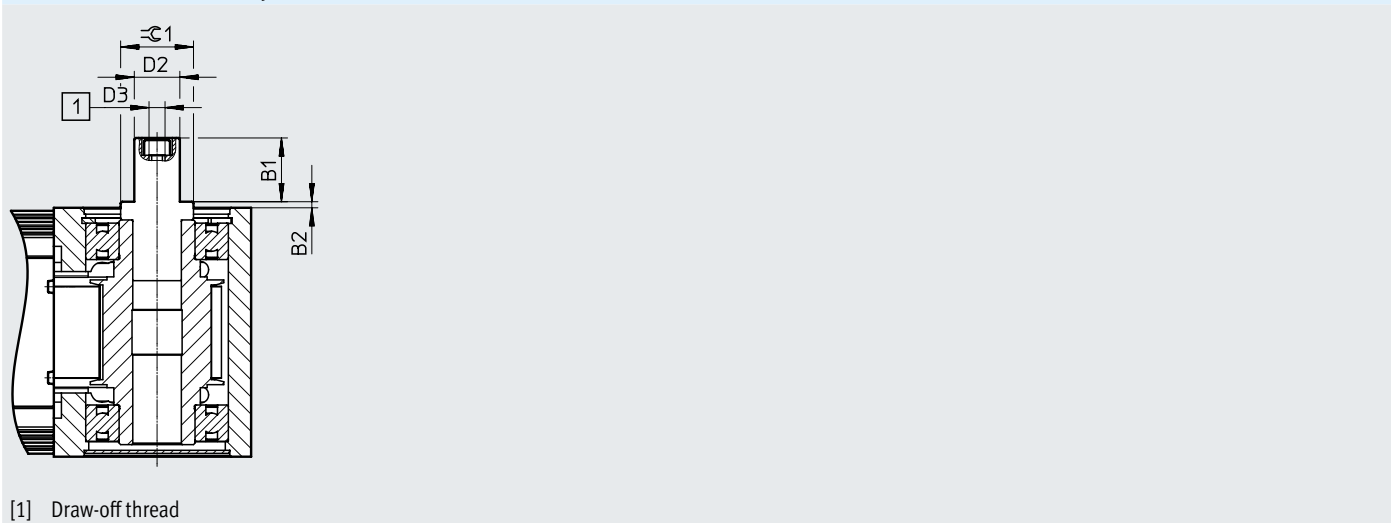


		B1	B2	D2 ø h7	D3	± 0.1
EAMB-18-9-8X16-10X12	ELGD-TB-100	12	1.8	8	M5	15
EAMB-24-6-15X21-16X20	ELGD-TB-120	21	2	15	M6	21

Datasheet

Ordering data		Size	Stroke [mm]	Part no.	Type
	100	200		8192374	ELGD-TB-KF-WD-100-200-0H-L-PU2
		300		8192375	ELGD-TB-KF-WD-100-300-0H-L-PU2
		500		8192376	ELGD-TB-KF-WD-100-500-0H-L-PU2
		600		8192377	ELGD-TB-KF-WD-100-600-0H-L-PU2
		800		8192378	ELGD-TB-KF-WD-100-800-0H-L-PU2
		1000		8192379	ELGD-TB-KF-WD-100-1000-0H-L-PU2
		1200		8192380	ELGD-TB-KF-WD-100-1200-0H-L-PU2
		1500		8192381	ELGD-TB-KF-WD-100-1500-0H-L-PU2
		1800		8192382	ELGD-TB-KF-WD-100-1800-0H-L-PU2
		2000		8192383	ELGD-TB-KF-WD-100-2000-0H-L-PU2
	120	200		8192384	ELGD-TB-KF-WD-120-200-0H-L-PU2
		300		8192385	ELGD-TB-KF-WD-120-300-0H-L-PU2
		500		8192386	ELGD-TB-KF-WD-120-500-0H-L-PU2
		600		8192387	ELGD-TB-KF-WD-120-600-0H-L-PU2
		800		8192388	ELGD-TB-KF-WD-120-800-0H-L-PU2
		1000		8192389	ELGD-TB-KF-WD-120-1000-0H-L-PU2
		1200		8192390	ELGD-TB-KF-WD-120-1200-0H-L-PU2
		1500		8192391	ELGD-TB-KF-WD-120-1500-0H-L-PU2
		1800		8192392	ELGD-TB-KF-WD-120-1800-0H-L-PU2
		2000		8192393	ELGD-TB-KF-WD-120-2000-0H-L-PU2

Ordering data – Modular product system		Size	Stroke [mm]	Part no.	Type	More information → elgd-tb
	100	50 ... 8500		8176888	ELGD-TB-KF-WD-100-...	
	120	50 ... 8500		8176889	ELGD-TB-KF-WD-120-...	

Peripherals overview

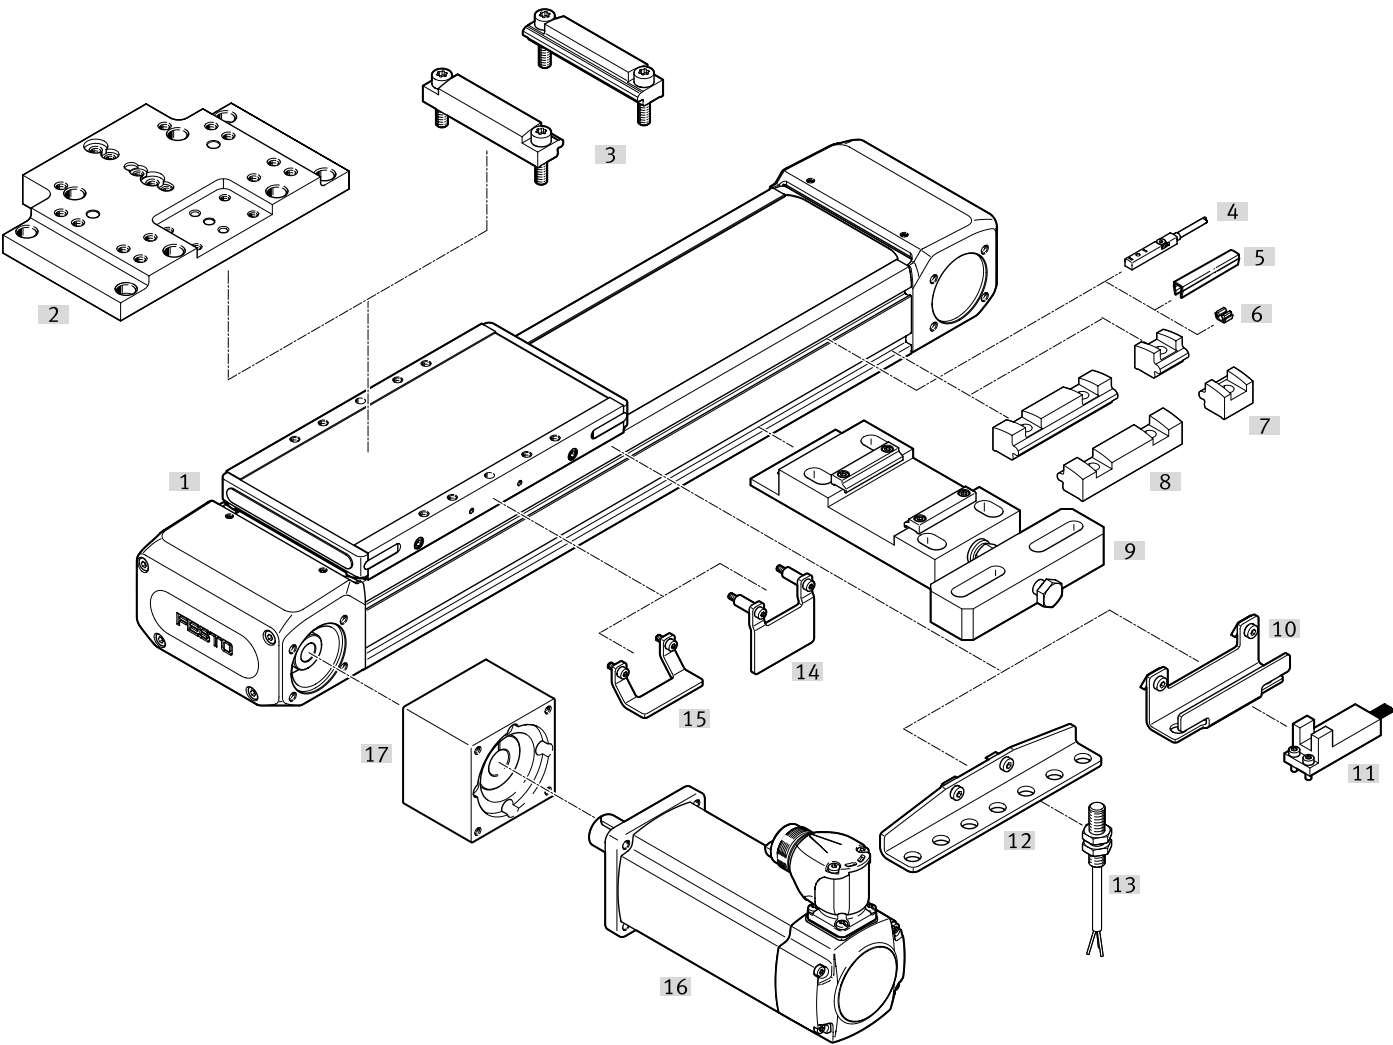


Peripherals overview

Accessories			
	Type	Description	→ Page/Internet
[1]	Toothed belt axis ELGD-TB-WD	Electric drive	elgd-tb
[2]	Mounting kit EAHM-E...-AP	For mounting mini slide DGST or EGSC on the slide	31
[3]	Profile mounting EAHF-E24-...-D...	For axis/axis mounting with adapter plate	30
[4]	Proximity switch, T-slot SIES-8M	Inductive proximity switch, for T-slot	32
[5]	Slot cover ABP-S	For protection against contamination	32
[6]	Clip SMBK	For mounting the proximity switch cable in the slot	32
[7]	Profile mounting EAHF-E24-...-S	For mounting the axis on the side of the profile	30
[8]	Profile mounting EAHF-E24-...	For mounting the axis on the side of the profile	30
[9]	Adjusting kit EADC-E16	For mounting the axis on a vertical surface. Once mounted, the axis can be aligned horizontally	30
[10]	Sensor bracket EAPM-E24-SHO	For mounting third-party sensors on the axis	31
[11]	Sensor OMRON	Third-party sensor OMRON, EE-SX674 series	–
[12]	Sensor bracket EAPM-E24-SHE	For mounting the inductive proximity switches SIEN-M8 (round design) on the axis	31
[13]	Proximity switch, M8 SIEN-M8	Inductive proximity switch, round design	32
[14]	Switch lug EAPM-E24-SLS	For sensing the slide position using inductive proximity switch SIES-8M or for optical sensors (Omron) with sensor bracket EAPM-E24-SHO	31
[15]	Switch lug EAPM-E24-SLE	For sensing the slide position using inductive proximity switch SIEN-M8 (round design) and sensor bracket EAPM-E24-SHE	31
[16]	Motor EMMT	Motors and kits specially matched with the axis Detailed information: www.festo.com/catalogue/eamm Engineering tool: www.festo.com/x/electric-motion-sizing	emmt
[17]	Axial kit EAMM	For axial motor mounting	eamm-a

Accessories

Permitted axis/motor combinations for axial kits




Full information is available via the following link:

- Axis/motor combinations
- Permitted third-party motors
- Technical data
- Dimensions

For axial kits → [eamm-a](#)

Connecting shaft KSK



- For synchronising two base axes in gantry systems


Full information is available via the following link:

Connecting shaft → [ksk](#)


Profile mounting EAHF-E24-...-P-S

	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120, WD-100, WD-120	F1a	Anodised wrought aluminium alloy	18 g	8197128	EAHF-E24-60-P-S

Profile mounting EAHF-E24-...-P


	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 60, 80, 120, WD-100, WD-120	F1a	Anodised wrought aluminium alloy	71 g	8197132	EAHF-E24-60-P

Profile mounting EAHF-E24-...-P-D...


	Description ¹⁾	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	ELGD-60 on ELGD-WD-100 ¹⁾	F1a	Anodised wrought aluminium alloy	133 g	8197130	EAHF-E24-60-P-D6
	ELGD-80 on ELGD-WD-100			133 g	8197130	EAHF-E24-60-P-D6
	ELGD-80 on ELGD-120-L			165 g	8229954	EAHF-E24-60-P-D7
	ELGD-WD-100-L on ELGD-120-L			165 g	8229954	EAHF-E24-60-P-D7


1) With this combination, the axis is mounted off-centre on the slide (see dimension L13 on the dimensional drawing with long slide).


Adjusting kit EADC-E16


	Description	Adapter plate material	Product weight	Part no.	Type
	For size 120	Anodised wrought aluminium alloy	845 g	8234414	EADC-E16-120-E24


Accessories

Mounting kit EAHM-E...-AP						
	Description	For assembly	Adapter plate material	Product weight	Part no.	Type
	For size 120	DGST-20/25	Anodised aluminium	887 g	8238435	EAHM-E26-AP-120



Switch lug EAPM-E24-...-SLS						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 100, 120	F1a	Steel	32 g	8197117	EAPM-E24-60-SLS

Switch lug EAPM-E24-...-SLE						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 100, 120	F1a	Steel	20 g	8197116	EAPM-E24-60-SLE

Sensor bracket EAPM-E24-...-SHE						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 100, 120	F1a	Steel	103 g	8197123	EAPM-E24-60-SHE

Sensor bracket EAPM-E24-...-SHO						
	Description	Suitable for the production of Li-ion batteries	Material	Product weight	Part no.	Type
	For size 100, 120	F1a	Steel	67 g	8197121	EAPM-E24-60-SHO


Accessories

Proximity switch for T-slot, inductive						Datasheets → Internet: sies
	Type of mounting	Switching out-put	Electrical connection	Cable length [m]	Part no.	Type
N/O						
	Inserted in the slot from above, flush with the cylinder profile	PNP	Cable, 3-core	7.5	551386	SIES-8M-PS-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551387	SIES-8M-PS-24V-K-0.3-M8D
		NPN	Cable, 3-core	7.5	551396	SIES-8M-NS-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551397	SIES-8M-NS-24V-K-0.3-M8D
N/C						
	Inserted in the slot from above, flush with the cylinder profile	PNP	Cable, 3-core	7.5	551391	SIES-8M-PO-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551392	SIES-8M-PO-24V-K-0.3-M8D
		NPN	Cable, 3-core	7.5	551401	SIES-8M-NO-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551402	SIES-8M-NO-24V-K-0.3-M8D


Proximity switch M8 (round design), inductive					Datasheets → Internet: sien	
	Switching output	Electrical connection	Cable length [m]	Part no.	Type	
N/O						
	PNP	Cable, 3-core	2.5	150386	SIEN-M8B-PS-K-L	
	NPN		2.5	150384	SIEN-M8B-NS-K-L	
	PNP	Plug M8x1, 3-pin	–	150387	SIEN-M8B-PS-S-L	
	NPN		–	150385	SIEN-M8B-NS-S-L	
N/C						
	PNP	Cable, 3-core	2.5	150390	SIEN-M8B-PO-K-L	
	NPN		2.5	150388	SIEN-M8B-NO-K-L	
	PNP	Plug M8x1, 3-pin	–	150391	SIEN-M8B-PO-S-L	
	NPN		–	150389	SIEN-M8B-NO-S-L	

Slot cover ABP-5-S1						
	Description	Material	Pack size	Product weight	Part no.	Type
	For size 100, 120	ABS	2 every 0.5 m	13 g	563360	ABP-5-S1


Clip SMBK						
	Description	Pack size	Product weight	Part no.	Type	
	For size 100, 120	10	1 g	534254	SMBK-8	

Drive shaft adapter EAMB						
	Description	Transferable torque	Product weight	Part no.	Type	
	For size 100	12 Nm	29 g	558035	EAMB-18-9-8X16-10X12	
	For size 120	29 Nm	68 g	558036	EAMB-24-6-15X21-16X20	

Accessories

Ordering data – Encoder cables for displacement encoder, ELGD-...-M3				Datasheets → Internet: nebm	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part no.	Type
	Displacement encoder ELGD-...-M3	Motor controller CMMP-AS and CMMT-AS	5	1599105	NEBM-M12G8-E-5-S1G9-V3
			10	1599106	NEBM-M12G8-E-10-S1G9-V3
			15	1599107	NEBM-M12G8-E-15-S1G9-V3
			χ ¹⁾	1599108	NEBM-M12G8-E-...-S1G9-V3

1) Max. cable length: 25 m.

Ordering data – Adapter			
	Description	Part no.	Type
	Required in combination with the servo drive CMMT-AS as adapter between encoder cable NEBM-M12G8-...-V3 and interface X3 (position encoder 2)	8106112	NEFM-S1G9-K-0.5-R3G8