




Characteristics

At a glance

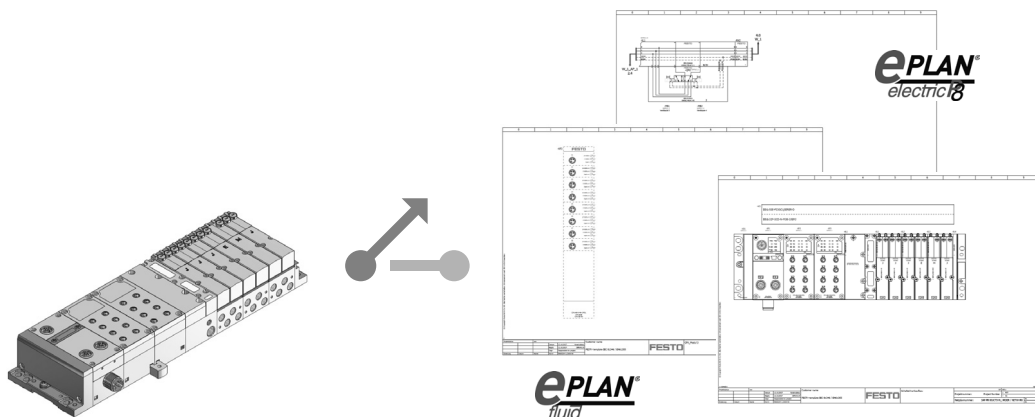

An automatically created EPLAN project is the simple solution when it comes to complex, configurable products. Festo offers a service for the automated compilation of a complete, correctly configured EPLAN project.

Overview



- Save time and costs with automated creation of EPLAN projects
- No time-consuming manual creation of documents from individual macros
- Available at any time via the web service
- Complete, correctly configured mechatronic model
- Automatically generated to IEC 61355, IEC 81346 and ISO 1219

Type code

001	Series	002	Medium
GDDE	EPLAN projects	PF	Project file


Ordering data

GDDE			
	Medium	Part no.	Type
	Project file	8077593	GDDE-PF

Configurable products with GDDE, Motion Terminal VTEM				
	Standard nominal flow rate, air flow 0.6->0.5 MPa (6->5 bar, 87->72.5 psi)	Standard nominal flow rate, exhaust 0.6->0.5 MPa (6->5 bar, 87->72.5 psi)	Part no.	Type
	450 l/min	480 l/min	8047502	VTEM

Configurable products with GDDE, servo press kit YJKP				
	Working stroke	Pressing force	Part no.	Type
	100 ... 400 mm	0 ... 17 kN	8077950	YJKP

Configurable products with GDDE, valve terminals MPA				
	Valve size	Max. standard nominal flow rate	Part no.	Type
	10 mm, 14 mm, 20 mm	360 l/min at 10 mm, 550 l/min at 14 mm, 700 l/min at 20 mm	539105	MPA-MPM-VI
			530411	MPA-FB-VI
	14 mm	780 l/min at 14 mm	575465	MPAC-VI
	10 mm, 14 mm, 20 mm	360 l/min at 10 mm, 550 l/min at 14 mm, 700 l/min at 20 mm	546279	MPA-ASI-VI
			569926	MPAL-VI

Configurable products with GDDE, valve terminal VTUG				
	Valve size	Max. standard nominal flow rate	Part no.	Type
	10 mm, 14 mm, 18 mm	330 l/min at 10 mm, 630 l/min at 14 mm, 1200 l/min at 18 mm	573606	VTUG
		380 l/min at 10 mm, 780 l/min at 14 mm, 1380 l/min at 18 mm	572230	VTUG-S

Ordering data

Configurable products with GDDE, valve terminals VTSA				
	Valve size	Max. standard nominal flow rate	Part no.	Type
	18 mm, 26 mm, 42 mm, 52 mm, 65 mm	550 l/min at 18 mm, 1100 l/min at 26 mm, 1300 l/min at 42 mm, 2900 l/min at 52 mm, 4000 l/min at 65 mm	555565	VTSA-ASI-NPT
			539216	VTSA-MP-NPT
			555564	VTSA-ASI
			539215	VTSA-MP
			539218	VTSA-FB-NPT
			539217	VTSA-FB
		700 l/min at 18 mm, 1350 l/min at 26 mm, 1860 l/min at 42 mm, 2900	547965	VTSA-F-FB
			555566	VTSA-F-ASI
			547963	VTSA-F-MP

Configurable products with GDDE, modular electrical terminal			
	Electrical control	Part no.	Type
	Fieldbus, Integrated controller	197330	CPX
		5237644	CPX-E