

Plastic tubing PAN-MF

FESTO



Characteristics

At a glance

Ideal for use in mobile pneumatics and meets standard DIN 73378

- Polyamide
- High thermal and mechanical load capacities
- Meets the requirements to DIN 73378 "Polyamide tubing for use in motor vehicles"
- Operating media: compressed air, mineral oil


Additional documents

Link [pan-mf](#)



The additional document TUBING-ADD contains further information on application details, such as tubing/fitting combinations, installation instructions and measurement procedures.

Ordering data - modular system



Configurable product

This product and all its product options can be ordered online via the configurator.

Engineering tools

Link [engineering tools](#)



Save time with engineering tools: Smart engineering for the optimal solution. Our goal is to increase your productivity. Our engineering tools play an integral part in achieving this goal. They help you size your system correctly, tap into unimagined productivity reserves and generate additional productivity along the entire value chain. In every phase of your project, from the initial contact to the modernisation of your machine, you will come across a number of different tools that will be of use to you.

- Flow calculation: Determine the nominal flow rate by entering parameters such as input pressure, output pressure, tube length and internal diameter (www.festo.com/x/flowrate-calculation).
- Media resistance: Evaluate the resistance of various types of materials and tubing from Festo to different chemicals and media (www.festo.com/x/media-resistance).

Diagrams

Link [pan-mf](#)



The diagrams shown in this document are also available online. These can be used to display precise values.

Alternative material characteristic

[MF] Automotive approval certificate (DIN 73378)

For applications with an extended temperature range as well as a high pressure range.

Pipe/tubing O.D. x wall thickness

For standard O.D. tubing, the outside diameter of the tube and the wall thickness are given as the tube size.

Packaging unit [m]

- Standard: 50 m
- In some cases, available in longer lengths on a reel.

Type code

001	Series	
PAN	Standard O.D. tubing	

002	Alternative material characteristic	
MF	Automotive approval certificate (DIN 73378)	

003	Pipe/tubing O.D. x wall thickness	
4x0,75	4x0.75 mm	
6x1	6x1 mm	
8x1	8x1 mm	
10x1,25	10x1.25 mm	
12x1,5	12x1.5 mm	
14x2	14x2 mm	
16x2	16x2 mm	


004	Colour	
SW	Black	

005	Packaging unit [m]	
	Standard	
500	500 m	

Datasheet

Operating and environmental conditions							
Outside diameter	4 mm	6 mm	8 mm	10 mm	12 mm	14 mm	16 mm
Inside diameter	2.5 mm	4 mm	6 mm	7.5 mm	9 mm	10 mm	12 mm
Pneumatic connection	For push-in connector O.D. 4 mm	For push-in connector O.D. 6 mm	For push-in connector O.D. 8 mm	For push-in connector O.D. 10 mm	For push-in connector outside diameter of 12 mm	For push-in connector outer diameter of 14 mm	For push-in connector O.D. 16 mm
Flow-relevant bending radius	15 mm	35 mm	50 mm	65 mm	70 mm	75 mm	130 mm
Min. bending radius	10 mm	15 mm	35 mm	45 mm	50 mm		75 mm
Temperature-dependent operating pressure	-0.095 ... 3.1 MPa	-0.095 ... 2.7 MPa	-0.095 ... 1.9 MPa			-0.095 ... 2.2 MPa	-0.095 ... 1.9 MPa
Temperature-dependent operating pressure	-0.95 ... 31 bar	-0.95 ... 27 bar	-0.95 ... 19 bar			-0.95 ... 22 bar	-0.95 ... 19 bar
Temperature-dependent operating pressure	-13.775 ... 449.5 psi	-13.775 ... 391.5 psi	-13.775 ... 275.5 psi			-13.775 ... 319 psi	-13.775 ... 275.5 psi
Conforms to standard	DIN 73378-PA12-PHL						
Operating medium	Compressed air to ISO 8573-1:2010 [7:-], Mineral oil						
Ambient temperature	-60 ... 100°C						
Tubing characteristics	Suitable for energy chains						


Operating pressure p as a function of temperature t

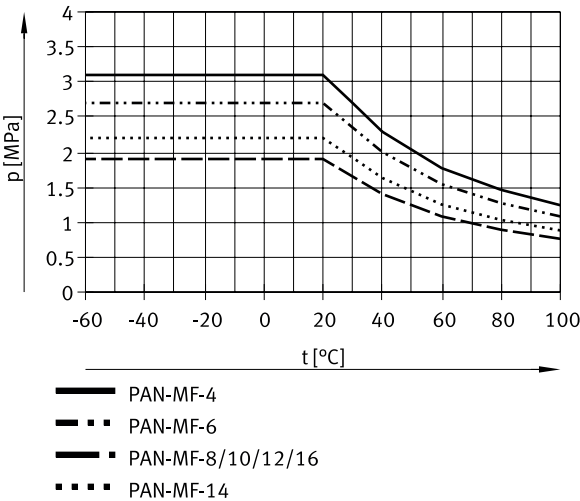

Materials	
Shore hardness	D 65 +/-3
Material tubing	PA12-P
Note on materials	RoHS compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Dimensions


Dimensions – Reel

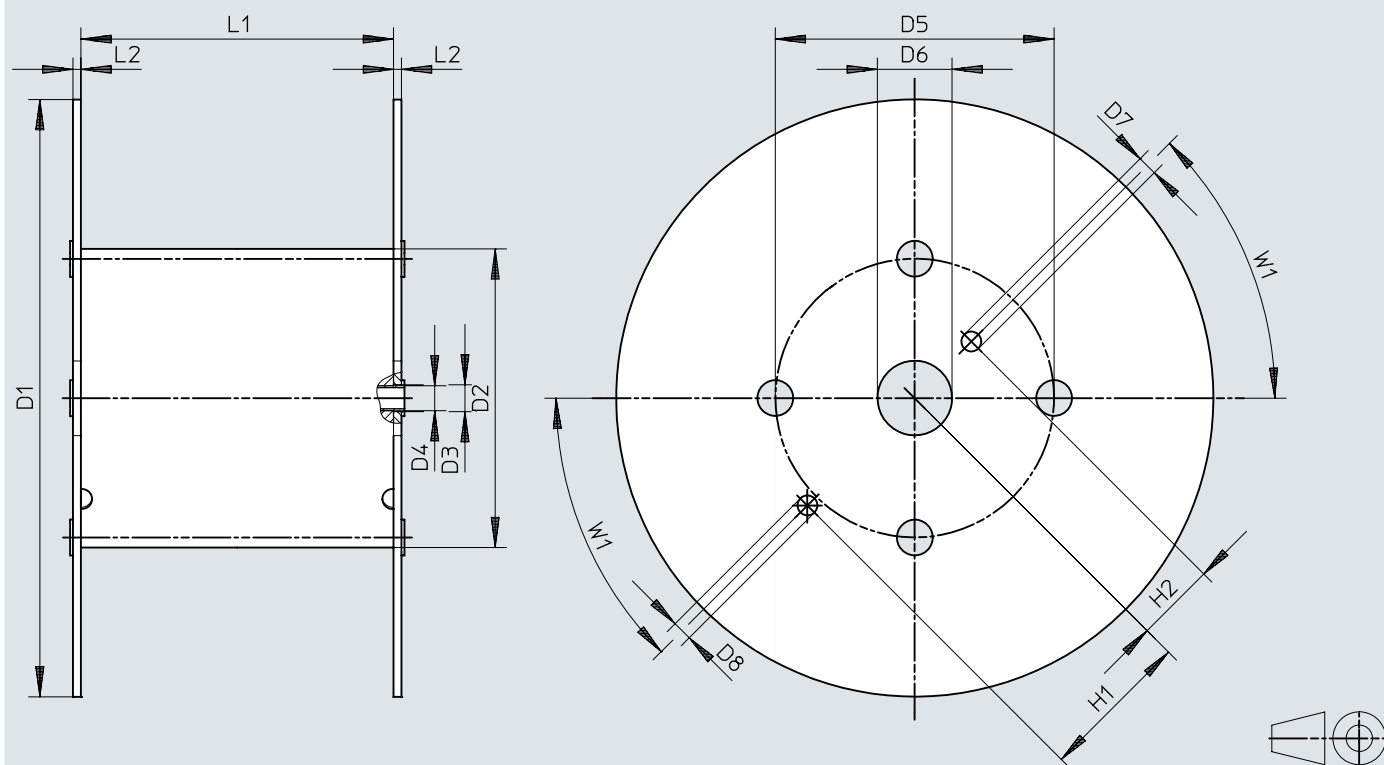[Download CAD data](http://www.festo.com) www.festo.com


	D1 Ø	D2 Ø	D3 Ø	D4 Ø	D5 Ø	D6 Ø	D7 Ø	D8 Ø	H1	H2	L1	L2	W1
PAN-MF-4x0,75-...-500	545	246	21	20	216	75	20	20	152,5	80,5	128	8	45°
PAN-MF-6x1-...-500	600	310	21	20	280	75	20	20	152,5	80,5	114	8	45°

Ordering data

Ordering data						
	Outside diameter	Packaging unit [m]	Product weight according to length	Colour	Part no.	Type
	4 mm	Standard	0.008 kg/m	Black	570357	PAN-MF-4X0,75-SW
		500 m			572091	PAN-MF-4X0,75-SW-500
	6 mm	Standard	0.016 kg/m		570358	PAN-MF-6X1-SW
		500 m			572093	PAN-MF-6X1-SW-500
	8 mm	Standard	0.022 kg/m		570359	PAN-MF-8X1-SW
	10 mm		0.035 kg/m		570360	PAN-MF-10X1,25-SW
	12 mm		0.051 kg/m		570361	PAN-MF-12X1,5-SW
	14 mm		0.077 kg/m		570362	PAN-MF-14X2-SW
	16 mm		0.09 kg/m		570363	PAN-MF-16X2-SW

Ordering data – Modular product system			
	Short type code	Part no.	Type
	PAN, PAN-MF, PAN-R	553610	PAN