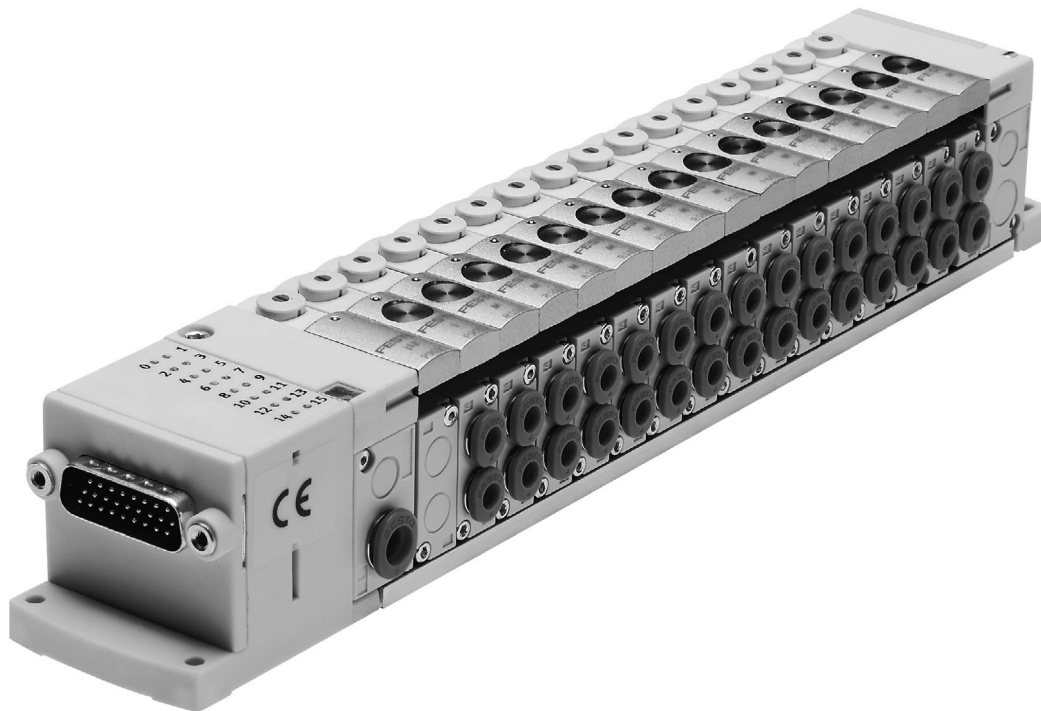


Valve terminal CPV-SC, Smart Cubic

FESTO



Key features



Innovative

- Small, compact valve terminal for a wide range of pneumatic applications
- Great flexibility during planning, assembly and operation
- Multi-pin interface
- Wide range of selectable valve functions; 5/2-way, 3/2-way and 2/2-way functions
- With a flow rate of 170 l/min, CPV-SC offers outstanding pneumatic performance for a wide range of applications
- Light weight

Versatile

- Provides 2 ... 16 valve positions on one terminal
- Particularly suitable for operation of small pneumatic drives in restricted installation space
- Flexibility of the pneumatic working ports provides a practical solution to different requirements
- Round silencers, integrated flat plate silencers or threaded/push-in connection for ducted exhaust air
- Suitable for vacuum
- Enables multiple pressure zones on a single valve terminal

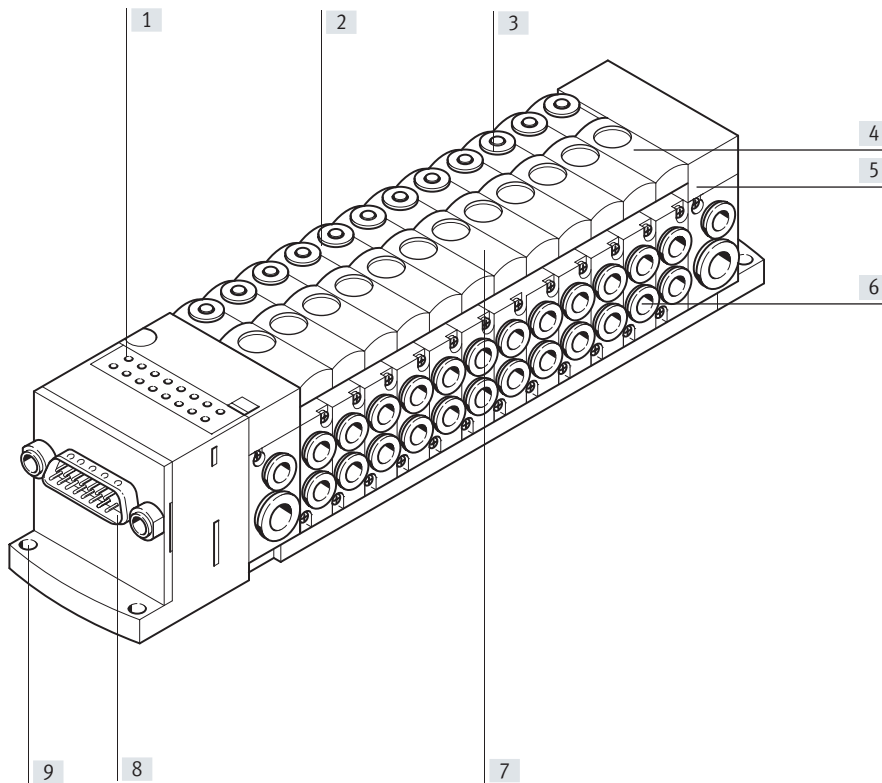
Reliable

- Manual override
- Durable thanks to tried-and-tested piston spool valves
- Sturdy thanks to metal housing and connecting thread
- Fast troubleshooting thanks to an LED on each valve and diagnostics via fieldbus

Easy to mount

- Fully assembled and tested valve terminal
- Reduced ordering, assembly and commissioning costs
- Suitable for direct mounting even on moving system components

Key features



- [1] Reduced downtimes: light emitting diodes indicate the switching status
- [2] Valve size 10 mm
- [3] Reliable operation: manual override non-detenting and detenting
- [4] Simple to extend: blanking plates reserve space for additional valves
- [5] Space saving: Grid 40x40 mm Maximum 16 valves
- [6] Practical connection: thread or push-in connector
- [7] Comprehensive range of valve functions
- [8] Simple electrical connections: individual valve connection, Sub-D plug, ribbon cable
- [9] Quick to mount: secure directly using screws

Equipment options

Valve functions

- 5/2-way valve, single solenoid
- 5/2-way valve, double solenoid
- 3/2-way valve, normally open
- 3/2-way valve, normally closed
- 2/2-way valve, normally closed

Separator plate with additional compressed air supply

- Compressed air duct (1) closed
- Compressed air duct (1) and exhaust duct (3/5) closed

Blanking plate

- Plate without valve function for reserving a valve position

Electrical connection options

Individual connection

- 2 ... 16 valve positions/ max. 16 solenoid coils
- Individual connection, horizontal (H)
- Individual connection, vertical (T)


Multi-pin


- 4 ... 16 valve positions/ max. 16 solenoid coils
- Sub-D
- Ribbon cable


CP interface

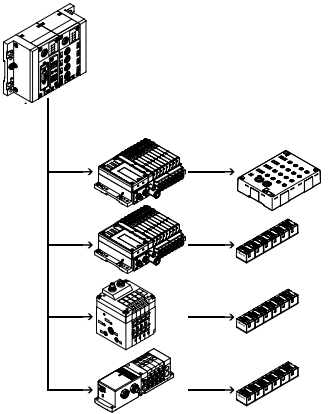
- 4 ... 16 valve positions/ max. 16 solenoid coils
- Additional valve terminals CPV-SC-CPI or from CPV series

Key features

Ordering data – Product options				
	Configurable product	The configurator can be found at	Part no.	Type
	This product and all its product options can be ordered using the configurator.	→ www.festo.com/catalogue/...	525675	CPV-SC-MP-VI
		Enter the part number or the type.	538510	CPV-SC-FB-VI

Individual connection			
	The connection is independent of the control technology and flexible using pre-assembled cables. This ensures that the connection is reverse polarity protected.	Valves with integrated LED (CPVSC1-M1LH- ...) are optionally available for switching status indication. 2 to 16 solenoid coils (divided between 2 to 16 valve positions) can be selected with individual connection.	Versions • Individual connection, horizontal • Individual connection, vertical • 2 to 16 solenoid coils

Multi-pin plug connection			
	Control signals to the valve terminal are transmitted via a pre-assembled multi-core cable, which substantially reduces installation time.	4 to 16 solenoid coils (divided between 4 to 16 valve positions) can be selected with multi-pin plug connection.	Versions • Sub-D connection • Ribbon cable connection • 4 to 16 solenoid coils

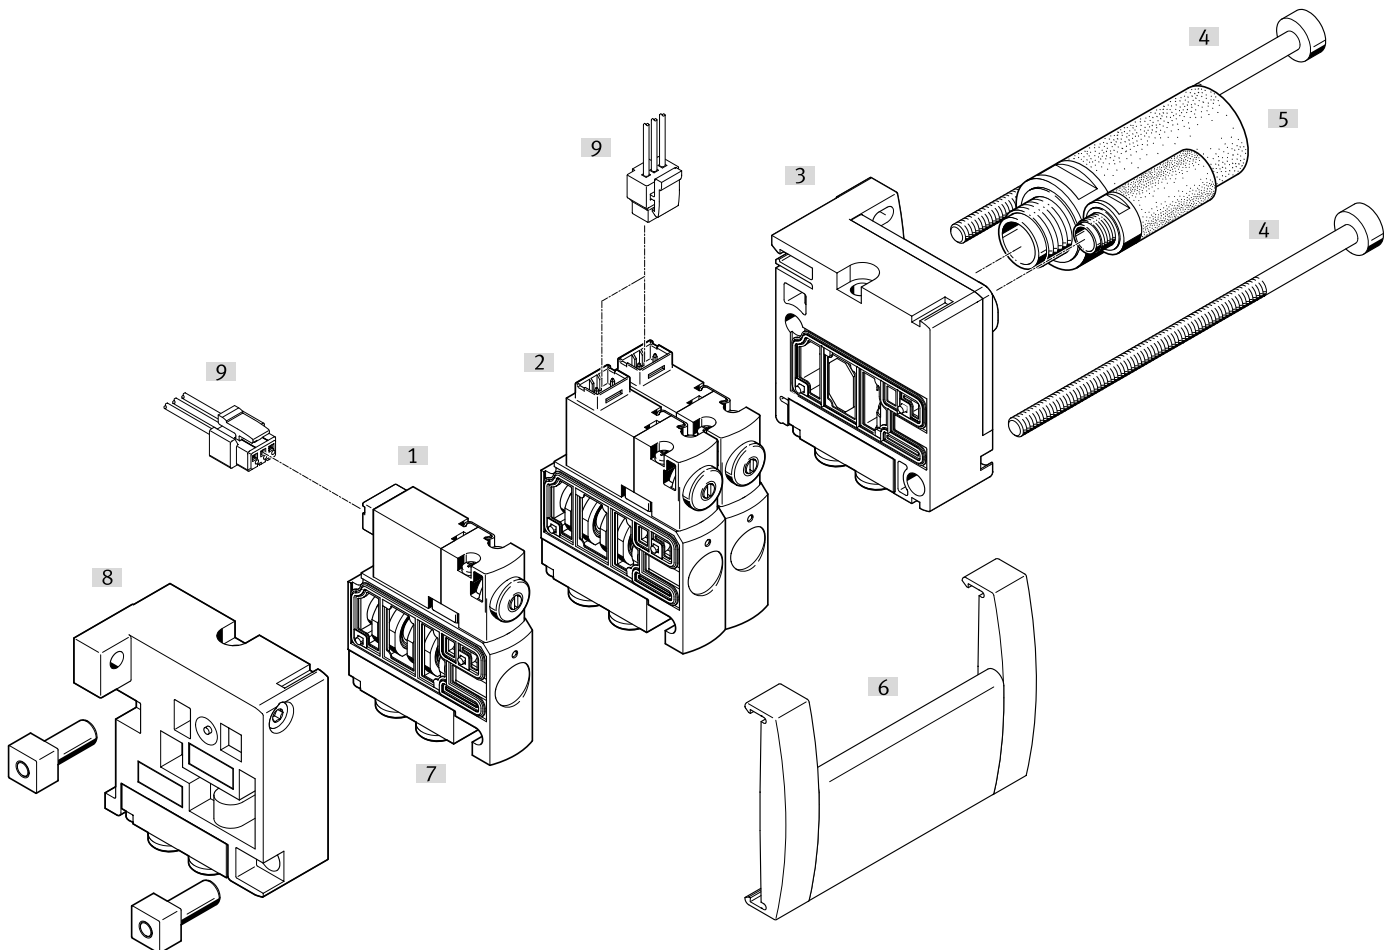
Installation system CPI			
	Valve terminal for installation system CPI: The valve terminal with CP connection is provided for connection to a higher-level bus node or to control blocks. A bus node or control block additionally enables connection of decentralised input/output units.	The following bus protocols are supported: • PROFIBUS DP • DeviceNet • CANopen • CC-Link • EtherNet/IP • PROFINET • POWERLINK • EtherCAT • Sercos III	Four strings having up to 32 inputs and outputs can be connected to a bus node or control block. The connecting cables transmit the power supply for the input modules and the load voltage for the valves as well as control signals.
			Additional information → Internet: cpi

Peripherals overview

Overview – CPV-SC valve terminal

Valve terminal with individual electrical connections

- Vertical individual connection
Code: T
 - Horizontal individual connection
Code: H
- Valve terminals with individual electrical connection can be equipped with 2 to max. 16 valve positions.
- Each valve position can either be equipped with a valve or a blanking plate.



- | | | | |
|--|---|--|------------------------------|
| [1] Valve with vertical individual connection | [4] Plug socket with cable for individual electrical connection of the valves | [6] Tie rod | [8] Inscription label holder |
| [2] Valve with horizontal individual connection | [5] Left-hand end plate for compressed air supply 1 or 12/14 | [7] Sub-base for working ports (push-in fitting or thread) | [9] Silencer |
| [3] Right-hand sub-base for unducted exhaust air | | | |

Peripherals overview

Valve terminal with electrical multi-pin plug connection

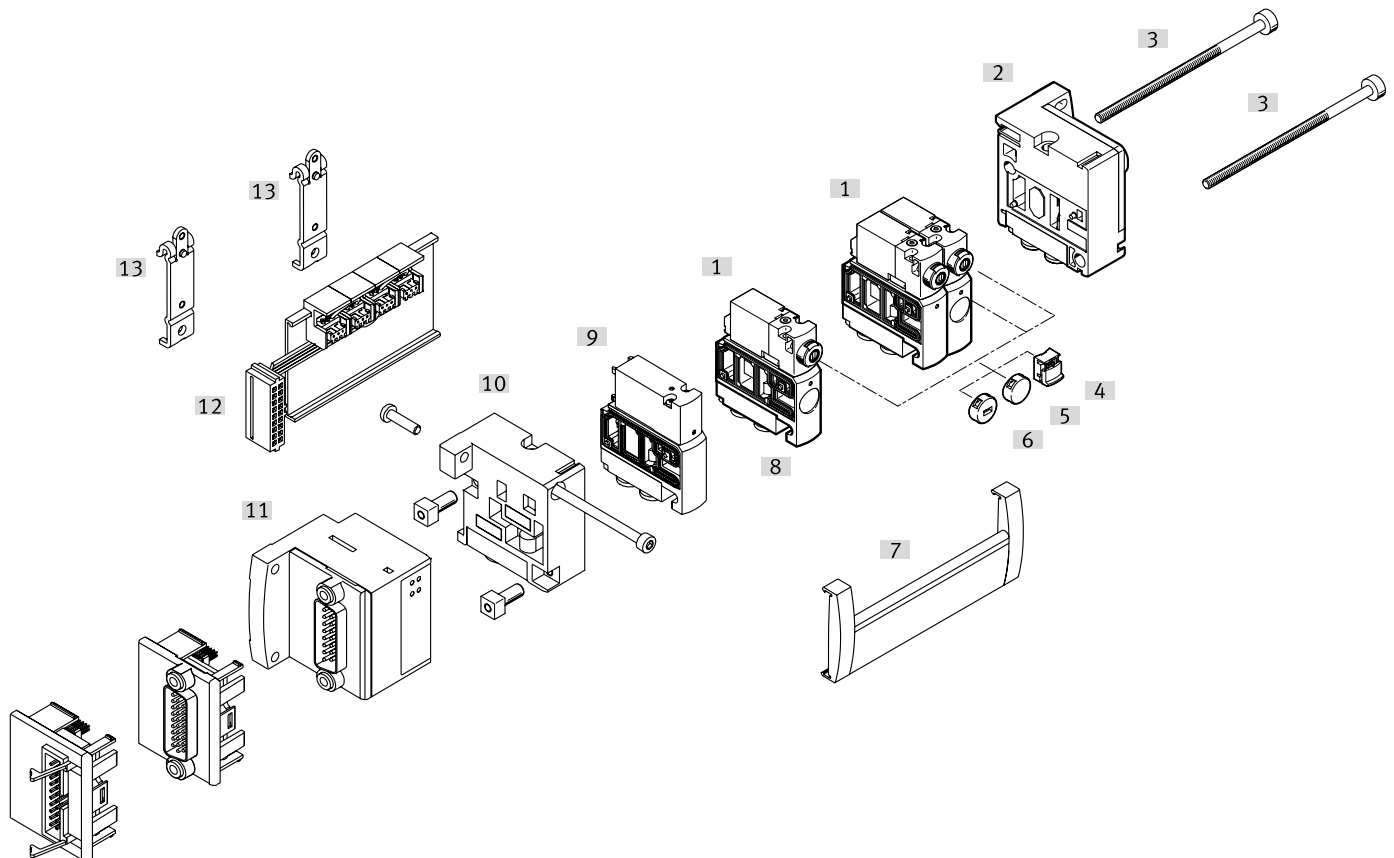
- 15-pin and 26-pin Sub-D multi-pin plug connection
 - Code: MS, MH
- or
- 20-pin multi-pin plug connection with connector for ribbon cable
 - Code: MF

Valves and end plates are the basic pneumatic components of the valve terminal.

The valve terminals are connected to the end plates using tie rods.

Valve terminals with electrical multi-pin plug connection can be equipped with 4 to max. 16 valve positions. Each valve position can either be equipped with a valve or a blanking plate.

The electrical connection is located on the left-hand side, enabling a particularly flat installation.



- [1] Electrical control unit (with LED switching status indications) for Sub-D plug or ribbon cable
- [2] Left-hand end plate for compressed air supply 1 or 12/14
- [3] Right-hand end plate for ducted exhaust air or silencer (3/5 or 82/84)

- [4] Valve
- [5] Cover cap for manual override, manually operated without accessories (code Y)

- [6] Cover cap for manual override, MO blocked (code V)
- [7] Cover cap coded, MO non-detenting (code K)
- [8] Sub-base for working ports (push-in fitting or thread)

- [9] Tie rod
- [10] Electrical valve linking module
- [11] Inscription label holder
- [12] H-rail mounting
- [13] Blanking plate for vacant position

Peripherals overview

Valve terminal with CPI connection

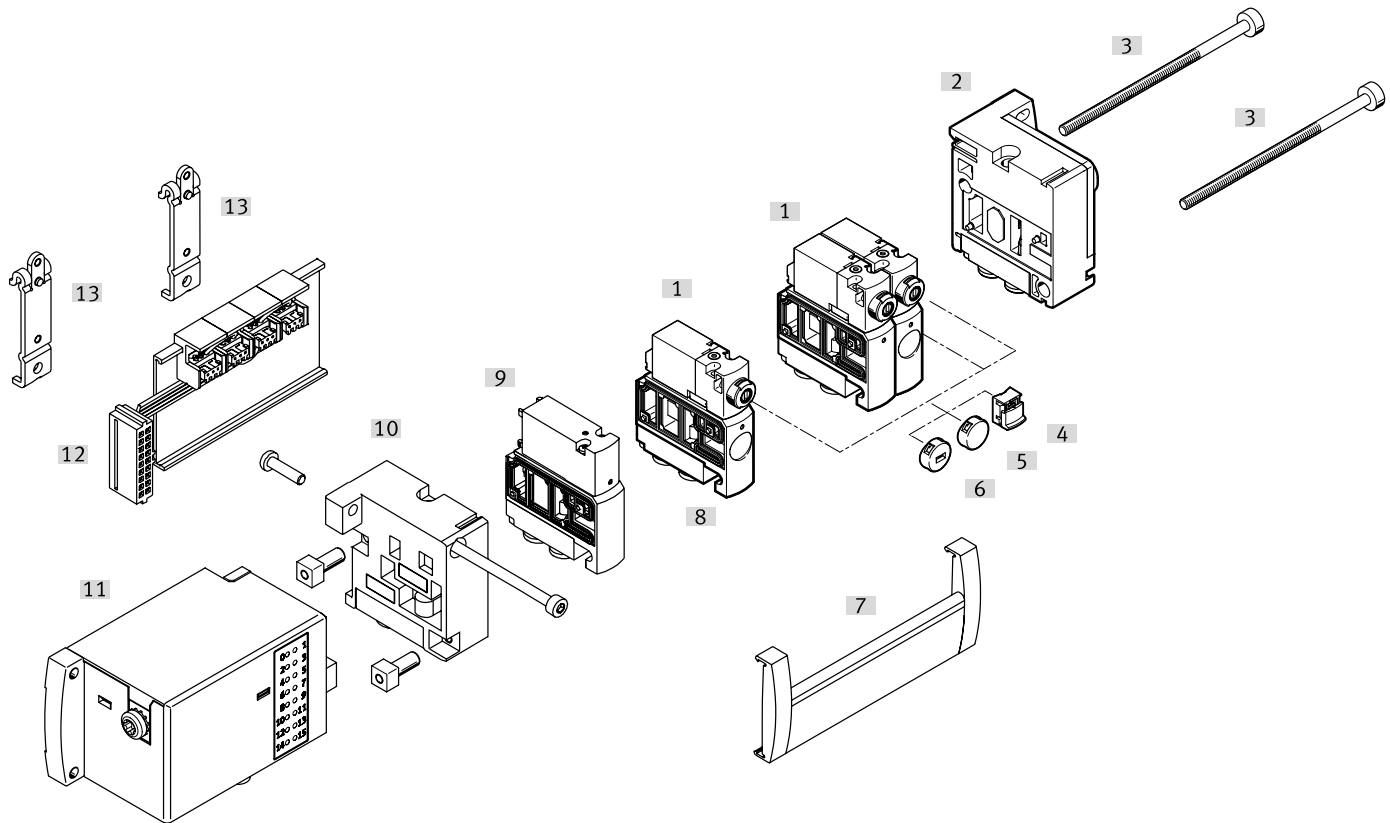
- CP interface M9, 5-pin
- Code: CP

Valves and end plates are the basic pneumatic components of the valve terminal.

The valve terminals are connected to the end plates using tie rods.

Valve terminals with CP interface can be equipped with 4 to max. 16 valve positions. Each valve position can either be equipped with a valve or a blanking plate.

The electrical connection is in the same direction as the tubing connection in order to save space.



- | | | | |
|--|---|--|---|
| [1] CPI connection | [5] Cover cap for manual override, manually operated without accessories (code Y) | [7] Cover cap coded, MO non-detenting (code K) | [10] Electrical valve linking module |
| [2] Left-hand end plate for compressed air supply 1 or 12/14 | [6] Cover cap for manual override, MO blocked (code V) | [8] Sub-base for working ports (push-in fitting or thread) | [11] Inscription label holder |
| [3] Right-hand end plate for ducted exhaust air or silencer (3/5 or 82/84) | | [9] Tie rod | [12] H-rail mounting |
| [4] Valve | | | [13] Blanking plate for vacant position |








Key features – Pneumatic components

Valves

Valves CPVSC1 are valves with integrated sub-bases, i.e. in addition to the valve function they also include all ducts for supply, exhaust and for the working connections. The supply ducts

are the central component of the valve slices and enable direct through flow. This makes it possible to achieve maximum flow rates. All valves have a pneumatic pilot control for optimising









performance. The valve function is based on a piston spool system with patented sealing principle, ensuring a broad range of applications and long service life.

Valve functions	Code	Circuit symbol	Valve size 10 mm	Description
	M		■	5/2-way valve, single solenoid • Pneumatic spring return
	N		■	3/2-way valve, single solenoid • Normally open • Pneumatic spring return
	K		■	3/2-way valve, single solenoid • Normally closed • Pneumatic spring return
	D		■	2/2-way valve, single solenoid • Normally closed • Pneumatic spring return
	J		■	5/2-way valve, double solenoid This valve consists of two valve housings and therefore occupies two valve positions. The pilot control with coil 12 is situated on the left and marked "J12". If both coils are actuated, the signal on port "14" dominates in the switching position.

Note

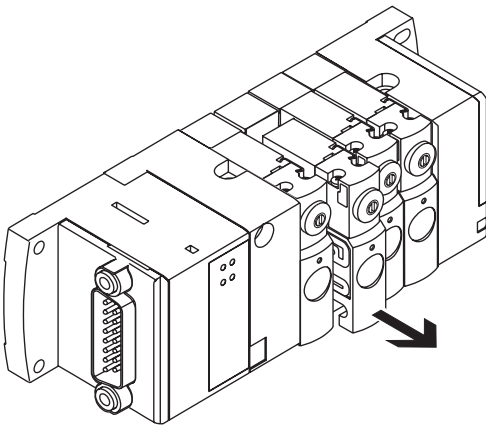
A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup with connector).

Key features – Pneumatic components

Valves				
Valve functions	Code	Circuit symbol	Valve size 10 mm	Description
Pneumatic supply plate with duct separation				
	T		■	Compressed air duct (1) closed For separating pressure zones with common exhaust. (Instructions for using pressure zones → page 11) Pneumatic connection QS -4, M5
	S		■	Compressed air duct (1) and exhaust duct (3/5) closed For separating pressure zones with separate exhaust. (Instructions for using pressure zones → page 11) Pneumatic connection QS -4, M5
Pneumatic supply plate without duct separation				
	U		■	Additional supply of compressed air (1) and additional exhaust (3/5). Pneumatic connection QS -4, M5
Blanking plate				
	L		■	Plate without valve function for reserving a valve position No pneumatic connection

When configuring the compressed air supply code S or T (exhaust via flat plate silencer), a push-in silencer UC-QS-4H is included for plates with supply port.

Key features – Pneumatic components

Design		
	Valve replacement	Extension
	Valves can be replaced quickly and easily in just a few movements. Separating seals between the valves are based on a metal support and are secured in place.	Valves can be ordered as accessories and are available with fully assembled sub-bases with QS push-in fittings or threaded connections. The valve terminal can thus be extended with additional functions by replacing blanking plates. Valves have the valve code on the front and the product type on the back to facilitate ordering.
	Materials	
	The valve housing and thread in the sub-bases are made of metal; further housing parts are made of sturdy plastic materials.	
		 Note The valve with working sub-base is a unit that has been tested for leakage by Festo.

Pilot air supply

The port for the main pneumatic supply is located on the left-hand end plate.
The ports differ for the following types of pilot air supply:

- Internal
- External

Internal pilot air supply
Internal pilot air supply can be selected if the terminal is working in an operating pressure range between 3 and 7 bar.
The pilot air supply is then branched from the compressed air supply 1 in the left-hand end plate using an internal connection. Port 12/14 is sealed with a blanking plug.

External pilot air supply
External pilot air supply must be used if the valve terminal CPV-SC is working in an operating pressure range of –0.9 to 3 bar. In this case, the pilot air is additionally supplied via port 12/14 on the left-hand end plate.

Creating pressure zones and separating exhaust air

The valve terminal CPV-SC can be operated with several pressure zones. For more than two pressure zones, a supply port with duct separation is required for each additional pressure zone. It always occupies one valve

position. An isolating disc T is used to separate the compressed air supply for groups of valves situated to the left and right of the compressed air supply. The pressure zone on the right is supplied at port 4 of the supply plate. Port

2 allows additional exhausting of the left-hand pressure zone. All exhaust ducts for the valves are connected to one another and exhausted via the right-hand end plate. An isolating disc S is used to separate the two exhaust

ducts 3 and 5 in addition to the pressure duct 1.

 Note		
Larger cylinders or those operated simultaneously generate a backpressure in the exhaust duct of the valve terminal; the level of this pressure depends on the exhaust capacity of the silencer. In order to prevent interaction with adjacent valves, valves	can be separated by means of duct separation using isolating disc S. The pressure zone situated to the left of an isolating disc S is exhausted via the supplied push-in silencer. If there are more than two valves in such a pressure zone, a further supply port	with additional exhaust may be necessary. It is therefore advantageous to have higher exhaust requirements in the pressure zone that is exhausted through the right-hand end plate.

Key features – Pneumatic components

Creating pressure zones		Code	Description
	S	S	Ducts 1 and 3/5 separated
	T	T	Duct 1 separate
Pneumatic working ports		Code	Description
Working port			
	B	B	M5 threaded connection
	E	E	QS-3 push-in connector
	F	F	QS-4 push-in connector
Supply port, left-hand end plate			
	C	C	Threaded connection • M7 (internal pilot air supply) • M5 and M7 (external pilot air supply)
	G	G	Push-in connector • QS-6 (internal pilot air supply) • QS-4 and QS-6 (external pilot air supply)

Key features – Pneumatic components

Ports for supply and exhaust

Supply and exhaust

A basic feature of a CPV-SC valve terminal are the two end plates. The left-hand end plate is for compressed air supply and the right-hand




one is for exhausting the valve terminal. The exhaust air escapes optionally through an integrated flat plate

silencer, a round silencer or through a push-in or threaded connection.

Connections for exhaust

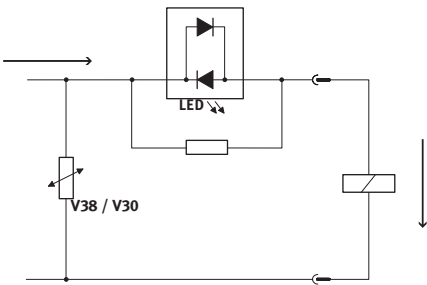
Code	Description
S	- Internal pilot air supply - Exhaust from duct 3/5 and 82/84 via a flat plate silencer - Replacement part (insert) for flat plate silencer type CPVSC1-UA
T	- External pilot air supply - Exhaust from duct 3/5 and 82/84 via a flat plate silencer - Replacement part (insert) for flat plate silencer type CPVSC1-UA
V	- Internal pilot air supply - Exhaust from duct 3/5 and 82/84 via ducted exhaust air
X	- External pilot air supply - Exhaust from duct 3/5 and 82/84 via ducted exhaust air
Y	- Internal pilot air supply - Exhaust from duct 3/5 and 82/84 via round silencer
Z	- External pilot air supply - Exhaust from duct 3/5 and 82/84 via round silencer

Key features – Pneumatic components

Pneumatic supply End plate combination		Code	Description
  		S	Internal pilot air supply Flat plate silencer For operating pressure in the range 3 ... 7 bar
		T	External pilot air supply Flat plate silencer For operating pressure in the range -0.9 ... +7 bar
		V	Internal pilot air supply Ducted exhaust air For operating pressure in the range 3 ... 7 bar
		X	External pilot air supply Ducted exhaust air For operating pressure in the range -0.9 ... +7 bar
		Y	Internal pilot air supply Round silencer For operating pressure in the range 3 ... 7 bar
		Z	External pilot air supply Round silencer For operating pressure in the range -0.9 ... +7 bar

Key features – Electrical components

Protective circuit



Each solenoid coil is protected with a spark arresting protective circuit as well as against polarity reversal.

Electrical multi-pin plug connection

There are two multi-pin connection types to choose from for valve terminal CPV-SC:


- Sub-D multi-pin plug connection (15-and 26-pin) or
- Multi-pin plug connection with contact strip for ribbon cable (20-pin)

The CPV-SC is connected via a multi-pin connection with Sub-D or ribbon cable. Each pin of the multi-pin plug is allocated to max. one valve position and thus to one coil or address.

Double-solenoid valves "J" occupy two valve positions. The left-hand valve position with pilot control 12 is controlled by the lower of the two address values.

Electrical multi-pin plug connection – Sub-D


Code MS, MH




With this electrical connection variant, all valves are controlled centrally via the 15- and 26-pin connector plug. The electrical connection is located on the left-hand side.

Ordering data – Sub-D connecting cable					
	Code	Description	Length [m]	Part no.	Type
	CP	15-pin for 12 coils (code MS)	2.5	527543	KMP6-15P-12-2.5
	CQ	Material: PVC	5	527544	KMP6-15P-12-5
	CR		10	527545	KMP6-15P-12-10
	CP	26-pin for 16 coils (code MH)	2.5	527546	KMP6-26P-16-2.5
	CQ	Material: PVC	5	527547	KMP6-26P-16-5
	CR		10	527548	KMP6-26P-16-10

Key features – Electrical components

Pin allocation for 15-pin Sub-D (code MS)				
KMP6-15P-12-...	Description	Pin	Wire colour	Address/coil
	Plug socket with cable for the valve terminal CPV-SC with max. 12 valve positions	1	White	Coil 0
		2	Brown	Coil 1
		3	Green	Coil 2
		4	Yellow	Coil 3
		5	Grey	Coil 4
		6	Pink	Coil 5
		7	Blue	Coil 6
		8	Red	Coil 7
		9	Black	Coil 8
	 Note The drawing shows a view of the Sub-D socket on the multi-pin cable KMP6-15P-12-...	10	Violet	Coil 9
		11	Grey-pink	Coil 10
		12	Red-blue	Coil 11
		13	White-green	n.c.
		14	Brown-green	0 V ¹⁾
		15	White-yellow	0 V ¹⁾


- 1) Pin 14 to pin 15 are bridged in the valve terminal
0 V for positive switching control signals; 24 V can be connected for negative switching control signals

Pin allocation for 26-pin Sub-D (code MH)				
KMP6-26P-16-...	Description	Pin	Wire colour	Allocation
	Plug socket with cable for the valve terminal CPV-SC with 16 valve positions	1	White	Coil 0
		2	Brown	Coil 1
		3	Green	Coil 2
		4	Yellow	Coil 3
		5	Grey	Coil 4
		6	Pink	Coil 5
		7	Blue	Coil 6
		8	Red	Coil 7
		9	Black	Coil 8
		10	Violet	Coil 9
		11	Grey-pink	Coil 10
		12	Red-blue	Coil 11
		13	White-green	Coil 12
		14	Brown-green	Coil 13
		15	White-yellow	Coil 14
		16	Yellow-brown	Coil 15
	 Note The drawing shows a view of the Sub-D socket on the multi-pin cable KMP6-26P-12-...	17	–	n.c.
		18	–	n.c.
		19	–	n.c.
		20	–	n.c.
		21	–	n.c.
		22	–	n.c.
		23	White-grey	0 V ¹⁾
		24	Grey-brown	0 V ¹⁾
		25	White-pink	0 V ¹⁾
		26	Pink-brown	0 V ¹⁾

- 1) Pin 17 to pin 22 are bridged in the valve terminal
0 V for positive switching control signals; 24 V can be connected for negative switching control signals

Key features – Electrical components

Electrical multi-pin plug connection – Connector for ribbon cable
Code MF




With this electrical connection variant, all valves are controlled centrally via the 20-pin connector plug. The electrical connection is located on the left-hand side.

Pin allocation – Connector for ribbon cable (code MF)		Pin	Allocation
A detailed diagram of the 20-pin connector plug. It shows a series of pins numbered 1 through 20. The pins are arranged in two rows of 10. The top row is labeled 20+, 18+, 16+, 14+, 12+, 10+, 8+, 6+, 4+, 2+ and the bottom row is labeled +19, +17, +15, +13, +11, +9, +7, +5, +3, +1. The pins are connected to a ribbon cable.	Valve terminal CPV-SC with up to 16 valve positions and 20-pin multi-pin socket for ribbon cables to DIN 41561-1, -2 or IEC 60603-13-C020FD-7C1E-2G	1	Coil 0
	Contact surface gold Ribbon cable with grid of 1.27 mm Conductor cross section 0.13 mm ²	2	Coil 1
		3	Coil 2
		4	Coil 3
		5	Coil 4
		6	Coil 5
		7	Coil 6
		8	Coil 7
		9	Coil 8
		10	Coil 9
		11	Coil 10
		12	Coil 11
		13	Coil 12
		14	Coil 13
		15	Coil 14
		16	Coil 15
		17	0 V ¹⁾
		18	0 V ¹⁾
		19	0 V ¹⁾
		20	0 V ¹⁾

1) Pin 17 to pin 20 are bridged in the valve terminal.

Key features – Electrical components

CP connection



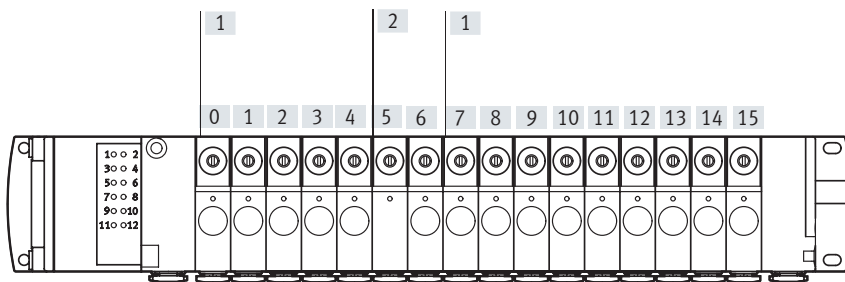
All CP valve terminals and CP modules are connected using a ready-to-install CP cable, and are attached to the CP interface. Four modules in each case, for example one valve terminal CPV-SC and one to three CP input modules, make up an installation string that ends at the CP interface.

The installation system supports a maximum of 4 installation strings that can be connected to a bus node. The CP interface of CPV-SC is represented in the CP/CPI system as a module having 16 outputs.

Additional information

→ Internet: cpi

Address allocation – Solenoid coils



Example:

Valve terminal in which valve positions 5 and 6 are prepared for a double-solenoid valve.

[1] Single solenoid valves occupy one valve position

[2] Double-solenoid valves occupy two valve positions

Addresses are allocated to valve positions on the CPV-SC from left to right. Each valve position occupies one address, regardless of whether a valve is mounted or not.

Double-solenoid valves "J" occupy two valve positions. The left-hand valve position with pilot control 12 is controlled by the lower of the two address values.

Key features – Display and operation

Display and operation

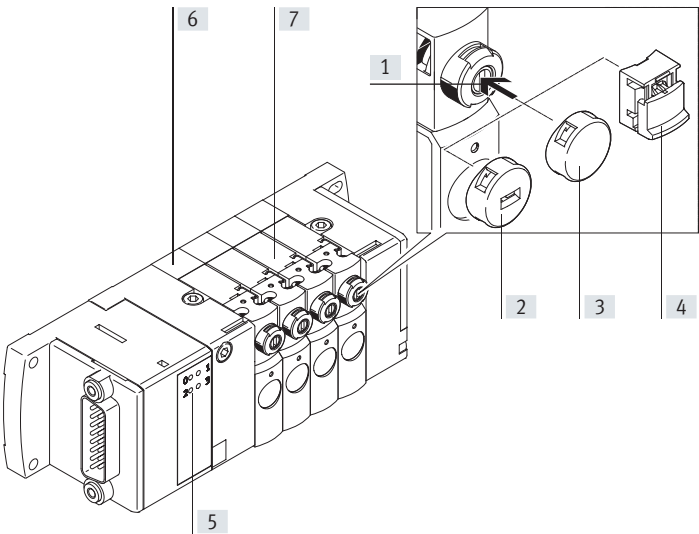
Each solenoid coil is assigned an LED on the command unit for switching status indication. Inscription labels (type MH-BZ-80x) can be applied to each valve for labelling purposes.

The manual override (MO) enables the valve to be switched when not electrically actuated or energised. The valve is switched by pushing the manual override. The set switching status can also be locked by turning the manual override.

The cover cap (detenting without accessories, code Y) can be used to operate the manual override without any tools. A cover can be fitted over the manual override to prevent it from being accidentally activated (code V).


Note
A manually operated valve (manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the mechanical manual override.

Manual override (MO)




- [1] Manual override, MO non-detenting or detenting by turning (code N – without cover cap)
- [2] Cover cap coded, MO non-detenting (code K – with coded cover cap)
- [3] Cover cap for manual override, MO blocked (code V)
- [4] Cover cap, MO manually operated without accessories (code Y – with cover cap)
- [5] LED signal status indication for each valve position
- [6] Numbering of valve positions
- [7] Location for valve position inscription label (type MH-BZ-80x)

MO with automatic return (non-detenting), code N – without cover cap




Manual override is actuated by pushing it with a pointed object or screwdriver and reset by spring force.

MO with lock (detenting), code N – without cover cap




Manual override remains active until it is reset with a screwdriver.

MO with automatic return (non-detenting), code K – with coded cover cap



MO is actuated by pushing it with a pointed object or screwdriver and reset by spring force (detenting position prevented by coded cover cap).

MO with lock (detenting without accessories), code Y – with cover cap

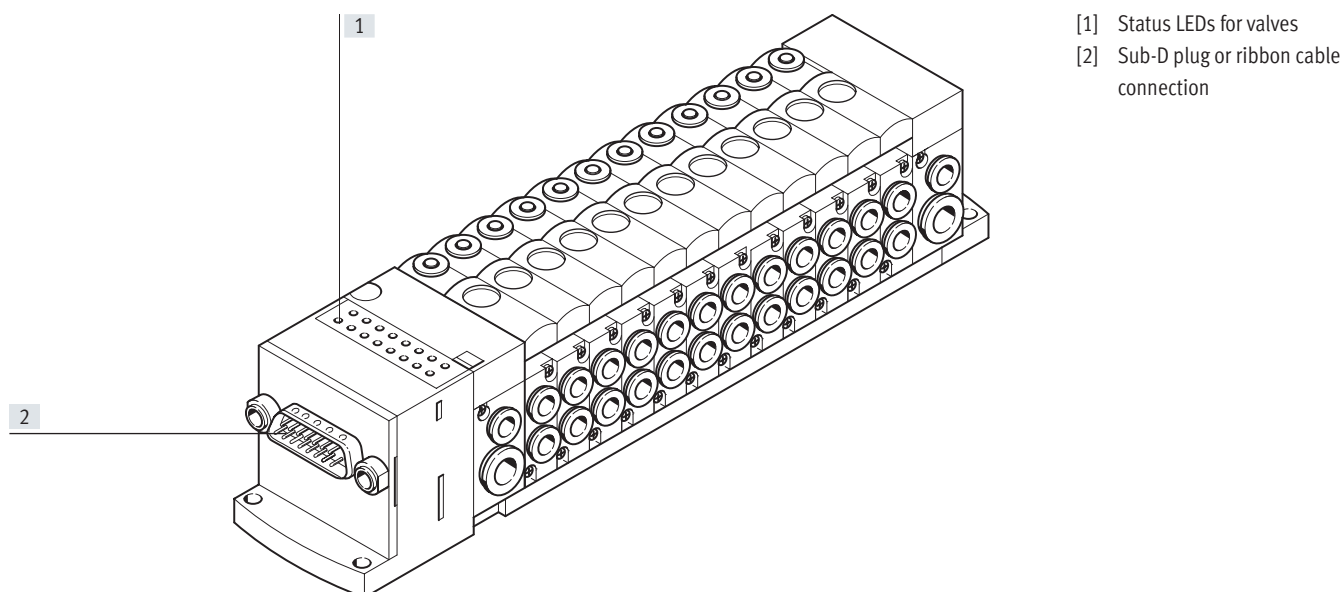


Manual override remains active until it is reset manually (without any aids).

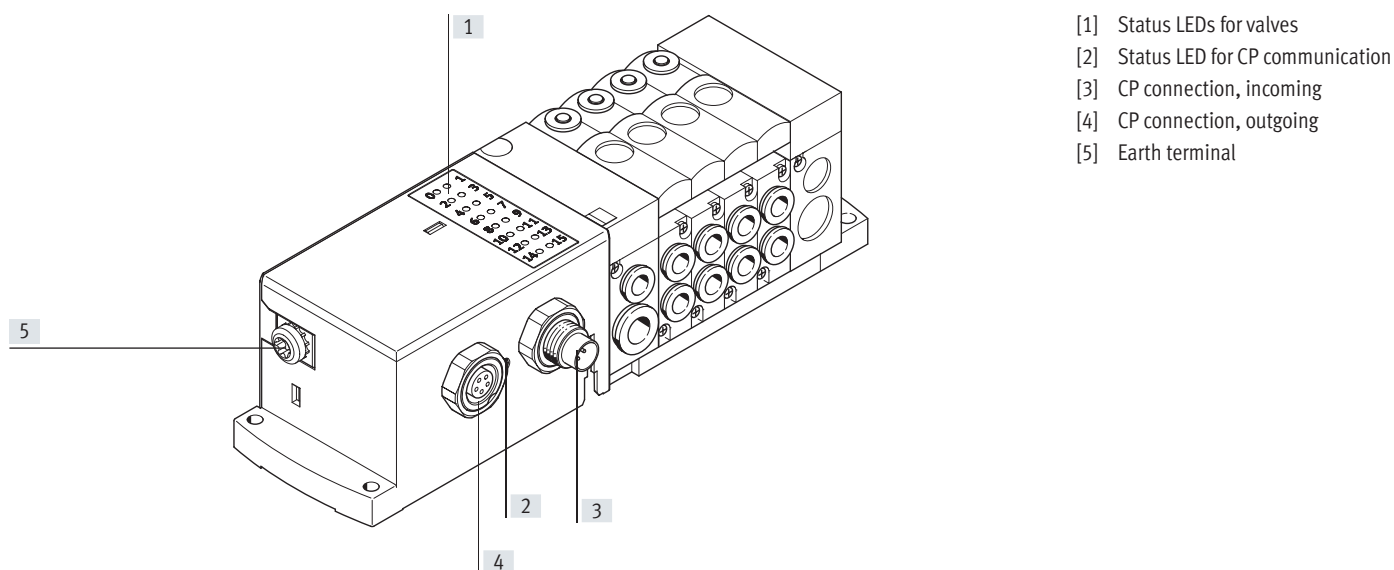
Key features – Display and operation

Display and operation


Multi-pin



CP interface

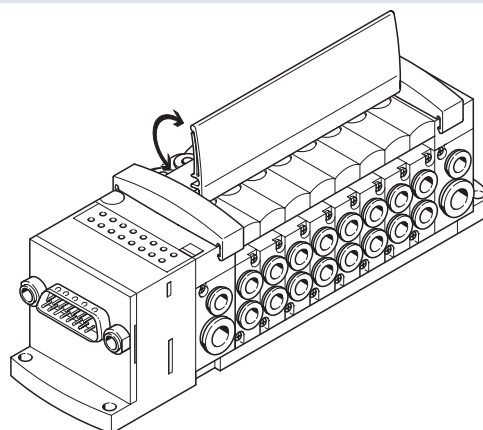


Inscription label holder



The transparent inscription label holder provides sufficient space for individually created labels on paper or film.

Labelling templates are available on the Festo website:
 → www.festo.com
 in the "Downloads" area under "Software".



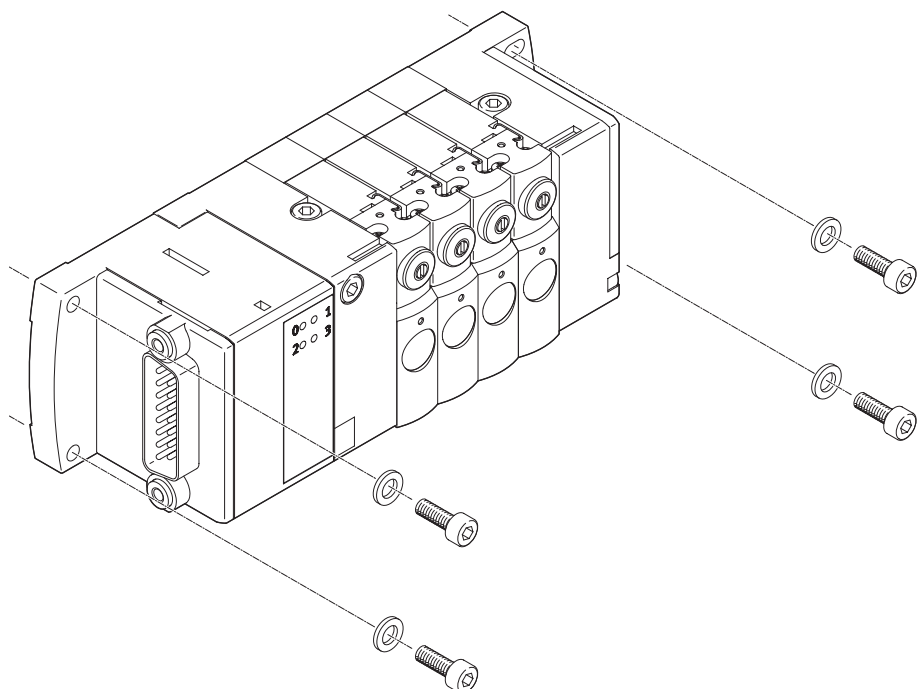
Key features – Types of mounting

Mounting – Valve terminal

Sturdy terminal mounting via:


- Four through-holes for wall mounting
- H-rail mounting

Wall mounting

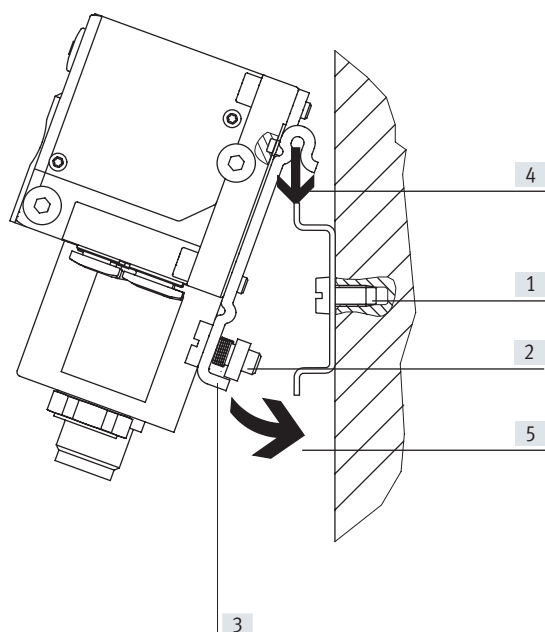


Mounting holes for screws M3

H-rail mounting



The mounting CPVSC1-HS35 facilitates mounting on an H-rail to EN 60715.



The valve terminal CPV-SC is attached to the H-rail → arrow [4]. It is then swivelled onto the H-rail and secured in place with the clamping component → arrow [5].

- [1] Holes for wall mounting
- [2] Self-tapping M4x10 screw for H-rail clamping unit
- [3] Clamping element of the H-rail clamping unit

Data sheet

Operating fluids

Operate your system with unlubricated compressed air if possible. Festo valves and cylinders are designed so that, if used as intended, they will not require additional lubrication and will still achieve a long service life. The quality of compressed air downstream of the compressor must correspond to that of unlubricated compressed air. If possible, do not operate the entire system with lubricated compressed air. The lubricators should, where possible, always be installed directly upstream of the cylinders used.

Incorrect additional oil and too high an oil content in the compressed air reduce the service life of the valve terminal. Use Festo special oil OFSW-32 or the alternatives listed in the Festo catalogue (as specified in DIN 51524 HLP32; basic oil viscosity 32 CST at 40°C).

Bio-oils

When using bio-oils (oils which are based on synthetic or native esters, e.g. rapeseed oil methyl ester), the maximum residual oil content of 0.1 mg/m³ must not be exceeded (see ISO 8573-1 Class 2).

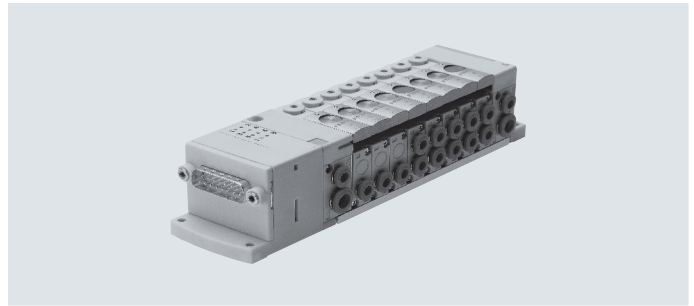
Mineral oils

When using mineral oils (e.g. HLP oils to DIN 51524, parts 1 to 3) or similar oils based on poly-alpha-olefins (PAO), the maximum residual oil content of 5 mg/m³ must not be exceeded (see ISO 8573-1 Class 4).

A higher residual oil content is not permitted, regardless of the compressor oil, because the permanent lubrication would otherwise be flushed out over a period of time.

Data sheet

-  - Flow rate
170 l/min
-  - Valve width
10 mm
-  - Voltage
5, 12, 24 V DC

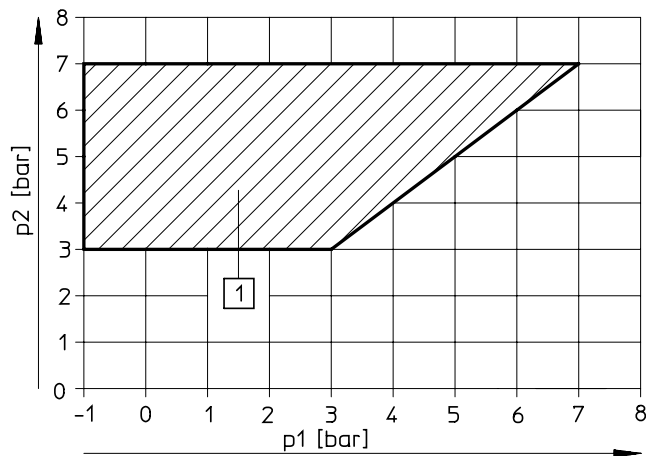


General technical data

Valve	5/2-way valve		3/2-way valve		2/2-way valve
	Single solenoid	Double solenoid	Normal position Open	Normal position Closed	Normal position Closed
Valve function order code	M	J	N	K	D
Design	Electromagnetically actuated piston spool valve				
Reset method	Pneumatic spring	–	Pneumatic spring	Pneumatic spring	Pneumatic spring
Valve size [mm]	10		10		10
Nominal width [mm]	2.5		2.5		2.5
Standard nominal flow rate [l/min]	170		170		150
Sealing principle	Soft				
Overlap	Positive overlap				
Type of control	Piloted				
Lubrication	Lifetime lubrication				
Type of mounting	Wall mounting				
Mounting position	Any				
Manual override	Non-detenting/detenting/covered				
Exhaust air function	Cannot be throttled				
Flow direction	Non-reversible				
Pneumatic connections					
Supply 1	M7, QS-6				
Exhaust port 3/5	M7, QS-6, round silencer or integrated flat plate silencer				
Working ports 2/4	Dependent on the connection type selected • M5 • QS-3 • QS-4				
Pilot air connection 12/14	M5, QS-4				
Pilot exhaust air port 82/84	M5, QS-4, round silencer or integrated flat plate silencer				

Data sheet

Pilot pressure p2 as a function of working pressure p1



[1] Operating range for valves with external pilot air supply

Valve switching times [ms]

Valve function order code		M	J	N	K	D
Switching times	On	10	–	10	10	10
	Off	10	–	10	10	10
	Changeover	–	8	–	–	–

Operating and environmental conditions		Fieldbus connection	Multi-pin plug connection
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4] → page 21	Compressed air to ISO 8573-1:2010 [7:4:4] → page 21
Note on the operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)	Lubricated operation possible (in which case lubricated operation will always be required)
Corrosion resistance class CRC		1 ¹⁾	1 ¹⁾
PWIS criterion		Free	Free
Certification		c UL us - Recognized (OL)	c UL us - Recognized (OL)
Operating pressure	[MPa]	–0.09 ... +0.7	–0.09 ... +0.7
	[bar]	–0.9 ... +7	–0.9 ... +7
Operating pressure for valve terminal with internal pilot air supply	[MPa]	0.3 ... 0.7	0.3 ... 0.7
	[bar]	3 ... 7	3 ... 7
Pilot pressure	[MPa]	0.3 ... 0.7	0.3 ... 0.7
	[bar]	3 ... 7	3 ... 7
Ambient temperature		–5 ... +50	–5 ... +50
Temperature of medium		–5 ... +50	–5 ... +50
CE marking (see declaration of conformity)		To EU EMC Directive ²⁾	To EU EMC Directive ²⁾
UKCA marking (see declaration of conformity)		To UK instructions for EMC ²⁾	–
KC mark		KC EMC	KC EMC
Note on materials		RoHS-compliant	RoHS-compliant

1) Corrosion resistance class CRC 1 according to Festo standard FN 940070

Low corrosion stress. Dry indoor application or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, or parts that are covered in the application (e.g. drive pins).

2) For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/cpv → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Data sheet

Electrical data			
Electrical control		Individual connection	
		Multi-pin	
		CP fieldbus	
Electromagnetic compatibility of the valve terminal CPV-SC with Sub-D or ribbon cable connection		Interference emission tested to DIN EN 61000-6-4, industry	
		Interference immunity ¹⁾ tested to DIN EN 61000-6-2, industry	
Protection against electric shock (protection against direct and indirect contact as per EN 60204-1/IEC 204)		Via PELV power supply	
Nominal operating voltage	Multi-pin plug connection	[V DC]	24
	Individual connection	[V DC]	5, 12, 24
Permissible voltage fluctuations		[%]	±10
Characteristic coil data	Nominal voltage	[V DC]	5, 12, 22, 24
	Electrical power consumption	[W]	1
Duty cycle ED		100% at 40°C ambient temperature	
Degree of protection to EN 60529		IP40 (in assembled state and with detenting plug)	
Relative humidity		[%]	90% at 40°C, non-condensing

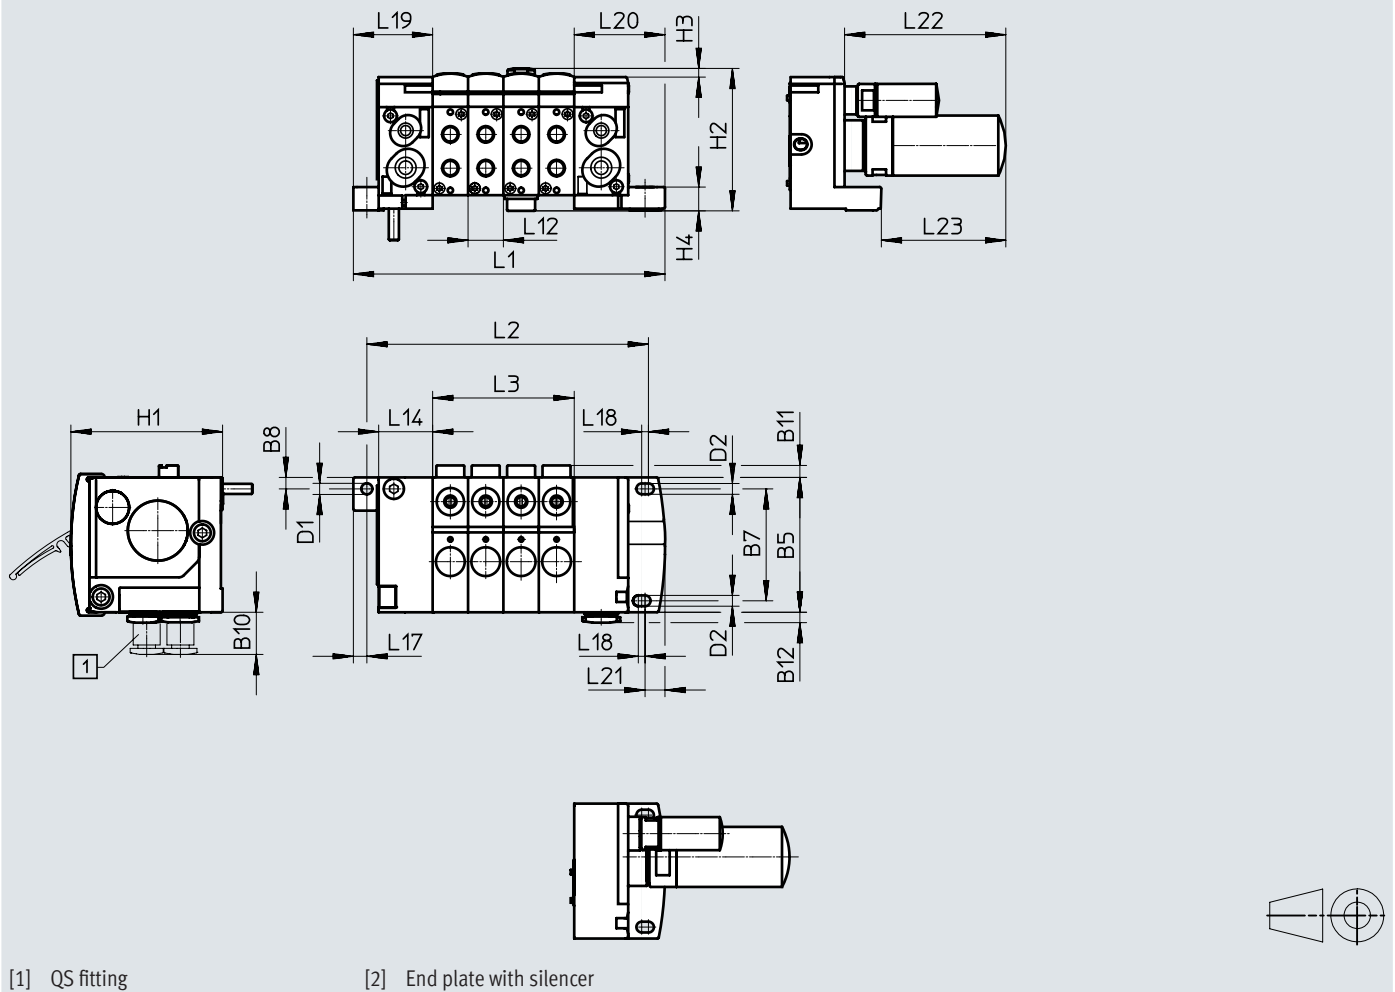
1) The maximum signal cable length is 10 m

Materials	
Electrical interface	Polymer
End plate, electrical sub-base	Polymer
Seals	NBR
Valve sub-base	Die-cast aluminium
Sub-base for working ports	PA

Product weight [g]	
Single solenoid valves (code M, N, K, D)	30.5
Double solenoid valves (code J)	56.5
Vacant position	22.5
Right-hand end plate	42.5
Left-hand end plate	28
Actuator housing	43
Tie rod, 16-fold	29.6
Electrical manifold module, 16-fold	64
Electrical interface CPI	150

Data sheet

Dimensions – With individual connection

Download CAD data → www.festo.com

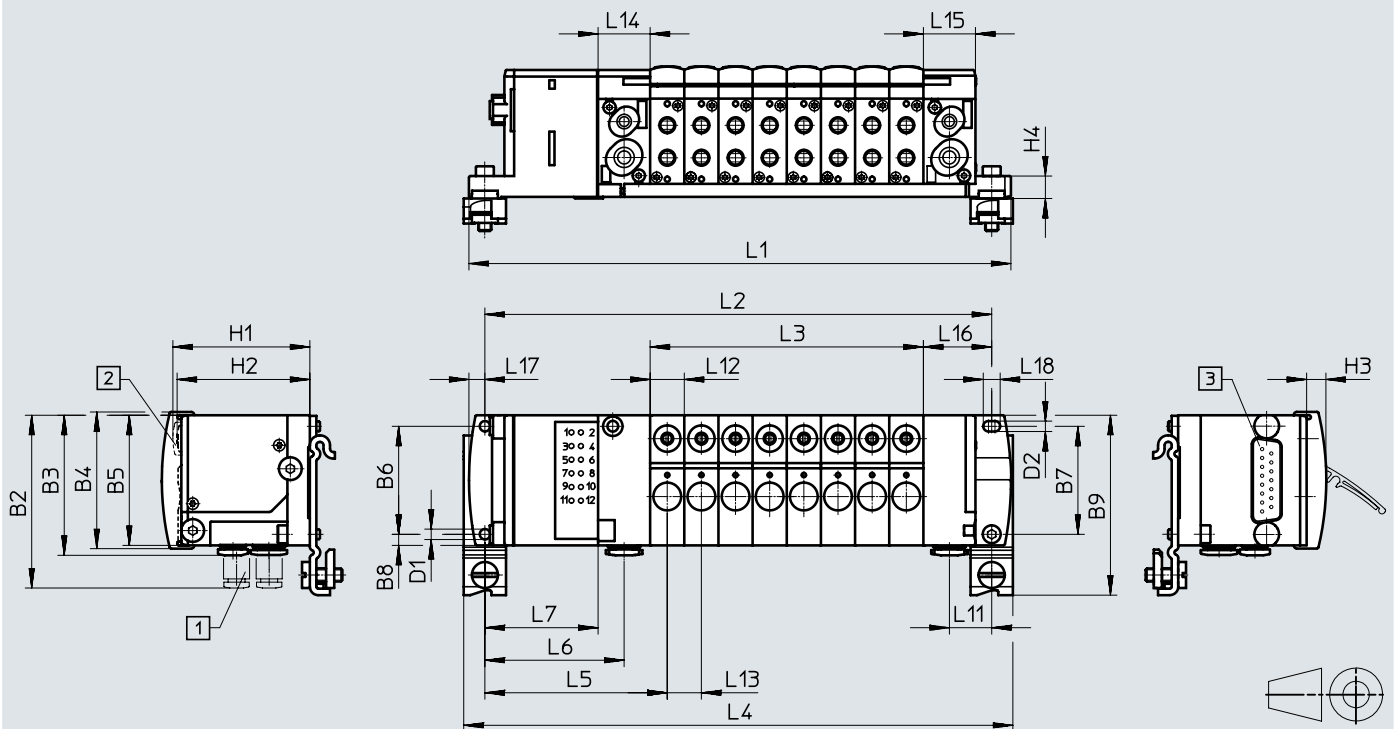
Type	B5	B7	B8	B10	B11	B12	D1 ø	D2 ø
With individual connection	40	33.2	3.4	10.5	3.6	3.1	3.3	3.2

Type	H1	H2	H3	H4	L12	L14	L17	L18	L19	L20	L21	L22	L23
With individual connection	45	42.2	2.6	6.9	10.5	16	4	2	23.5	26.9	4.9	48	37

Valve positions n	L1	L2	L3
2	71.4	62.5	21
3	81.9	73	31.5
4	92.4	83.5	42
5	102.9	94	52.5
6	113.4	104.5	63
7	123.9	115	73.5
8	134	125.1	84
9	144.9	136	94.5
10	155.4	146.5	105
11	165.9	157	115.5
12	176.4	167.5	126
13	186.9	178	136.5
14	197.4	188.5	147
15	207.9	199	157.5
16	218.4	209.5	168

Data sheet

Dimensions – With multi-pin plug connection

Download CAD data → www.festo.com


[1] QS fitting

[2] Cover cap





[3] Multi-pin connection with 20-pin ribbon cable or 15/26-pin Sub-D multi-pin connection

Type	B2	B3	B4	B5	B6	B7	B8	B9	D1 ø	D2 ø
With multi-pin plug connection	53.5	43.5	42	40	33.2	33.2	3.4	55.3	3.2	3.2

Type	H1	H2	H3	H4	L5	L6	L7	L11	L12	L13	L14	L15	L16	L17	L18
With multi-pin plug connection	43.4	42.1	6	6.9	56.1	42.8	34.8	13	10.5	10.5	16	16	21	4.9	5.2

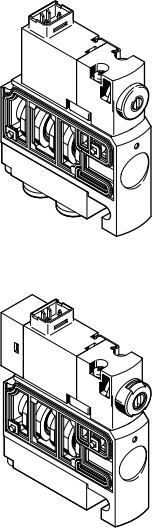
Valve positions n	L1	L2	L3
4	125	114	42
5	135.5	124.5	52.5
6	146	135	63
7	146.5	145.5	73.5
8	167	156	84
9	177.5	166.5	94.5
10	188	177	105
11	198.5	187.5	115.5
12	209	198	126
13	219.5	208.5	136.5
14	230	219	147
15	240.5	229.5	157.5
16	251	240	168

Accessories

Ordering data – Valves with electrical plug-in connection		Part no.	Type
 	Solenoid valve with M5 connections		
	5/2-way valve, single solenoid	527550	CPVSC1-M1H-M-P-M5
	5/2-way valve, double solenoid	527553	CPVSC1-M1H-J-P-M5
	3/2-way valve, normally open	527551	CPVSC1-M1H-N-P-M50
	3/2-way valve, normally closed	527552	CPVSC1-M1H-K-P-M5C
	2/2-way valve, normally closed	527554	CPVSC1-M1H-D-P-M5C
	Solenoid valve with QS-3 push-in connectors		
	5/2-way valve, single solenoid	527555	CPVSC1-M1H-M-P-Q3
	5/2-way valve, double solenoid	527558	CPVSC1-M1H-J-P-Q3
	3/2-way valve, normally open	527556	CPVSC1-M1H-N-P-Q30
	3/2-way valve, normally closed	527557	CPVSC1-M1H-K-P-Q3C
	2/2-way valve, normally closed	527559	CPVSC1-M1H-D-P-Q3C
	Solenoid valve with QS-4 push-in connectors		
	5/2-way valve, single solenoid	527560	CPVSC1-M1H-M-P-Q4
	5/2-way valve, double solenoid	527563	CPVSC1-M1H-J-P-Q4
	3/2-way valve, normally open	527561	CPVSC1-M1H-N-P-Q40
	3/2-way valve, normally closed	527562	CPVSC1-M1H-K-P-Q4C
	2/2-way valve, normally closed	527564	CPVSC1-M1H-D-P-Q4C
	Plates with integrated connections		
	Vacant position, with cover plate	527527	CPVSC1-RP-B
	Supply plate M5		
	Duct 1 separate	527528	CPVSC1-SP-P-M5
	Duct 1/3/5 separate	527530	CPVSC1-SP-PRS-M5
	Without duct separation	527532	CPVSC1-SP-M5
	Supply plate, QS-4 push-in connector		
	Duct 1 separate	527529	CPVSC1-SP-P-Q4
	Duct 1/3/5 separate	527531	CPVSC1-SP-PRS-Q4
	Without duct separation	527533	CPVSC1-SP-Q4



Accessories

Ordering data – Valves with individual electrical connection, detenting manual override, plug at top, 24 V DC

	Part no.	Type
	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	547276 CPVSC1-M1H-M-T-M5
	5/2-way valve, double solenoid	547277 CPVSC1-M1H-J-T-M5
	3/2-way valve, normally open	547275 CPVSC1-M1H-N-T-M50
	3/2-way valve, normally closed	547274 CPVSC1-M1H-K-T-M5C
	2/2-way valve, normally closed	547273 CPVSC1-M1H-D-T-M5C
	Solenoid valve with M5 connections and LED	
	5/2-way valve, single solenoid	547306 CPVSC1-M1LH-M-T-M5
	5/2-way valve, double solenoid	547307 CPVSC1-M1LH-J-T-M5
	3/2-way valve, normally open	547305 CPVSC1-M1LH-N-T-M50
	3/2-way valve, normally closed	547304 CPVSC1-M1LH-K-T-M5C
	2/2-way valve, normally closed	547303 CPVSC1-M1LH-D-T-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	547281 CPVSC1-M1H-M-T-Q3
	5/2-way valve, double solenoid	547282 CPVSC1-M1H-J-T-Q3
	3/2-way valve, normally open	547280 CPVSC1-M1H-N-T-Q30
	3/2-way valve, normally closed	547279 CPVSC1-M1H-K-T-Q3C
	2/2-way valve, normally closed	547278 CPVSC1-M1H-D-T-Q3C
	Solenoid valve with QS-3 push-in connectors and LED	
	5/2-way valve, single solenoid	547311 CPVSC1-M1LH-M-T-Q3
	5/2-way valve, double solenoid	547312 CPVSC1-M1LH-J-T-Q3
	3/2-way valve, normally open	547310 CPVSC1-M1LH-N-T-Q30
	3/2-way valve, normally closed	547309 CPVSC1-M1LH-K-T-Q3C
	2/2-way valve, normally closed	547308 CPVSC1-M1LH-D-T-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	547286 CPVSC1-M1H-M-T-Q4
	5/2-way valve, double solenoid	547287 CPVSC1-M1H-J-T-Q4
	3/2-way valve, normally open	547285 CPVSC1-M1H-N-T-Q40
	3/2-way valve, normally closed	547284 CPVSC1-M1H-K-T-Q4C
	2/2-way valve, normally closed	547283 CPVSC1-M1H-D-T-Q4C
	Solenoid valve with QS-4 push-in connectors and LED	
	5/2-way valve, single solenoid	547316 CPVSC1-M1LH-M-T-Q4
	5/2-way valve, double solenoid	547317 CPVSC1-M1LH-J-T-Q4
	3/2-way valve, normally open	547315 CPVSC1-M1LH-N-T-Q40
	3/2-way valve, normally closed	547314 CPVSC1-M1LH-K-T-Q4C
	2/2-way valve, normally closed	547313 CPVSC1-M1LH-D-T-Q4C


Accessories

Ordering data – Valves with individual electrical connection, detenting manual override, plug at rear, 24 V DC


	Part no.	Type
 	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	547291 CPVSC1-M1H-M-H-M5
	5/2-way valve, double solenoid	547292 CPVSC1-M1H-J-H-M5
	3/2-way valve, normally open	547290 CPVSC1-M1H-N-H-M50
	3/2-way valve, normally closed	547289 CPVSC1-M1H-K-H-M5C
	2/2-way valve, normally closed	547288 CPVSC1-M1H-D-H-M5C
	Solenoid valve with M5 connections and LED	
	5/2-way valve, single solenoid	547322 CPVSC1-M1LH-M-H-M5
	5/2-way valve, double solenoid	547323 CPVSC1-M1LH-J-H-M5
	3/2-way valve, normally open	547321 CPVSC1-M1LH-N-H-M50
	3/2-way valve, normally closed	547320 CPVSC1-M1LH-K-H-M5C
	2/2-way valve, normally closed	547318 CPVSC1-M1LH-D-H-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	547296 CPVSC1-M1H-M-H-Q3
	5/2-way valve, double solenoid	547297 CPVSC1-M1H-J-H-Q3
	3/2-way valve, normally open	547295 CPVSC1-M1H-N-H-Q30
	3/2-way valve, normally closed	547294 CPVSC1-M1H-K-H-Q3C
	2/2-way valve, normally closed	547293 CPVSC1-M1H-D-H-Q3C
	Solenoid valve with QS-3 push-in connectors and LED	
	5/2-way valve, single solenoid	547327 CPVSC1-M1LH-M-H-Q3
	5/2-way valve, double solenoid	547328 CPVSC1-M1LH-J-H-Q3
	3/2-way valve, normally open	547326 CPVSC1-M1LH-N-H-Q30
	3/2-way valve, normally closed	547325 CPVSC1-M1LH-K-H-Q3C
	2/2-way valve, normally closed	547324 CPVSC1-M1LH-D-H-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	547301 CPVSC1-M1H-M-H-Q4
	5/2-way valve, double solenoid	547302 CPVSC1-M1H-J-H-Q4
	3/2-way valve, normally open	547300 CPVSC1-M1H-N-H-Q40
	3/2-way valve, normally closed	547299 CPVSC1-M1H-K-H-Q4C
	2/2-way valve, normally closed	547298 CPVSC1-M1H-D-H-Q4C
	Solenoid valve with QS-4 push-in connectors and LED	
	5/2-way valve, single solenoid	547332 CPVSC1-M1LH-M-H-Q4
	5/2-way valve, double solenoid	547333 CPVSC1-M1LH-J-H-Q4
	3/2-way valve, normally open	547331 CPVSC1-M1LH-N-H-Q40
	3/2-way valve, normally closed	547330 CPVSC1-M1LH-K-H-Q4C
	2/2-way valve, normally closed	547329 CPVSC1-M1LH-D-H-Q4C

Accessories

Ordering data – Valves with individual electrical connection, non-detenting manual override, plug at top, 24 V DC


	Part no.	Type
	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	548037 CPVSC1-M1HT-M-T-M5
	5/2-way valve, double solenoid	548038 CPVSC1-M1HT-J-T-M5
	3/2-way valve, normally open	548036 CPVSC1-M1HT-N-T-M50
	3/2-way valve, normally closed	548035 CPVSC1-M1HT-K-T-M5C
	2/2-way valve, normally closed	548034 CPVSC1-M1HT-D-T-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	548043 CPVSC1-M1HT-M-T-Q3
	5/2-way valve, double solenoid	548044 CPVSC1-M1HT-J-T-Q3
	3/2-way valve, normally open	548042 CPVSC1-M1HT-N-T-Q30
	3/2-way valve, normally closed	548041 CPVSC1-M1HT-K-T-Q3C
	2/2-way valve, normally closed	548040 CPVSC1-M1HT-D-T-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	548048 CPVSC1-M1HT-M-T-Q4
	5/2-way valve, double solenoid	548049 CPVSC1-M1HT-J-T-Q4
	3/2-way valve, normally open	548047 CPVSC1-M1HT-N-T-Q40
	3/2-way valve, normally closed	548046 CPVSC1-M1HT-K-T-Q4C
	2/2-way valve, normally closed	548045 CPVSC1-M1HT-D-T-Q4C

Ordering data – Valves with individual electrical connection, non-detenting manual override, plug at rear, 24 V DC


	Part no.	Type
	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	548053 CPVSC1-M1HT-M-H-M5
	5/2-way valve, double solenoid	548054 CPVSC1-M1HT-J-H-M5
	3/2-way valve, normally open	548052 CPVSC1-M1HT-N-H-M50
	3/2-way valve, normally closed	548051 CPVSC1-M1HT-K-H-M5C
	2/2-way valve, normally closed	548050 CPVSC1-M1HT-D-H-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	548058 CPVSC1-M1HT-M-H-Q3
	5/2-way valve, double solenoid	548059 CPVSC1-M1HT-J-H-Q3
	3/2-way valve, normally open	548057 CPVSC1-M1HT-N-H-Q30
	3/2-way valve, normally closed	548056 CPVSC1-M1HT-K-H-Q3C
	2/2-way valve, normally closed	548055 CPVSC1-M1HT-D-H-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	548063 CPVSC1-M1HT-M-H-Q4
	5/2-way valve, double solenoid	548064 CPVSC1-M1HT-J-H-Q4
	3/2-way valve, normally open	548062 CPVSC1-M1HT-N-H-Q40
	3/2-way valve, normally closed	548061 CPVSC1-M1HT-K-H-Q4C
	2/2-way valve, normally closed	548060 CPVSC1-M1HT-D-H-Q4C

Accessories

Ordering data – Valves with individual electrical connection, detenting manual override, plug at top, 12 V DC


	Part no.	Type
	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	547367 CPVSC1-M5H-M-T-M5
	5/2-way valve, double solenoid	547368 CPVSC1-M5H-J-T-M5
	3/2-way valve, normally open	547366 CPVSC1-M5H-N-T-M50
	3/2-way valve, normally closed	547365 CPVSC1-M5H-K-T-M5C
	2/2-way valve, normally closed	547364 CPVSC1-M5H-D-T-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	547372 CPVSC1-M5H-M-T-Q3
	5/2-way valve, double solenoid	547373 CPVSC1-M5H-J-T-Q3
	3/2-way valve, normally open	547371 CPVSC1-M5H-N-T-Q30
	3/2-way valve, normally closed	547370 CPVSC1-M5H-K-T-Q3C
	2/2-way valve, normally closed	547369 CPVSC1-M5H-D-T-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	547377 CPVSC1-M5H-M-T-Q4
	5/2-way valve, double solenoid	547378 CPVSC1-M5H-J-T-Q4
	3/2-way valve, normally open	547376 CPVSC1-M5H-N-T-Q40
	3/2-way valve, normally closed	547375 CPVSC1-M5H-K-T-Q4C
	2/2-way valve, normally closed	547374 CPVSC1-M5H-D-T-Q4C

Ordering data – Valves with individual electrical connection, non-detenting manual override, plug at rear, 12 V DC


	Part no.	Type
	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	547382 CPVSC1-M5H-M-H-M5
	5/2-way valve, double solenoid	547383 CPVSC1-M5H-J-H-M5
	3/2-way valve, normally open	547381 CPVSC1-M5H-N-H-M50
	3/2-way valve, normally closed	547380 CPVSC1-M5H-K-H-M5C
	2/2-way valve, normally closed	547379 CPVSC1-M5H-D-H-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	547387 CPVSC1-M5H-M-H-Q3
	5/2-way valve, double solenoid	547388 CPVSC1-M5H-J-H-Q3
	3/2-way valve, normally open	547386 CPVSC1-M5H-N-H-Q30
	3/2-way valve, normally closed	547385 CPVSC1-M5H-K-H-Q3C
	2/2-way valve, normally closed	547384 CPVSC1-M5H-D-H-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	547392 CPVSC1-M5H-M-H-Q4
	5/2-way valve, double solenoid	547393 CPVSC1-M5H-J-H-Q4
	3/2-way valve, normally open	547391 CPVSC1-M5H-N-H-Q40
	3/2-way valve, normally closed	547390 CPVSC1-M5H-K-H-Q4C
	2/2-way valve, normally closed	547389 CPVSC1-M5H-D-H-Q4C

Accessories


Ordering data – Valves with individual electrical connection, detenting manual override, plug at top, 5 V DC

	Part no.	Type
	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	547337 CPVSC1-M4H-M-T-M5
	5/2-way valve, double solenoid	547338 CPVSC1-M4H-J-T-M5
	3/2-way valve, normally open	547336 CPVSC1-M4H-N-T-M50
	3/2-way valve, normally closed	547335 CPVSC1-M4H-K-T-M5C
	2/2-way valve, normally closed	547334 CPVSC1-M4H-D-T-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	547342 CPVSC1-M4H-M-T-Q3
	5/2-way valve, double solenoid	547343 CPVSC1-M4H-J-T-Q3
	3/2-way valve, normally open	547341 CPVSC1-M4H-N-T-Q30
	3/2-way valve, normally closed	547340 CPVSC1-M4H-K-T-Q3C
	2/2-way valve, normally closed	547339 CPVSC1-M4H-D-T-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	547347 CPVSC1-M4H-M-T-Q4
	5/2-way valve, double solenoid	547348 CPVSC1-M4H-J-T-Q4
	3/2-way valve, normally open	547346 CPVSC1-M4H-N-T-Q40
	3/2-way valve, normally closed	547345 CPVSC1-M4H-K-T-Q4C
	2/2-way valve, normally closed	547344 CPVSC1-M4H-D-T-Q4C


Ordering data – Valves with individual electrical connection, non-detenting manual override, plug at rear, 5 V DC


	Part no.	Type
	Solenoid valve with M5 connections	
	5/2-way valve, single solenoid	547352 CPVSC1-M4H-M-H-M5
	5/2-way valve, double solenoid	547353 CPVSC1-M4H-J-H-M5
	3/2-way valve, normally open	547351 CPVSC1-M4H-N-H-M50
	3/2-way valve, normally closed	547350 CPVSC1-M4H-K-H-M5C
	2/2-way valve, normally closed	547349 CPVSC1-M4H-D-H-M5C
	Solenoid valve with QS-3 push-in connectors	
	5/2-way valve, single solenoid	547357 CPVSC1-M4H-M-H-Q3
	5/2-way valve, double solenoid	547358 CPVSC1-M4H-J-H-Q3
	3/2-way valve, normally open	547356 CPVSC1-M4H-N-H-Q30
	3/2-way valve, normally closed	547355 CPVSC1-M4H-K-H-Q3C
	2/2-way valve, normally closed	547354 CPVSC1-M4H-D-H-Q3C
	Solenoid valve with QS-4 push-in connectors	
	5/2-way valve, single solenoid	547362 CPVSC1-M4H-M-H-Q4
	5/2-way valve, double solenoid	547363 CPVSC1-M4H-J-H-Q4
	3/2-way valve, normally open	547361 CPVSC1-M4H-N-H-Q40
	3/2-way valve, normally closed	547360 CPVSC1-M4H-K-H-Q4C
	2/2-way valve, normally closed	547359 CPVSC1-M4H-D-H-Q4C


Accessories

Ordering data – Valves without pilot control					Part no.	Type
	Valve with M5 connections					
	5/2-way valve, single solenoid				548901	CPVSC1-M-M5
	5/2-way valve, double solenoid				548902	CPVSC1-J-M5
	3/2-way valve, normally open				548900	CPVSC1-N-M50
	3/2-way valve, normally closed				548899	CPVSC1-K-M5C
	2/2-way valve, normally closed				548898	CPVSC1-D-M5C
	Valve with push-in connectors					
	5/2-way valve, single solenoid				548906	CPVSC1-M-QX
	5/2-way valve, double solenoid				548907	CPVSC1-J-QX
	3/2-way valve, normally open				548905	CPVSC1-N-QXO
	3/2-way valve, normally closed				548904	CPVSC1-K-QXC
	2/2-way valve, normally closed				548903	CPVSC1-D-QXC


Ordering data – Accessories					Part no.	Type
Pilot control					Data sheets → Internet: mh1	
	3/2-way solenoid valve, normally closed	Plug connection at rear	5 V DC	–	197000	MHA1-M4H-3/2G-0.6-HC
			12 V DC	–	197001	MHA1-M5H-3/2G-0.6-HC
			24 V DC	With signal status indication	540443	MHA1-M1LH-3/2G-0.6-HC
				–	197002	MHA1-M1H-3/2G-0.6-HC
		Plug connection on top	5 V DC	–	197003	MHA1-M4H-3/2G-0.6-TC
			12 V DC	–	197004	MHA1-M5H-3/2G-0.6-TC
			24 V DC	With signal status indication	540444	MHA1-M1LH-3/2G-0.6-TC
				–	197005	MHA1-M1H-3/2G-0.6-TC

CP interface						
	Electrical interface				541975	CPVSC1-AE16-CPI



Individual electrical connection				
	Plug socket with cable, IP40	0.5 m	566654	NEBV-H1G2-KN-0.5-N-LE2
		1 m	566655	NEBV-H1G2-KN-1-N-LE2
		2.5 m	566656	NEBV-H1G2-KN-2.5-N-LE2
		5 m	566657	NEBV-H1G2-KN-5-N-LE2

Connecting cable to IP40 for multi-pin plug connection				
	Sub-D, 15-pin, up to 12 valve positions for code MS Material: PVC	2.5 m	527543	KMP6-15P-12-2.5
		5 m	527544	KMP6-15P-12-5
		10 m	527545	KMP6-15P-12-10
	Sub-D, 26-pin, up to 16 valve positions for code MH Material: PVC	2.5 m	527546	KMP6-26P-16-2.5
		5 m	527547	KMP6-26P-16-5
		10 m	527548	KMP6-26P-16-10

Cover for manual override				
	Non-detenting, with coded cover cap	Pack of 10	540897	VMPA-HBT-B
	Covered, manual override blocked	Pack of 10	540898	VMPA-HBV-B
	Detenting, manually operated without accessories	Pack of 10	8002234	VAMC-L1-CD

Inscription labels for valve identification				
	9x4.5 mm	Pack of 80	197259	MH-BZ-80x

Accessories

Ordering data – Accessories			Part no.	Type
Inscription label holder				
	Pack of 1	For 2 valve positions	547395	CPVSC1-ST-2
		For 3 valve positions	547396	CPVSC1-ST-3
		For 4 valve positions	527631	CPVSC1-ST-4
		For 5 valve positions	547397	CPVSC1-ST-5
		For 6 valve positions	547398	CPVSC1-ST-6
		For 7 valve positions	547399	CPVSC1-ST-7
		For 8 valve positions	527633	CPVSC1-ST-8
		For 9 valve positions	547400	CPVSC1-ST-9
		For 10 valve positions	547401	CPVSC1-ST-10
		For 11 valve positions	547402	CPVSC1-ST-11
		For 12 valve positions	527635	CPVSC1-ST-12
		For 13 valve positions	547403	CPVSC1-ST-13
		For 14 valve positions	547404	CPVSC1-ST-14
		For 15 valve positions	547405	CPVSC1-ST-15
		For 16 valve positions	527637	CPVSC1-ST-16
Tie rod				
	Pack of 1	For 2 valve positions	547416	CPVSC1-ZA-2
		For 3 valve positions	547417	CPVSC1-ZA-3
		For 4 valve positions	532807	CPVSC1-ZA-4
		For 5 valve positions	547418	CPVSC1-ZA-5
		For 6 valve positions	547419	CPVSC1-ZA-6
		For 7 valve positions	547420	CPVSC1-ZA-7
		For 8 valve positions	532808	CPVSC1-ZA-8
		For 9 valve positions	547421	CPVSC1-ZA-9
		For 10 valve positions	547422	CPVSC1-ZA-10
		For 11 valve positions	547423	CPVSC1-ZA-11
		For 12 valve positions	532809	CPVSC1-ZA-12
		For 13 valve positions	547424	CPVSC1-ZA-13
		For 14 valve positions	547425	CPVSC1-ZA-14
		For 15 valve positions	547426	CPVSC1-ZA-15
		For 16 valve positions	532810	CPVSC1-ZA-16
Mounting				
	Screw for additional terminal mounting	527643	M3x45	
	Mounting	527639	CPVSC-HS35	
User documentation				
	User documentation – Pneumatics, valve terminal CPV-SC	German	530925	P.BE-CPVSC-DE
		English	530926	P.BE-CPVSC-EN
		French	530927	P.BE-CPVSC-FR
		Spanish	530928	P.BE-CPVSC-ES
		Italian	530929	P.BE-CPVSC-IT