

Angled socket MPPE

FESTO



Datasheet

General technical data

Electrical connection	8-pin, Angled socket, Solderable
Type of mounting	Via union nut
Mounting position	optional
Frequency of connection	500
Connection cross section	0.75 mm ²
Permissible current load	5 A
Cable fitting	Pg 9
Permissible cable diameter	6 ... 8 mm
Degree of protection	IP67
Product weight	65 g
Housing colour	Black

Operating and environmental conditions

Operational voltage range DC	≤60 V
Ambient temperature	-30 ... 95°C


Materials

Material housing	PA
Material union nut	PA
Material electrical contact	Copper, Tin-plated
LABS (PWIS) conformity	VDMA24364-B2-L

Dimensions

Dimensions – Angled plug socket

Download CAD data www.festo.com

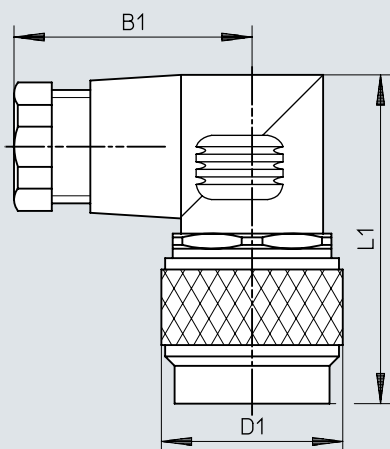

	B1	D1 Ø	L1
MPPE-3-B	31,5	24	43,5

Ordering data

Ordering data			
	Electrical connection	Part no.	Type
	8-pin, Angled socket, Solderable	161839	MPPE-3-B